




your BEST camera module partner

KLT-PC5693 V2.2 5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module





KLT-PC5693 V2.2 is a 5MP Auto Focus USB camera module based on 1/4" OV5693 image sensor. Auto Focus captures images clearly at different distances. It delivers high-speed, 2K resolution ultra sharp image.

The camera has a dedicated, high-performance auto focus function providing best-in-class image and video output. This camera module is ideal solution for drones, automotive, agriculture farming, medical equipment, and traffic monitoring.

Key Features

- 2592 x 1944 OmniVision OV5693 sensor
- High speed USB 2.0 Plug and Play
- MJPG and YUV2 output format
- Low power consumption
- Compact size
- UVC compliant to Windows, Linux, OS with UVC driver
- USB OTG (On-The-Go) support





your BEST camera module partner

KLT-PC5693 V2.2

5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module

Camera Module No.	KLT-PC5693 V2.2		
Resolution	5MP		
Image Sensor	OV5693		
Sensor Type	1/4"		
Pixel Size	1.4 um x 1.4 um		
EFL	3.20 mm		
F.NO	2.80		
Pixel	2592 x 1944		
View Angle	70.0°(DFOV) 58.6°(HFOV) 45.3°(VFOV)		
Lens Dimensions	8.50 x 8.50 x 5.65 mm		
Module Type	Auto Focus		
Interface	USB 2.0		
Output Format	MJPG / YUV2		
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure		
Audio	Yes		
Input Voltage	DC 5V		
Working Current	Max 500mA		
PCB Size	70.00 x 8.50 mm		
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port		
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam		
Lens Type	650nm IR Cut		
Operating Temperature	-30°C to +70°C		
USB Cable	USB Cable		

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi



















your BEST camera module partner

KLT-PC5693 V2.2 5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module



Top View



Side View



Bottom View



Mating Connector






your BEST camera module partner

KLT-PC5693 V2.2 5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module

FORMAT	RESOLUTION	FRAME RATE
	RESOLUTION	USB 2.0
MJPG	640 x 480 (VGA)	15 FPS
	1280 x 720 (720P)	15 FPS
	1920 x 1080 (1080P)	15 FPS
	2592 x 1944 (5MP)	15 FPS
YUV2	640 x 480 (VGA)	15 FPS
	1280 x 720 (720P)	10 FPS
	1920 x 1080 (1080P)	5 FPS
	2592 x 1944 (5MP)	3 FPS

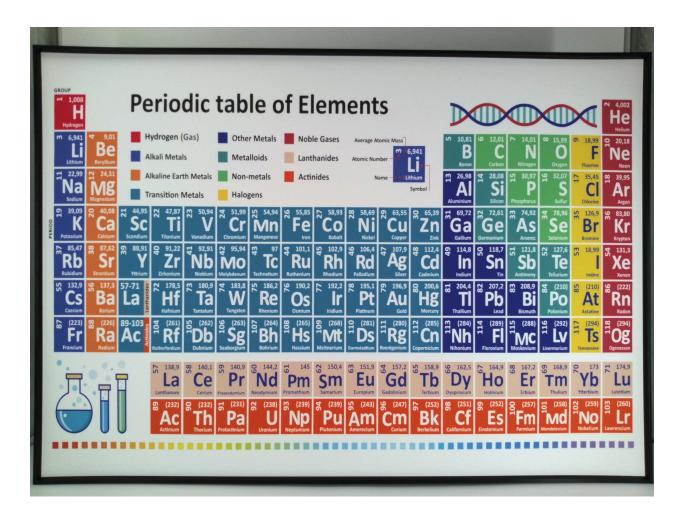





your BEST camera module partner










your BEST camera module partner




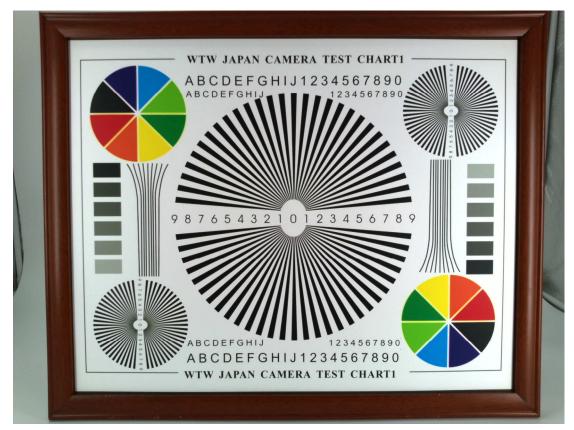






your BEST camera module partner

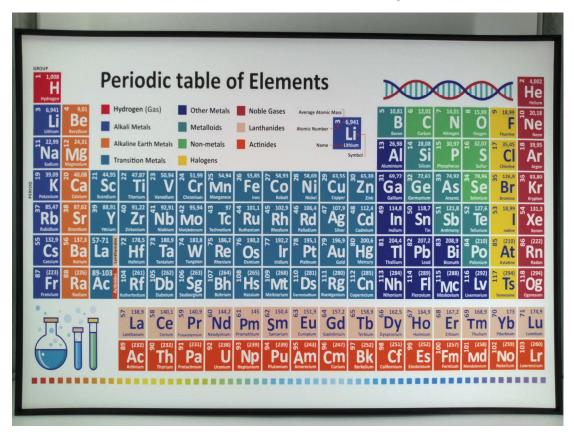

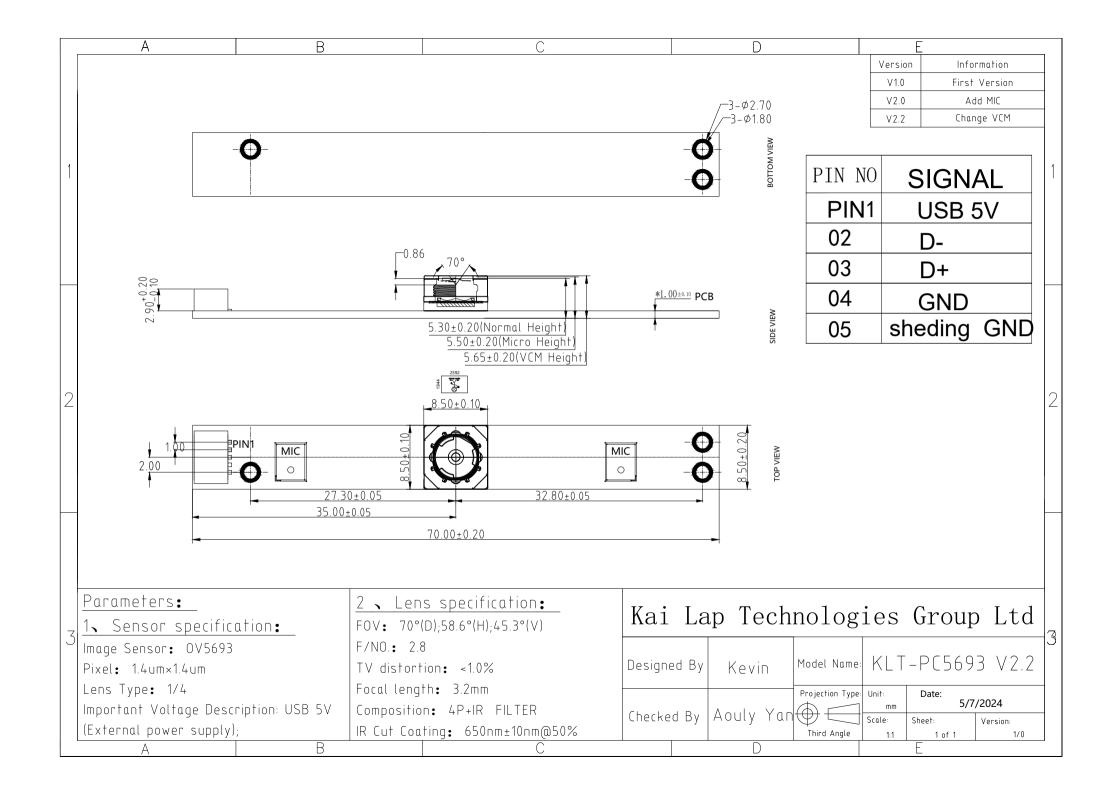



OV5693 5-megapixel product brief





available in a lead-free package

High-Performance 5-Megapixel Image Sensor for Front-Facing Cameras in Flagship Smartphones and Tablets

The OV5693 is OmniVision's highest performance 1/4-inch, 5-megapixel image sensor, delivering DSC-quality imaging and low-light performance as well as full 1080p high-definition video recording at 30 frames per second (fps). Using OmniVision's proprietary 1.4-micron OmniBSI-2™ pixel architecture, the OV5693 provides best-in-class low-light performance and image quality in a slim camera module. This makes the OV5693 an ideal camera solution for slim flagship smartphones and tablets, providing exceptional 5-megapixel "selfie" images and high-quality 1080p video.

Leveraging OmniVision's second-generation industry-leading backside illumination pixel technology, the OV5693 offers full resolution 5-megapixel images at 30 fps, an integrated scaler, and 2x2 binning

functionality with re-sampling filter. The scaler enables electronic image stabilization, while maintaining full field-of-view in both 720p and 1080p HD video modes. The 2x2 binning functionality, which features a post-binning re-sampling filter, further increases the sensor's sensitivity, while minimizing spatial artifacts and removing image artifacts around edges to produce crisp, clean color images.

The sensor features a high-speed 2-lane MIPI interface running up to 900 Mbps per lane and fits into an industry standard module size of 8.5×8.5 mm with a z-height of 4.2 mm for an autofocus module.

Find out more at www.ovt.com.





Applications

- Cellular and Mobile Phones
- Digital Still Cameras (DSC)
- PC Multimedia
- 3D Cameras
- Digital Video Camcorders (DVC)

Product Features

- automatic black level calibration (ABLC) support 2x2 binning, full scalar
- programmable controls for frame rate, standard serial SCCB interface mirror and flip, cropping, windowing, and scaling
- image quality controls: lens correction and defective pixel canceling
- supports output formats: 10-bit RAW RGB (MIPI)
- supports horizontal and vertical subsampling
- supports images sizes: 5MP, EIS1080p, 1080p, 720p, VGA, QVGA
- fast mode switching
- supports 3D applications

- up to 2-lane MIPI serial output interface
- embedded 512 bytes one-time programmable (OTP) memory for part identification, etc.
- two on-chip phase lock loop (PLL)
- programmable I/O drive capability
- built-in 1.2V regulator for core
- built-in temperature sensor
- supports alternate row HDR timing

OV5693




OV05693-G06H-3A (color, chip probing, 180 µm backgrinding, reconstructed 8" wafer with good die) ■ 0V05693-G36H-3A (color, chip probing, 180 µm backgrinding, reconstructed 12" wafer with good die)

Product Specifications

- active array size: 2592 x 1944
- power supply:
 core: 1.16 1.3V (1.2V typical)
- analog: 2.6 3.0V I/O: 1.7 3.0V
- power requirements:
- active: 239 mW
- XSHUTDN: 1 µW
- temperature range:
 operating: -30°C to +70°C junction
 - temperature • stable image: 0°C to +50°C junction temperature
- output formats: 10-bit RGB RAW
- lens size: 1/4"
- lens chief ray angle: 29.7° non-linear
- input clock frequency: 6 27 MHz

- max S/N ratio: 37.1 dB
- dynamic range: 68.0 dB @ 8x gain
- maximum image transfer rate:
- 5MP: 30 fps EIS1080p: 30 fps
- -1080p: 30 fps
- sensitivity: 1000 mV/lux-sec
- scan mode: progressive
- pixel size: 1.4 µm x 1.4 µm
- dark current: 3.3 mV/sec @ 60°C junction temperature
- image area: 3673.6 µm x 2738.4 µm
- dimensions:
- **СОВ:** 5350 µm x 4800 µm
- RW: 5400 μm x 4850 μm

Functional Block Diagram

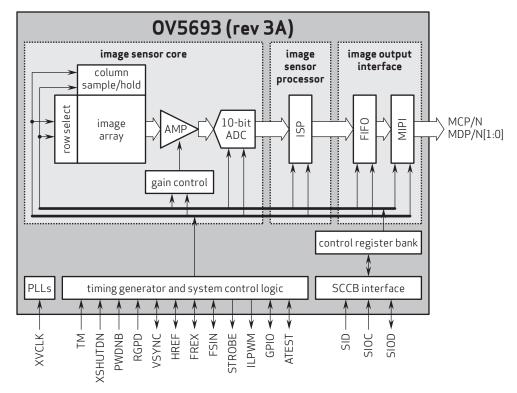

4275 Burton Drive Santa Clara, CA 95054

Tel: +1 408 567 3000 Fax: +1 408 567 3001 www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniB51-2 is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.







your BEST camera module partner

Cameras Applications








Automotive Driver Pilot

Live Streaming

Video Conference



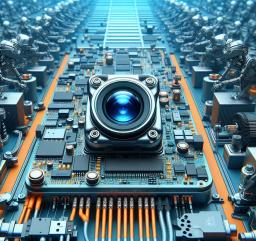




Eye Tracker Biometric Detection

Machine Vision

Agricultural Monitor

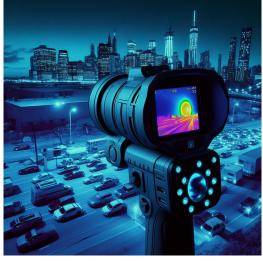





Night Vision Security

Drone and Sports Eagle Eyes

Interactive Pet Camera





Cameras Applications

your BEST camera module partner







your BEST camera module partner

Camera Module Pinout Definition Reference Chart

OmniVision Sony Samsung On-Semi Aptina Himax GalaxyCore PixArt SmartSens Sensors				
Pin Signal	Description			
DGND GND	ground for digital circuit			
AGND	ground for analog circuit			
PCLK DCK	DVP PCLK output			
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor			
MCLK XVCLK XCLK INCK	system input clock			
RESET RST	reset active low with internal pull-up resistor			
NC NULL	no connect			
SDA SIO_D SIOD	SCCB data			
SCL SIO C SIOC	SCCB input clock			
VSYNC XVS FSYNC	DVP VSYNC output			
HREF XHS	DVP HREF output			
DOVDD	power for I/O circuit			
AFVDD	power for VCM circuit			
AVDD	power for analog circuit			
DVDD	power for digital circuit			
STROBE FSTROBE	strobe output			
FSIN	synchronize the VSYNC signal from the other sensor			
SID	SCCB last bit ID input			
ILPWM	mechanical shutter output indicator			
FREX	frame exposure / mechanical shutter			
GPIO	general purpose inputs			
SLASEL	I2C slave address select			
AFEN	CEN chip enable active high on VCM driver IC			
MIPI Interface				
MDN0 DN0 MD0N DATA N DMO1N	MIPI 1st data lane negative output			
MDP0 DP0 MD0P DATA P DMO1P	MIPI 1st data lane positive output			
MDN1 DN1 MD1N DATA2 N DMO2N	MIPI 2nd data lane negative output			
MDP1 DP1 MD1P DATA2 P DMO2P	MIPI 2nd data lane positive output			
MDN2 DN2 MD2N DATA3 N DMO3N	MIPI 3rd data lane negative output			
MDP2 DP2 MD2P DATA3 P DMO3P	MIPI 3rd data lane positive output			
MDN3 DN3 MD3N DATA4 N DMO4N	MIPI 4th data lane negative output			
MDP3 DP3 MD3P DATA4 P DMO4P	MIPI 4th data lane positive output			
MCN CLKN CLK_N DCKN	MIPI clock negative output			
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output			
DVP Parallel Interface				
D0 DO0 Y0	DVP data output port 0			
D1 DO1 Y1	DVP data output port 1			
D2 DO2 Y2	DVP data output port 2			
D3 DO3 Y3	DVP data output port 3			
D4 DO4 Y4	DVP data output port 4			
D5 DO5 Y5	DVP data output port 5			
D6 DO6 Y6	DVP data output port 6			
D7 DO7 Y7	DVP data output port 7			
D8 DO8 Y8	DVP data output port 8			
D9 DO9 Y9	DVP data output port 9			
D10 DO10 Y10	DVP data output port 10			
D11 D011 Y11	DVP data output port 11			





your BEST camera module partner

Camera Reliability Test

Reliability Inspection Item		Tanting Mathad	A constant of October		
Category		Item	Testing Method	Acceptance Criteria	
	Storage	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation	
	Temperature	Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation	
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation	
Environmental		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation	
Environmental	Humidity	60°C 80% 24 Hours Temperature Chamber		No Abnormal Situation	
	Thermal Shock High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours		Temperature Chamber	No Abnormal Situation	
	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional	
Physical		With Package 60cm	10 Times on Wood Floor	Electrically Functional	
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional	
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional	
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional	
	Cable Tensile Strength Test Loading Weight 4 kg 60 Seconds Cycling in 24 Hours		Tensile Testing Machine	Electrically Functional	
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional	
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional	
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional	
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional	













Camera Inspection Standard

your BEST camera module partner

Inspection Item					
Category		Item	Inspection Method	Standard of Inspection	
		Color	The Naked Eye	Major Difference is Not Allowed.	
	FPC/ PCB	Be Torn/Chopped	The Naked Eye	Copper Crack Exposure is Not Allowed.	
	-	Marking	The Naked Eye	Clear, Recognizable (Within 30cm Distance)	
		Scratches	The Naked Eye	The Inside Crack Exposure is Not Allowed	
		Gap	The Naked Eye	Meet the Height Standard	
Appearance	Holder	Screw	The Naked Eye	Make Sure Screws Are Presented (If Any)	
		Damage	The Naked Eye	The Inside Crack Exposure is Not Allowed	
		Scratch	The Naked Eye	No Effect On Resolution Standard	
	Long	Contamination	The Naked Eye	No Effect On Resolution Standard	
	Lens	Oil Film	The Naked Eye	No Effect On Resolution Standard	
		Cover Tape	The Naked Eye	No Issue On Appearance.	
		No Communication	Test Board	Not Allowed	
		Bright Pixel	Black Board	Not Allowed In the Image Center	
		Dark Pixel	White board	Not Allowed In the Image Center	
		Blurry	The Naked Eye	Not Allowed	
		No Image	The Naked Eye	Not Allowed	
		Vertical Line	The Naked Eye	Not Allowed	
		Horizontal Line	The Naked Eye	Not Allowed	
Function	Image	Light Leakage	The Naked Eye	Not Allowed	
		Blinking Image	The Naked Eye	Not Allowed	
		Bruise	Inspection Jig	Not Allowed	
		Resolution	Chart	Follows Outgoing Inspection Chart Standard	
		Color	The Naked Eye	No Issue	
		Noise	The Naked Eye	Not Allowed	
		Corner Dark	The Naked Eye	Less Than 100px By 100px	
		Color Resolution	The Naked Eye	No Issue	
Dimension		Height	The Naked Eye	Follows Approval Data Sheet	
		Width	The Naked Eye	Follows Approval Data Sheet	
Dilliel	131011	Length	The Naked Eye	Follows Approval Data Sheet	
		Overall	The Naked Eye	Follows Approval Data Sheet	






your BEST camera module partner

KLT Package Solutions

KLT Camera Module

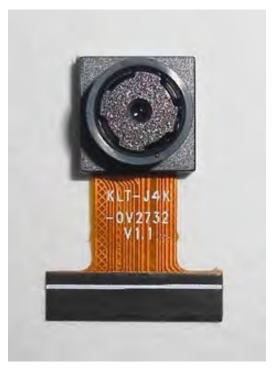


Tray with Grid and Space



Complete with Lens Protection Film



Place Cameras on the Tray

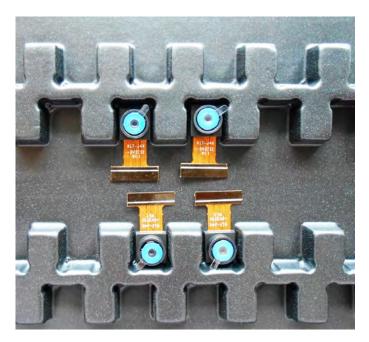





your BEST camera module partner

Camera Modules Package Solution

Full Tray of Cameras




Put Tray into Anti-Static Bag



Cover Tray with Lid



Vacuum the Anti-Static Bag

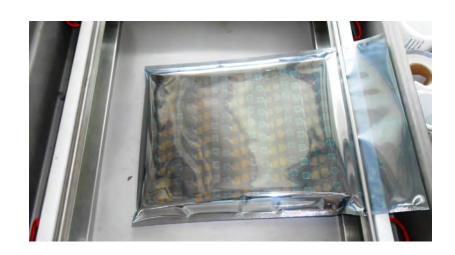





your BEST camera module partner

Camera Modules Package Solution

Sealed Vacuum Bag with Labels 1. Model and Description 2. Quantity 3. Shipping Date 4. Caution







your BEST camera module partner

Large Order Package Solution

Place Foam Sheets Between Trays

Foam Sheets are Slightly Larger than Trays





Place Foam Sheets and Trays into Box

Foam Sheets are Tightly Fitting Box









your BEST camera module partner

Small Order Package Solution

Place Foam Sheets and Trays into Small Box

Foam Sheets are Nicely Fitting the Small Box





Package in Small Box for Shipment

Place Small Boxes into Larger Box









your BEST camera module partner

Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box





Carbon Box Ready for Shipment 1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution








your BEST camera module partner

Sample Order Package Solution

Place Sample into Small Anti-Static Bag









Sample Labels on the Small Bag 1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution







your BEST camera module partner

Connectors Large Order Package Solution

Connectors in a Wheel







The Wheel is Perfectly Fitting the Box

Connectors Box Ready for Shipment









your BEST camera module partner

Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.





Limited Warranty

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequential events.

















your BEST camera module partner

KLT Strength

Powerful Factory





Professional Service







Promised Delivery











