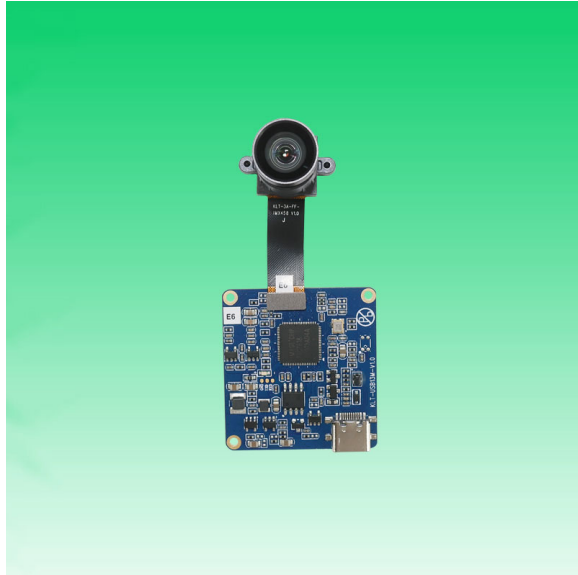


KLT-USB3A-FF-IMX458 V1.0**13MP Sony IMX458 M12 Fixed Focus USB 2.0 Camera Module**

KLT-USB3A-FF-IMX458 V1.0 is a 13MP Fixed Focus USB camera module based on 1/3.06" IMX458 image sensor. It delivers high-speed, 4K resolution ultra sharp image.

The compact size lens holder enables fitting in small mobile devices. This camera module is ideal solution for face recognition, identity detection, access control.

Key Features

- 4K resolution (4224 x 3136) Sony IMX458 sensor
- High speed USB 2.0 Plug and Play
- MJPG output format
- Low power consumption
- Compact size
- UVC compliant to Windows, Linux, OS with UVC driver
- USB OTG (On-The-Go) support

KLT-USB3A-FF-IMX458 V1.0**13MP Sony IMX458 M12 Fixed Focus USB 2.0 Camera Module**

Camera Module No.	KLT-USB3A-FF-IMX458 V1.0
Resolution	13MP
Image Sensor	IMX458
Sensor Type	1/3.06"
Pixel Size	1.12 μ m x 1.12 μ m
EFL	3.24 mm
F.NO	2.70
Pixel	4224 x 3136
View Angle	83.2°(DFOV) 71.0°(HFOV) 55.8°(VFOV)
Lens Dimensions	13.70 x 13.70 x 23.32 mm
Module Type	Fixed Focus
Interface	USB 2.0
Output Format	MJPEG / YUV2
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure
Audio	Optional
Input Voltage	DC 5V
Working Current	Max 500mA
PCB Size	80.00 x 10.00 x 8.06 mm
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
USB Cable	USB Cable

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi



KLT-USB3A-FF-IMX458 V1.0**13MP Sony IMX458 M12 Fixed Focus USB 2.0 Camera Module**

Top View



Side View



Bottom View



Mating Connector

KLT-USB3A-FF-IMX458 V1.0**13MP Sony IMX458 M12 Fixed Focus USB 2.0 Camera Module**

FORMAT	RESOLUTION	FRAME RATE
		USB 2.0
MJPG	320 x 240	25 FPS
	640 x 480 (VGA)	25 FPS
	800 x 600	25 FPS
	1024 x 768	25 FPS
	1280 x 720 (720P)	25 FPS
	1600 x 1200	25 FPS
	1920 x 1080 (1080P)	25 FPS
	2592 x 1944 (5MP)	15 FPS
	3264 x 2448 (8MP)	15 FPS
	3840 x 2160	20 FPS
	4192 x 3104	10 FPS






CMOS CAMERA MODULES



your BEST camera module partner

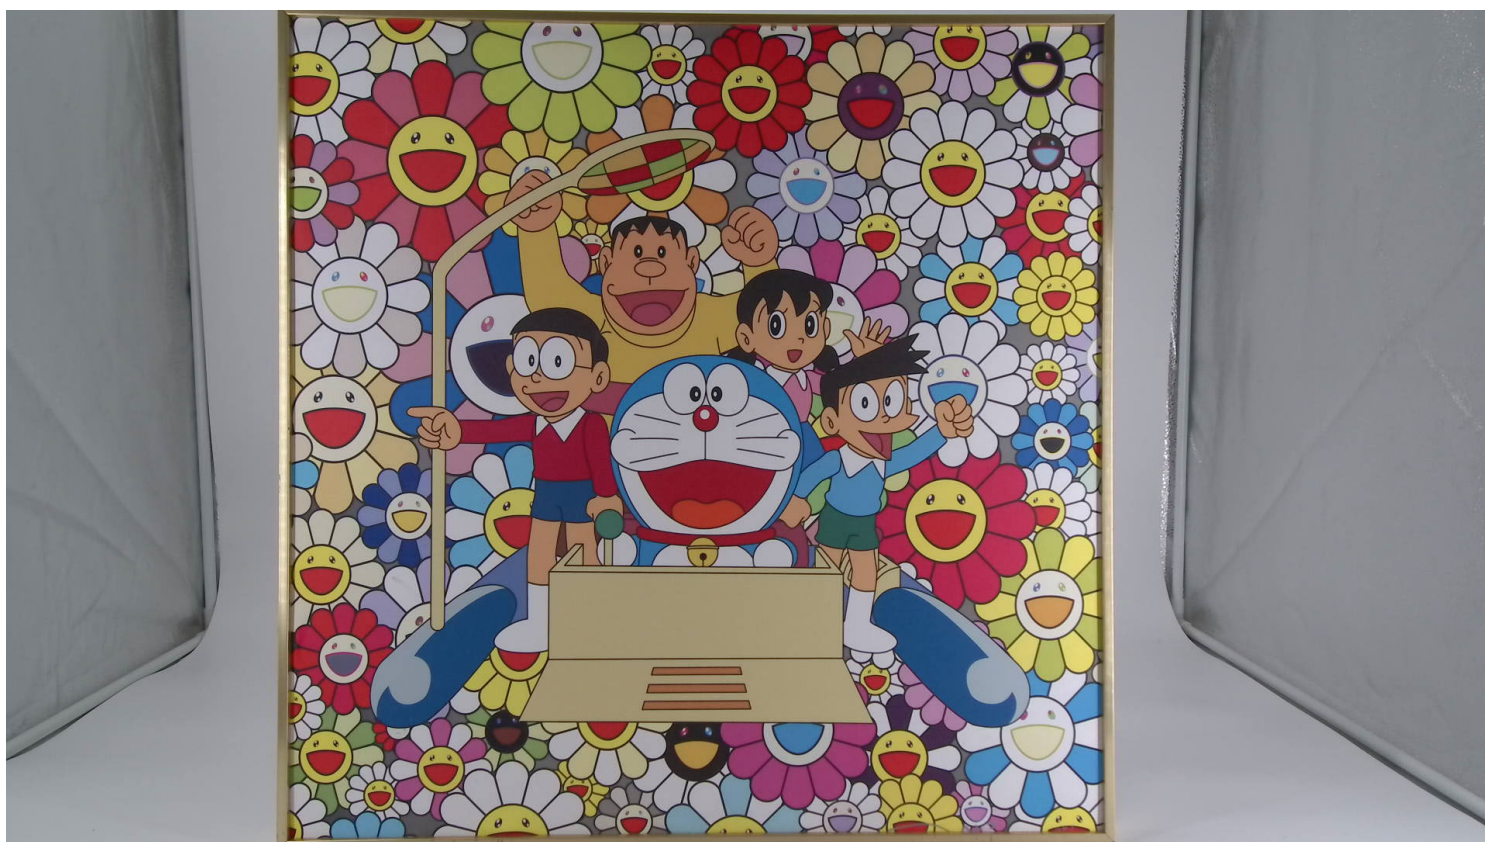

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778


All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES



your BEST camera module partner

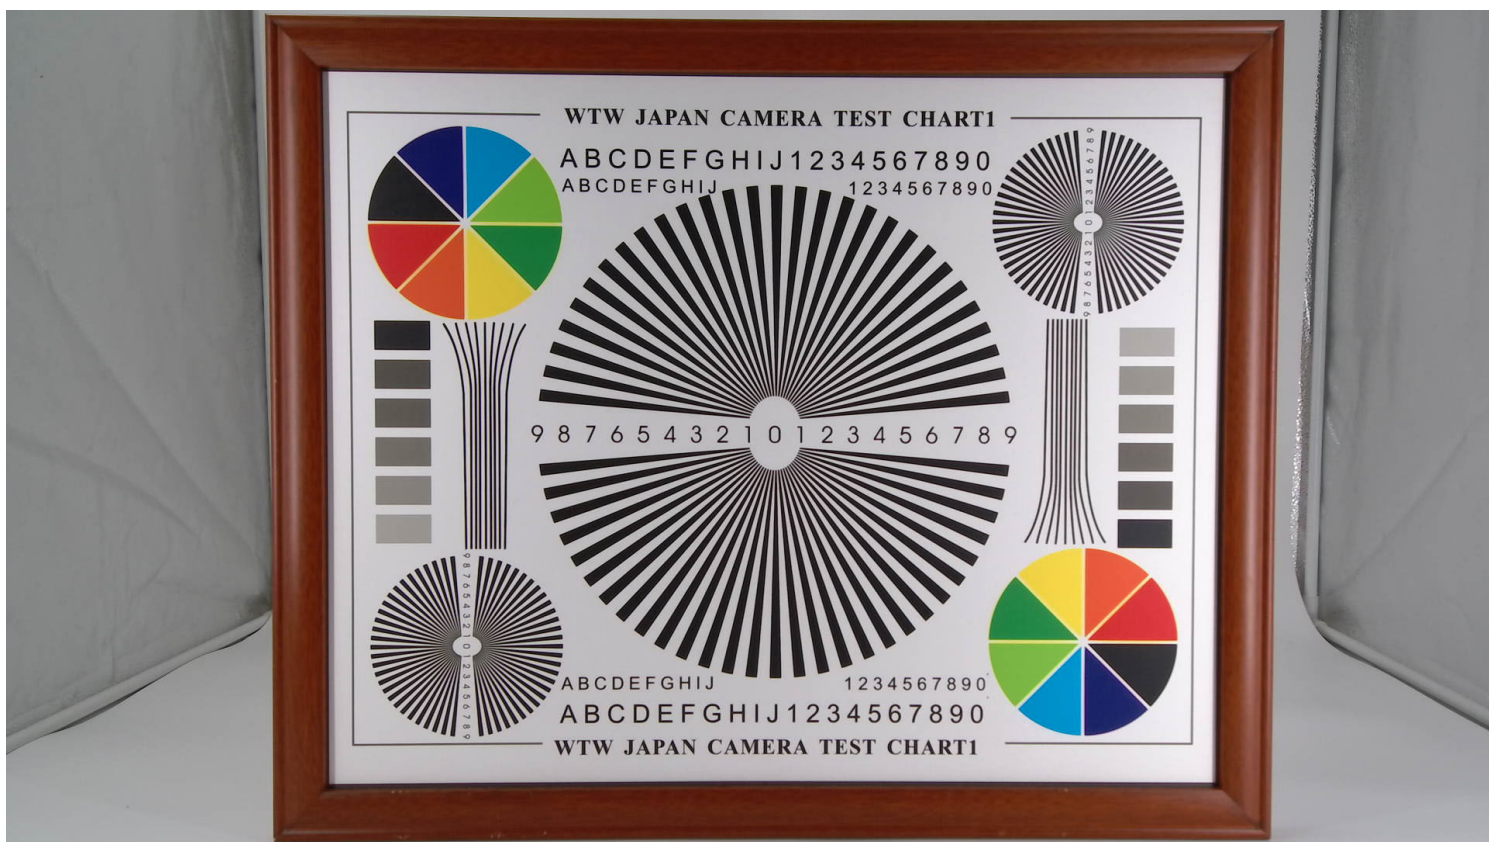

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

GROUP

1 1,008
H
Hydrogen

Periodic table of Elements

2 4,002
He
Helium

Hydrogen (Gas)

Other Metals

Noble Gases

Average Atomic Mass

Alkali Metals

Metalloids

Lanthanides

Atomic Number

Alkaline Earth Metals

Non-metals

Actinides

Name

Symbol

Transition Metals

Halogens

5 10,81 B Boron	6 12,01 C Carbon	7 14,01 N Nitrogen	8 15,99 O Oxygen	9 18,99 F Fluorine	10 20,18 Ne Neon
13 26,98 Al Aluminum	14 28,08 Si Silicon	15 30,97 P Phosphorus	16 32,07 S Sulfur	17 35,45 Cl Chlorine	18 39,95 Ar Argon

PERIOD




19 39,09 K Potassium	20 40,08 Ca Calcium	21 44,95 Sc Scandium	22 47,87 Ti Titanium	23 50,94 V Vanadium	24 51,99 Cr Chromium	25 54,94 Mn Manganese	26 55,85 Fe Iron	27 58,93 Co Cobalt	28 58,69 Ni Nickel	29 63,55 Cu Copper	30 65,39 Zn Zinc	31 69,72 Ga Gallium	32 72,61 Ge Germanium	33 74,92 As Arsenic	34 78,96 Se Selenium	35 79,90 Br Bromine	36 83,80 Kr Krypton
37 85,47 Rb Rubidium	38 87,62 Sr Strontium	39 88,91 Y Yttrium	40 91,22 Zr Zirconium	41 92,91 Nb Niobium	42 95,94 Mo Molybdenum	43 97 Tc Technetium	44 101,1 Ru Ruthenium	45 102,9 Rh Rhodium	46 106,4 Pd Palladium	47 107,9 Ag Silver	48 112,4 Cd Cadmium	49 114,8 In Indium	50 118,7 Sn Tin	51 121,8 Sb Antimony	52 127,6 Te Tellurium	53 126,9 I Iodine	54 131,3 Xe Xenon
55 132,9 Cs Caesium	56 137,3 Ba Barium	57-71 La Lanthanides	72 178,5 Hf Hafnium	73 180,9 Ta Tantalum	74 183,8 W Tungsten	75 186,2 Re Rhenium	76 190,2 Os Osmium	77 192,2 Ir Iridium	78 195,1 Pt Platinum	79 196,9 Au Gold	80 200,6 Hg Mercury	81 204,4 Tl Thallium	82 207,2 Pb Lead	83 208,9 Bi Bismuth	84 (210) Po Polonium	85 (210) At Astatine	86 (222) Rn Radon
87 (223) Fr Francium	88 (226) Ra Radium	89-103 Ac Actinides	104 (261) Rf Rutherfordium	105 (262) Db Dubnium	106 (263) Sg Seaborgium	107 (264) Bh Bohrium	108 (265) Hs Hassium	109 (268) Mt Meitnerium	110 (281) Ds Darmstadtium	111 (280) Rg Roentgenium	112 (285) Cn Copernicium	113 (284) Nh Nihonium	114 (289) Fl Flerovium	115 (288) Mc Moscovium	116 (292) Lv Livermorium	117 (294) Ts Tennessine	118 (294) Og Oganesson

57 138,9 La Lanthanum	58 140,1 Ce Cerium	59 140,9 Pr Praseodymium	60 144,2 Nd Neodymium	61 145 Pm Promethium	62 150,4 Sm Samarium	63 151,9 Eu Europium	64 157,2 Gd Gadolinium	65 158,9 Tb Terbium	66 162,5 Dy Dysprosium	67 164,9 Ho Holmium	68 167,2 Er Erbium	69 168,9 Tm Thulium	70 173 Yb Ytterbium	71 174,9 Lu Lutetium
89 (232) Ac Actinium	90 (232) Th Thorium	91 (231) Pa Protactinium	92 (238) U Uranium	93 (239) Np Neptunium	94 (239) Pu Plutonium	95 (243) Am Americium	96 (247) Cm Curium	97 (252) Bk Berkelium	98 (251) Cf Californium	99 (252) Es Einsteinium	100 (257) Fm Fermium	101 (258) Md Mendelevium	102 (259) No Nobelium	103 (260) Lr Lawrencium

ROHS

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Version	Information
V1.0	First Version

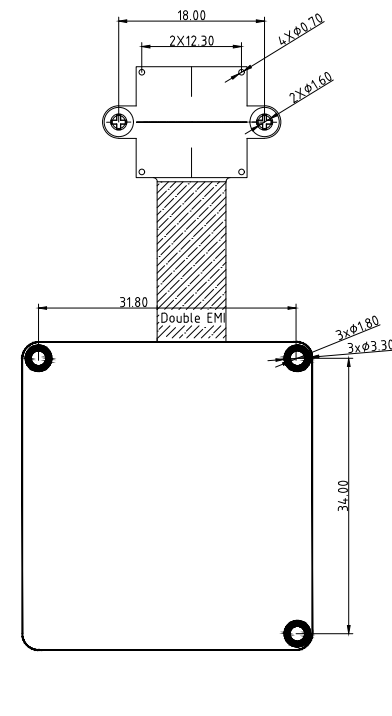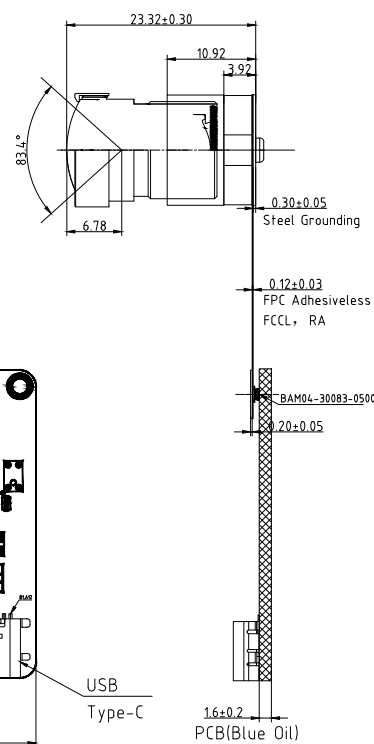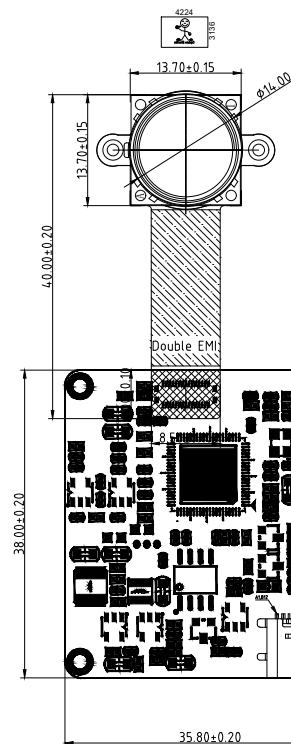

Parameters:

1、Sensor specification:

Image Sensor: IMX458

Pixel: 1.12um×1.12um

Lens Type: 1/3.06

Important Voltage Description: USB 5V

2、Lens specification:

FOV: 83.2°(D);71°(H);55.8°(V)

F/NO.: 2.7

TV distortion: <0.04%

Focal length: 3.24mm

Composition: 4G2P+IR FILTER

IR Cut Coating: 650nm±10nm@50%

Kai Lap Technologies Group Ltd

Designed By

Kevin


Model Name:

KLT-USB3A-FF-IMX458 V1.0

Checked By

Jacky

Projection Type:



Unit:

mm

Scale:

1:1

Date:

4/25/2024

Sheet:

1 of 1

Version:

1/0

[Product Information]

Ver.1.0

IMX458-AALH5

Diagonal 5.867 mm (Type 1/3.06) 13 Mega-Pixel CMOS Image Sensor with Square Pixel for Color Cameras

Description

The IMX458-AALH5 is a diagonal 5.867mm (Type 1/3.06) 13 Mega-pixel CMOS active pixel type stacked image sensor with a square pixel array. It adopts Sony's Stacked CMOS Image Sensor technology to achieve high speed image capturing by column parallel A/D converter circuits and high sensitivity and low noise image (comparing with conventional CMOS image sensor) through the backside illuminated imaging pixel structure. R, G, and B pigment primary color mosaic filter is employed. By introducing spatially multiplexed exposure technology, high dynamic range still pictures and movies are achievable. It equips an electronic shutter with variable integration time. It operates with three power supply voltages: analog 2.7 V, digital 1.2 V and 1.8 V for input/output interface and achieves low power consumption.

In addition, this product is designed for use in cellular phone and tablet pc. When using this for another application, Sony Semiconductor Solutions Corporation does not guarantee the quality and reliability of product.

In addition, individual specification change cannot be supported because this is a standard product.

Consult your Sony Semiconductor Solutions Corporation sales representative if you have any questions.

Features

- ◆ Back-illuminated and stacked CMOS image sensor
- ◆ High Dynamic Range (HDR) mode with raw data output.
- ◆ High signal to noise ratio (SNR).
- ◆ Full resolution @30 fps (Normal / HDR), 4K2K @30 fps (Normal / HDR), 1080p @90 fps (Normal)
- ◆ Output video format of RAW10/8.
- ◆ Pixel binning readout and V sub-sampling function.
- ◆ Independent flipping and mirroring.
- ◆ CSI-2 serial data output (MIPI 2lane/4lane, Max. 1.3 Gbps/lane, D-PHY spec. ver. 1.1 compliant)
- ◆ 2-wire serial communication.
- ◆ Two PLLs for independent clock generation for pixel control and data output interface.
- ◆ Dynamic Defect Pixel Correction (DPC).
- ◆ Fast mode transition. (on the fly)
- ◆ Dual sensor synchronization operation.
- ◆ 4 k bit of OTP ROM for users.
- ◆ Built-in temperature sensor

Sony reserves the right to change products and specifications without prior notice.

Sony logo is a registered trademark of Sony Corporation.

Device Structure

◆ CMOS image sensor	
◆ Image size	Diagonal 5.867 mm (Type 1/3.06)
◆ Total number of pixels	4224 (H) × 3192 (V) approx. 13.48 M pixels
◆ Number of effective pixels	4224 (H) × 3144 (V) approx. 13.28 M pixels
◆ Number of active pixels	4208 (H) × 3120 (V) approx. 13.13 M pixels
◆ Chip size	5.990 mm (H) × 3.908 mm (V)
◆ Unit cell size	1.12 μm (H) × 1.12 μm (V)

Image Sensor Characteristics

(T_j = 60 °C)

Item		Value	Remarks
Sensitivity (F2.8)	Min.	153 LSB	1/120 s integration
Saturation signal	Min.	1023 LSB	

Basic Drive Mode

Drive mode	Number of active pixels	Maximum frame rate [frame/s]
Full resolution (Normal/HDR)	4208 (H) × 3120 (V) approx. 13.13 M pixels	30 (Normal) 40 (HDR)
2 Sub-sampling (V : 1/2)	2100 (H) × 1560 (V) approx. 3.28 M pixels	60
3 Binning (V: 1/3)	1400 (H) × 752 (V) approx. 1.05 M pixels	123

Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

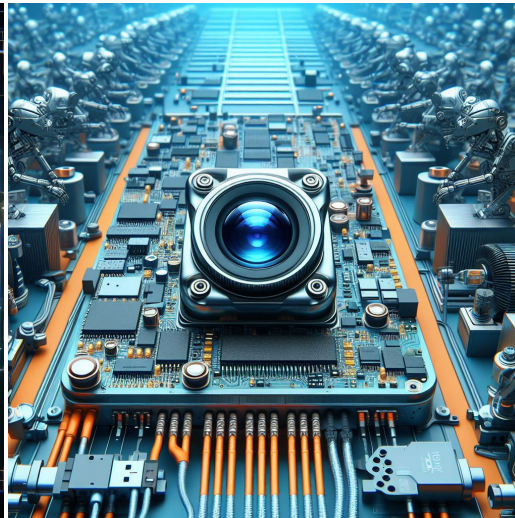

Machine Vision



Agricultural Monitor

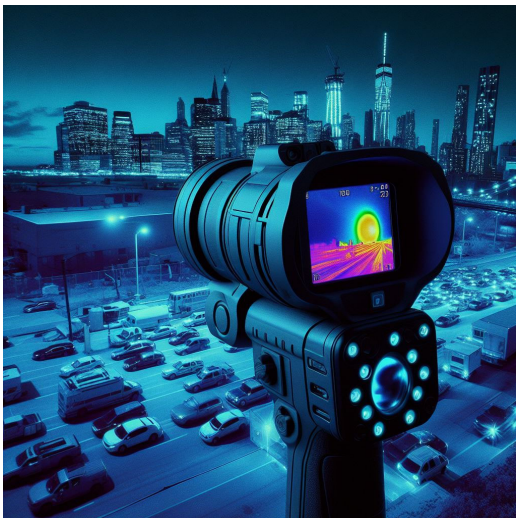

Night Vision Security



Drone and Sports Eagle Eyes



Interactive Pet Camera

Cameras Applications

your BEST camera module partner



IMAGING DEVICES



Camera Module Pinout Definition Reference Chart

OmniVision Sony Samsung On-Semi Aptina Himax GalaxyCore PixArt SmartSens Sensors	
Pin Signal	Description
DGND GND	ground for digital circuit
AGND	ground for analog circuit
PCLK DCK	DVP PCLK output
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor
MCLK XVCLK XCLK INCK	system input clock
RESET RST	reset active low with internal pull-up resistor
NC NULL	no connect
SDA SIO_D SIOD	SCCB data
SCL SIO_C SIOC	SCCB input clock
VSYNC XVS FSYNC	DVP VSYNC output
HREF XHS	DVP HREF output
DOVDD	power for I/O circuit
AFVDD	power for VCM circuit
AVDD	power for analog circuit
DVDD	power for digital circuit
STROBE FSTROBE	strobe output
FSIN	synchronize the VSYNC signal from the other sensor
SID	SCCB last bit ID input
ILPWM	mechanical shutter output indicator
FREX	frame exposure / mechanical shutter
GPIO	general purpose inputs
SLASEL	I2C slave address select
AFEN	CEN chip enable active high on VCM driver IC
MIPI Interface	
MDN0 DN0 MD0N DATA_N DMO1N	MIPI 1st data lane negative output
MDP0 DP0 MD0P DATA_P DMO1P	MIPI 1st data lane positive output
MDN1 DN1 MD1N DATA2_N DMO2N	MIPI 2nd data lane negative output
MDP1 DP1 MD1P DATA2_P DMO2P	MIPI 2nd data lane positive output
MDN2 DN2 MD2N DATA3_N DMO3N	MIPI 3rd data lane negative output
MDP2 DP2 MD2P DATA3_P DMO3P	MIPI 3rd data lane positive output
MDN3 DN3 MD3N DATA4_N DMO4N	MIPI 4th data lane negative output
MDP3 DP3 MD3P DATA4_P DMO4P	MIPI 4th data lane positive output
MCN CLKN CLK_N DCKN	MIPI clock negative output
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output
DVP Parallel Interface	
D0 DO0 Y0	DVP data output port 0
D1 DO1 Y1	DVP data output port 1
D2 DO2 Y2	DVP data output port 2
D3 DO3 Y3	DVP data output port 3
D4 DO4 Y4	DVP data output port 4
D5 DO5 Y5	DVP data output port 5
D6 DO6 Y6	DVP data output port 6
D7 DO7 Y7	DVP data output port 7
D8 DO8 Y8	DVP data output port 8
D9 DO9 Y9	DVP data output port 9
D10 DO10 Y10	DVP data output port 10
D11 DO11 Y11	DVP data output port 11

Camera Reliability Test


Reliability Inspection Item			Testing Method	Acceptance Criteria
Category		Item		
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item			Inspection Method	Standard of Inspection	
Category		Item			
Appearance	FPC/ PCB	Color	The Naked Eye	Major Difference is Not Allowed.	
		Be Torn/Chopped	The Naked Eye	Copper Crack Exposure is Not Allowed.	
		Marking	The Naked Eye	Clear, Recognizable (Within 30cm Distance)	
	Holder	Scratches	The Naked Eye	The Inside Crack Exposure is Not Allowed	
		Gap	The Naked Eye	Meet the Height Standard	
		Screw	The Naked Eye	Make Sure Screws Are Presented (If Any)	
		Damage	The Naked Eye	The Inside Crack Exposure is Not Allowed	
	Lens	Scratch	The Naked Eye	No Effect On Resolution Standard	
		Contamination	The Naked Eye	No Effect On Resolution Standard	
		Oil Film	The Naked Eye	No Effect On Resolution Standard	
		Cover Tape	The Naked Eye	No Issue On Appearance.	
	Function	Image	No Communication	Test Board	Not Allowed
			Bright Pixel	Black Board	Not Allowed In the Image Center
Dark Pixel			White board	Not Allowed In the Image Center	
Blurry			The Naked Eye	Not Allowed	
No Image			The Naked Eye	Not Allowed	
Vertical Line			The Naked Eye	Not Allowed	
Horizontal Line			The Naked Eye	Not Allowed	
Light Leakage			The Naked Eye	Not Allowed	
Blinking Image			The Naked Eye	Not Allowed	
Bruise			Inspection Jig	Not Allowed	
Resolution			Chart	Follows Outgoing Inspection Chart Standard	
Color			The Naked Eye	No Issue	
Noise			The Naked Eye	Not Allowed	
Corner Dark			The Naked Eye	Less Than 100px By 100px	
Color Resolution			The Naked Eye	No Issue	
Dimension			Height	The Naked Eye	Follows Approval Data Sheet
		Width	The Naked Eye	Follows Approval Data Sheet	
		Length	The Naked Eye	Follows Approval Data Sheet	
		Overall	The Naked Eye	Follows Approval Data Sheet	

KLT Package Solutions

KLT Camera Module

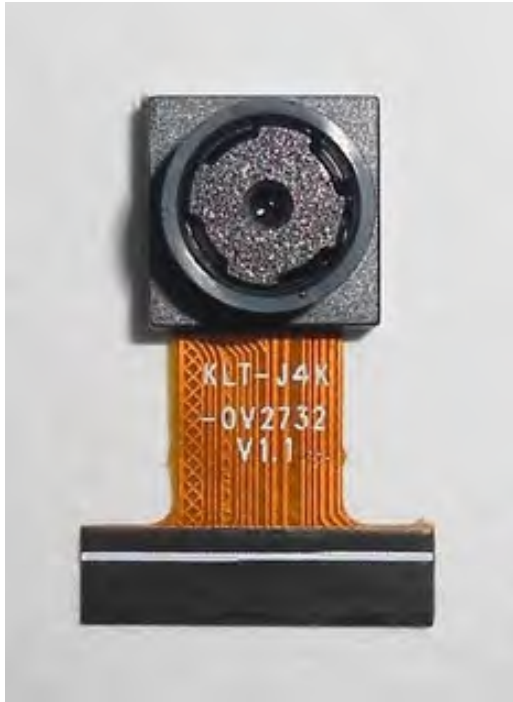

Complete with Lens Protection Film



Tray with Grid and Space




Place Cameras on the Tray



Camera Modules Package Solution

Full Tray of Cameras

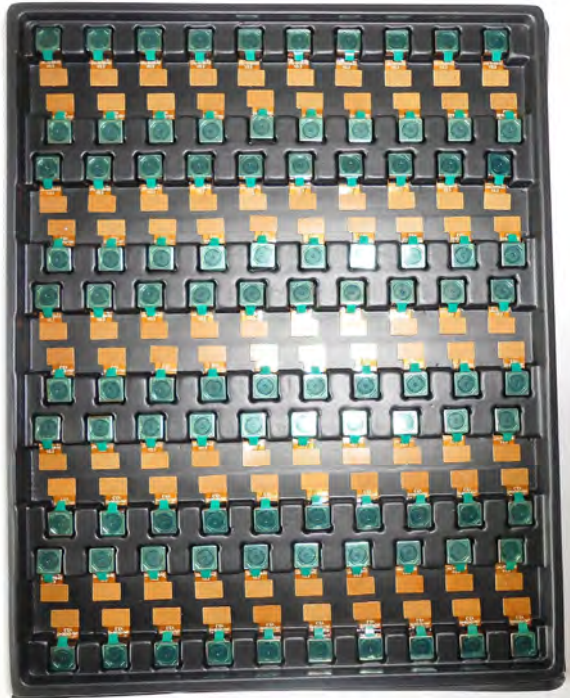


Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

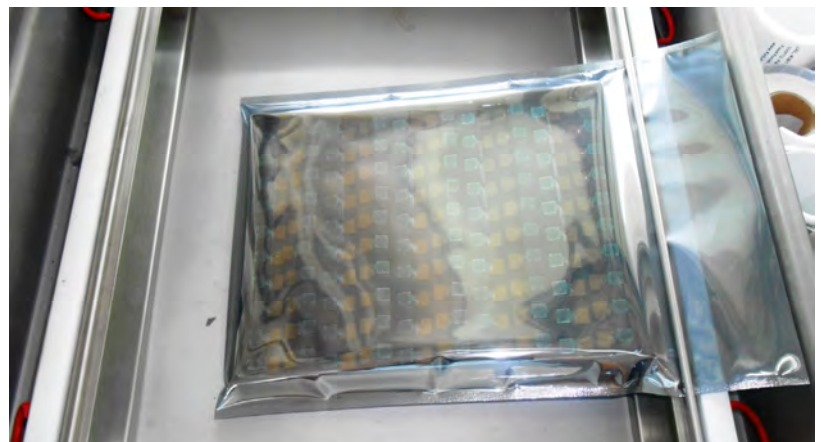

Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



Large Order Package Solution

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box



Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment



Place Small Boxes into Larger Box



Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution



Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel




The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




**Company Kai Lap Technologies (KLT)**

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

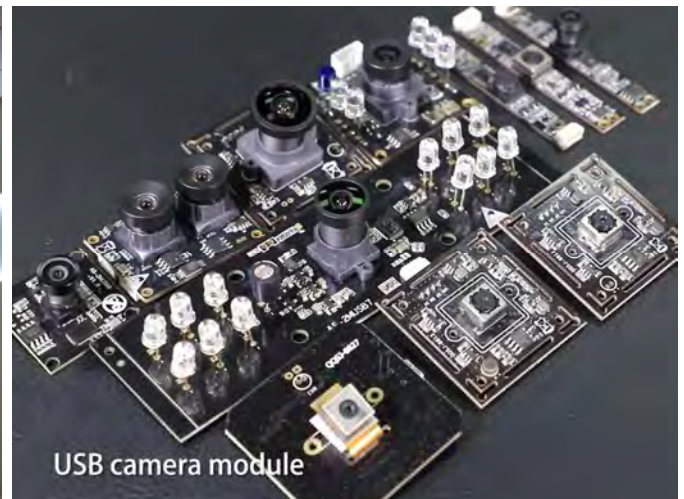**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").


For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.





CMOS CAMERA MODULES



your BEST camera module partner

KLT Strength

Powerful Factory



Professional Service



Promised Delivery



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.