


your BEST camera module partner

#### KLT-Z4MA-B-OV5640-1B V2.0

5MP OmniVision OV5640-1B MIPI Interface Auto Focus Camera Module

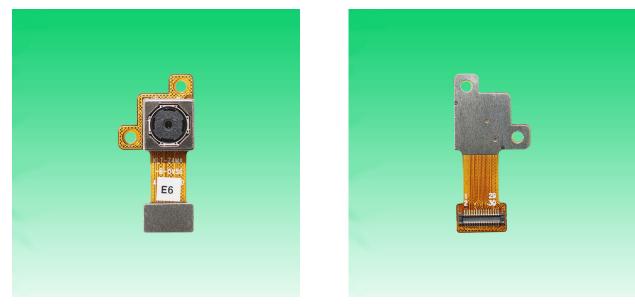

Front View

**Back View** 

#### **Specifications**

| Camera Module No.        | KLT-Z4MA-B-OV5640-1B V2.0           |  |
|--------------------------|-------------------------------------|--|
| Resolution               | 5MP                                 |  |
| Image Sensor             | OV5640-1B                           |  |
| Sensor Type              | 1/4"                                |  |
| Pixel Size               | 1.4 um x 1.4 um                     |  |
| EFL                      | 3.29 mm                             |  |
| F.NO                     | 2.80                                |  |
| Pixel                    | 2592 x 1944                         |  |
| View Angle               | 68.7°(DFOV) 58.1°(HFOV) 45.0°(VFOV) |  |
| Lens Dimensions          | 8.50 x 8.50 x 5.07 mm               |  |
| Module Size              | 26.68 x 12.70 mm                    |  |
| Module Type              | Auto Focus                          |  |
| Interface                | MIPI                                |  |
| Auto Focus VCM Driver IC | Embedded                            |  |
| Lens Type                | 650nm IR Cut                        |  |
| Operating Temperature    | -30°C to +70°C                      |  |
| Mating Connector         | AXT530124                           |  |

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

#### KLT-Z4MA-B-OV5640-1B V2.0


5MP OmniVision OV5640-1B MIPI Interface Auto Focus Camera Module



**Top View** 



Side View

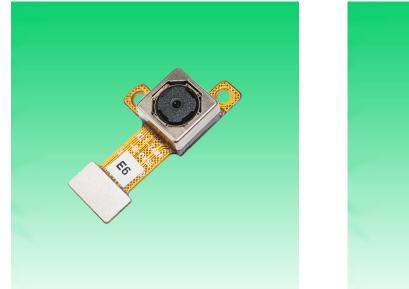






Mating Connector

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

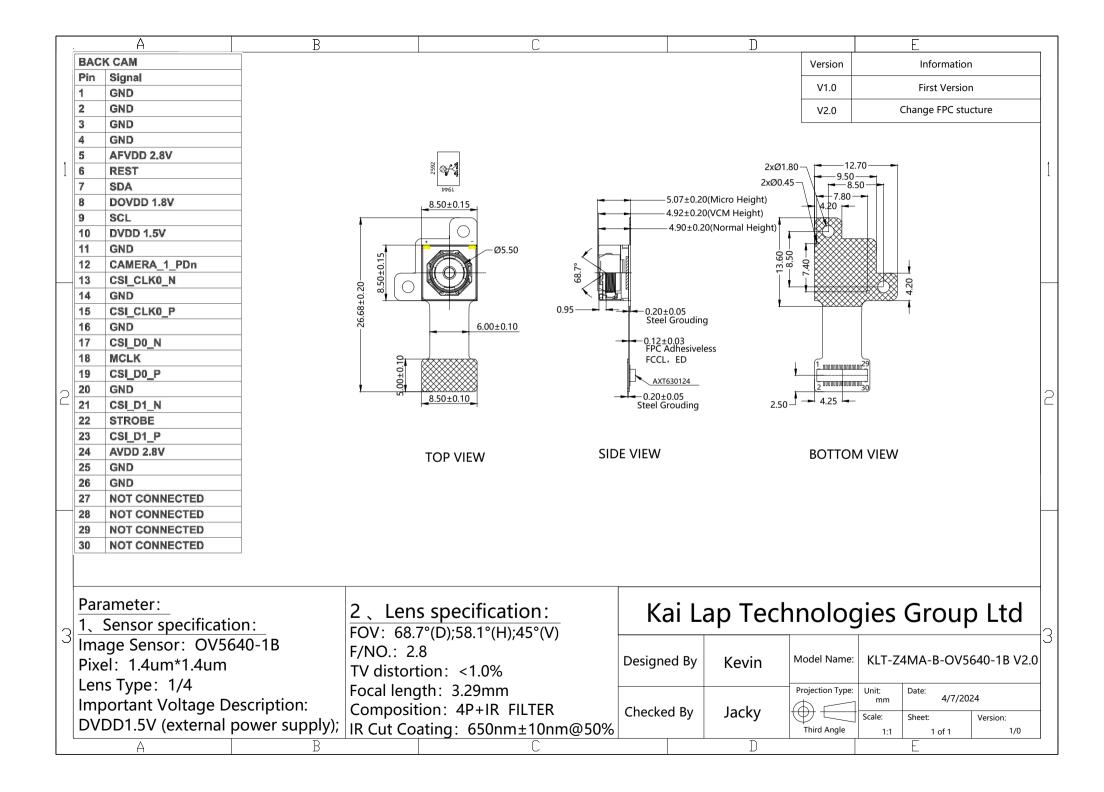

# OV5640 5-megapixel product brief





available in a lead-free package

## 1/4-inch, 5-Megapixel SOC Image Sensor Optimized for High-Volume Mobile Markets

The OV5640 delivers a complete 5-megapixel camera solution on a single chip, aimed at offering cost efficiencies that serve the highvolume autofocus (AF) camera phone market. The system-on-achip (SOC) sensor features OmniVision's 1.4 micron OmniBSI™ backside illumination architecture to deliver excellent pixel performance and best-in-class low-light sensitivity, while enabling ultra compact camera module designs of 8.5 mm x 8.5 mm with <6 mm z-height. The OV5640 provides the full functionality of a complete camera, including anti-shake technology, AF control, and MIPI while being easier to tune then two-chip solutions, making it an ideal choice in terms of cost, time-to-market and ease of platform integration.

The OV5640 enables 720p HD video at 60 frames per second (fps) and 1080p HD video at 30 fps with complete user control over formatting and output data transfer. The 720p/60 HD video is captured in full field of view (FOV) with 2 x 2 binning, which doubles the sensitivity and improves the signal-to-noise ratio (SNR). Additionally, a unique post-binning re-sampling filter function removes zigzag artifacts around slant edges and minimizes spatial artifacts to deliver even sharper, crisper

color images. To further improve camera performance and user experience, the OV5640 features an internal anti-shake engine for image stabilization, and it supports Scalado<sup>™</sup> tagging for faster image preview and zoom.

The OV5640 offers a digital video port (DVP) parallel interface and a high-speed dual lane MIPI interface, supporting multiple output formats. An integrated JPEG compression engine simplifies data transfer for bandwidth-limited interfaces. The sensor's automatic image control functions include automatic exposure control (AEC), automatic white balance (AWB), automatic band filter (ABF), 50/60 Hz automatic luminance detection, and automatic black level calibration (ABLC). The OV5640 delivers programmable controls for frame rate, AEC/AGC 16-zone size/position/weight control, mirror and flip, cropping, windowing, and panning. It also offers color saturation, hue, gamma, sharpness (edge enhancement), lens correction, defective pixel canceling, and noise canceling to improve image quality.

Find out more at www.ovt.com.



### applications

- cellular phones
- toys
- PC multimedia
- digital still cameras

#### features

- 1.4 µm x 1.4 µm pixel with OmniBSI technology for high performance (high sensitivity, low crosstalk, low noise, improved quantum efficiency)
- optical size of 1/4"
- automatic image control functions: automatic exposure control (AEC), automatic white balance (AWB), automatic band filter (ABF), automatic 50/60 Hz luminance detection, and automatic black level calibration (ABLC)
- programmable controls for frame rate, AEC/AGC 16-zone size/position/weight control, mirror and flip, cropping, windowing, and panning
- image quality controls: color saturation, hue, gamma, sharpness (edge enhancement), lens correction, defective pixel canceling, and noise canceling
- support for output formats: RAW RGB, RGB565/555/444, CCIR656, YUV422/420, YCbCr422, and compression
- support for video or snapshot operations
- support for internal and external frame synchronization for frame exposure mode

## key specifications (typical)

- active array size: 2592 x 1944
  - **power supply:** core: 1.425 ~ 1.675V (with embedded 1.5V regulator) analog: 2.6 ~ 3.0V (2.8V typical) I/O: 1.8V / 2.8V
- power requirements: active: 140 mA standby: 20 µA
- temperature range: operating: -30°C to 70°C junction temperature (see table 8-2) stable image: 0°C to 50°C junction temperature (see table 8-2)
- output formats: 8-/10-bit RGB RAW output
- lens size: 1/4"
- lens chief ray angle: 24° (see figure 10-2)

### ordering information

- OV05640-A71A-1B (color, lead-free) 71-pin CSP
- support for LED and flash strobe mode
- support for horizontal and vertical sub-sampling, binning
- support for minimizing artifacts on binned image
- support for data compression output
- support for anti-shake
- standard serial SCCB interface
- digital video port (DVP) parallel output interface and dual lane MIPI output interface
- embedded 1.5V regulator for core power
- programmable I/O drive capability, I/O tri-state configurability
- support for black sun cancellation
- support for images sizes: 5 megapixel, and any arbitrary size scaling down from 5 megapixel
- support for auto focus control (AFC) with embedded AF VCM driver
- embedded microcontroller
- suitable for module size of 8.5 x 8.5 x <6mm with both CSP and RW packaging
- input clock frequency: 6~27 MHz
- max S/N ratio: 36 dB
- dynamic range: 68 dB @ 8x gain
- maximum image transfer rate: QSXGA (2592x1944): 15 fps 1080p: 30 fps 1280x960: 45 fps 720p: 60 fps VGA (640x480): 90 fps
- sensitivity: 600 mV/Lux-sec
- shutter: rolling shutter / frame exposure
- maximum exposure interval: 1964 x t<sub>ROW</sub>
- pixel size: 1.4 µm x 1.4 µm
- dark current: 8 mV/s @ 60°C junction temperature
- image area: 3673.6 μm x 2738.4 μm
- package dimensions: 5985 µm x 5835 µm








#### NARROW-PITCH, THIN AND SLIM CONNECTOR FOR BOARD-TO-FPC CONNECTION

#### FEATURES

1. Space-saving (3.6 mm widthwise) The required space is smaller than our F4 series (40-contact type): Socket — 27% smaller, Header — 38% smaller The small size contributes to the miniaturization of target equipment.



\* Clips for preventing the solder joints from being removed


#### 2. Highly reliable **TDLIGH CONTRET** has strong resistance to adverse environments.

(See Page 6 for details of the structure) Note: If extra resistance to shock caused by dropping

is required, we recommend using our previous F4 Series.

## NARROW PITCH (0.4 mm) CONNECTORS F4S SERIES

3. The simple lock structure gives tactile feedback that ensures a superior mating/unmating operation feel.



#### 4. Gull-wing type terminals

The gull-wing type terminals facilitate automatic mounting inspections.

**5.** Connectors for inspection available Connectors for inspection are available that are ideal for modular unit inspection and inspection in device assembly processes.

#### **APPLICATIONS**

Compact portable devices "Cellular phones, DVC, Digital cameras, etc"

| Example of Board-to-FPC connections  |  |  |  |  |
|--|--|--|--|--|
| Before mating  | Reinforcing plate<br>Narrow-pitch f (with FPC)<br>connectors F4S |  |  |  |
| After<br>mating  | + 1.0mm  |  |  |  |
| The simple lock mechanism ensures that the<br>connector clicks into position when it is inserted<br>for reliable single-action insertion on the PCB. |  |  |  |  |

#### ORDERING INFORMATION

| 5: Narrow Pitch Connector F4S (0.4 mm pitch) Socket<br>6: Narrow Pitch Connector F4S (0.4 mm pitch) Header   | AXT 4    |
|--|----------|
| Number of contacts (2 digits)  |          |
| Mated height<br><socket><br/>1: For mated height 1.0 mm<br/>2: For mated height 1.2 mm<br/><header><br/>1: For mated height 1.0 mm<br/>2: For mated height 1.2 mm</header></socket>                          |          |
| Functions<br><socket, header=""><br/>2: Without positioning bosses</socket,>   |          |
| Surface treatment (Contact portion / Terminal portion)<br><socket><br/>4: Base: Ni plating Surface: Au plating (for Ni barrier av<br/><header><br/>4: Base: Ni plating Surface: Au plating</header></socket> | ailable) |

Note: Please note that models with a mated height of 1.0 mm (7th digit of part number is "1") and 1.2 mm (7th digit of part number is "2") are not compatible.

### AXT5, 6 PRODUCT TYPES TOUGH CONTRET

| Matad baight | Number of contacts | Part r    | number    | Pac          | king         |
|--------------|--------------------|-----------|-----------|--------------|--------------|
| Mated height | Number of contacts | Socket    | Header    | Inner carton | Outer carton |
| ·            | 10                 | AXT510124 | AXT610124 |              |              |
|              | 12                 | AXT512124 | AXT612124 |              |              |
|              | 14                 | AXT514124 | AXT614124 |              |              |
|              | 16                 | AXT516124 | AXT616124 |              |              |
|              | 18                 | AXT518124 | AXT618124 |              |              |
|              | 20                 | AXT520124 | AXT620124 |              |              |
|              | 22                 | AXT522124 | AXT622124 |              |              |
|              | 24                 | AXT524124 | AXT624124 |              |              |
|              | 26                 | AXT526124 | AXT626124 |              |              |
|              | 28                 | AXT528124 | AXT628124 |              |              |
|              | 30                 | AXT530124 | AXT630124 |              |              |
|              | 32                 | AXT532124 | AXT632124 |              |              |
| 1.0mm        | 34                 | AXT534124 | AXT634124 |              |              |
| 1.000        | 36                 | AXT536124 | AXT636124 |              |              |
|              | 38                 | AXT538124 | AXT638124 |              |              |
|              | 40                 | AXT540124 | AXT640124 | 3,000 pieces | 6,000 pieces |
|              | 42                 | AXT542124 | AXT642124 |              |              |
|              | 44                 | AXT544124 | AXT644124 |              |              |
|              | 46                 | AXT546124 | AXT646124 |              |              |
|              | 48                 | AXT548124 | AXT648124 |              |              |
|              | 50                 | AXT550124 | AXT650124 |              |              |
|              | 54                 | AXT554124 | AXT654124 |              |              |
|              | 60                 | AXT560124 | AXT660124 |              |              |
|              | 64                 | AXT564124 | AXT664124 |              |              |
|              | 70                 | AXT570124 | AXT670124 |              |              |
|              | 80                 | AXT580124 | AXT680124 |              |              |
| _            | 10                 | AXT510224 | AXT610224 |              |              |
|              | 30                 | AXT530224 | AXT630224 |              |              |
| 1.2mm        | 40                 | AXT540224 | AXT640224 |              |              |
|              | 50                 | AXT550224 | AXT650224 |              |              |
|              | 80                 | AXT580224 | AXT680224 |              |              |

Notes: 1. Order unit: For mass production: in 1-inner-box (1-reel) units

Samples for mounting check: in 50-connector units. Please contact our sales office.

Samples: Small lot orders are possible. Please contact our sales office.

The above part numbers are for connectors without positioning bosses, which are standard. When ordering connectors with positioning bosses, please contact our sales office.
Please contact us for connectors having a number of contacts other than those listed above.

#### SPECIFICATIONS

#### 1. Characteristics

|                                  | Item   | Specifications  | Conditions   |
|----------------------------------|--|---|--|
|                                  | Rated current  | 0.3A/contact (Max. 5 A at total contacts)   |  |
|                                  | Rated voltage  | 60V AC/DC   |  |
| Electrical characteristics       | Breakdown voltage  | 150V AC for 1 min.  | No short-circuiting or damage at a detection current of 1 mA when the specified voltage is applied for one minute.   |
| characteristics                  | Insulation resistance                                    | Min. 1,000MΩ (initial)  | Using 250V DC megger (applied for 1 min.)  |
|                                  | Contact resistance                                       | Max. 90mΩ   | Based on the contact resistance measurement method specified by JIS C 5402.  |
|                                  | Composite insertion force                                | Max. 0.981N/contacts × contacts (initial)   |  |
| Vechanical                       | Composite removal force                                  | Min. 0.165N/contacts × contacts   |  |
| characteristics                  | Contact holding force<br>(Socket contact)                | Min. 0.49N/contacts   | Measuring the maximum force.<br>As the contact is axially pull out.  |
|                                  | Ambient temperature                                      | –55°C to +85°C  | No freezing at low temperatures. No dew condensation.  |
|                                  | Soldering heat resistance                                | Peak temperature: 260°C or less (on the surface of the PC board around the connector terminals) | Infrared reflow soldering  |
|                                  |  | 300°C within 5 sec. 350°C within 3 sec.   | Soldering iron   |
|                                  | Storage temperature                                      | -55°C to +85°C (product only)<br>-40°C to +50°C (emboss packing)                                | No freezing at low temperatures. No dew condensation.  |
| Environmental<br>characteristics | Thermal shock resistance<br>(header and socket mated)    | 5 cycles, insulation resistance min. 100M $\Omega$ , contact resistance max. 90m $\Omega$       | Sequence       155.3°C, 30 minutes       2. ~, Max. 5 minutes       3. 85*3°C, 30 minutes       4. ~, Max. 5 minutes |
|                                  | Humidity resistance<br>(header and socket mated)         | 120 hours, insulation resistance min. 100M $\Omega$ , contact resistance max. 90m $\Omega$      | Bath temperature 40±2°C,<br>humidity 90 to 95% R.H.  |
|                                  | Saltwater spray resistance (header and socket mated)     | 24 hours, insulation resistance min. 100MΩ, contact resistance max. 90mΩ                        | Bath temperature 35±2°C,<br>saltwater concentration 5±1%   |
|                                  | H <sub>2</sub> S resistance<br>(header and socket mated) | 48 hours, contact resistance max. $90m\Omega$   | Bath temperature 40±2°C, gas concentration 3±1 ppm, humidity 75 to 80% R.H.  |
| Lifetime<br>characteristics      | Insertion and removal life                               | 50 times  | Repeated insertion and removal speed of max. 200 times/<br>hours   |
| Unit weight                      |  | 20-contact type: Socket: 0.03 g Header: 0.01 g  |  |

#### 2. Material and surface treatment

| Part name           | Material               | Surface treatment  |  |  |
|---------------------|------------------------|--|--|--|
| Molded<br>portion   | LCP resin<br>(UL94V-0) | —  |  |  |
| Contact and<br>Post | Copper alloy           | Contact portion: Base: Ni plating Surface: Au plating<br>Terminal portion: Base: Ni plating Surface: Au plating (except the terminal tips)<br>The socket terminals close to the portion to be soldered have nickel barriers (exposed nickel portions).<br>Metal clips: Sockets: Base: Ni plating Surface: Pd+Au flash plating (except the terminal tips)<br>Headers: Base: Ni plating Surface: Au plating (except the terminal tips) |  |  |

### AXT5, 6

#### **DIMENSIONS** (Unit: mm) The CAD data of the products with a CAD Data mark can be downloaded from: http://panasonic-electric-works.net/ac Socket (Mated height: 1.0 mm and 1.2 mm) table (mm)

1.2mm

1.17

0.83


1.01

1.2mm

|                        | Dimension table (m                 |
|------------------------|------------------------------------|
| CAD Data               | 8 Number of contacts/<br>dimension |
|                        | 28                                 |
|                        | 30                                 |
| []                     | 32                                 |
| L <del></del>          | 34                                 |
|                        | 36                                 |
|                        | 38                                 |
| Y note                 | 40                                 |
|                        | 42                                 |
|                        | 44                                 |
|                        | 46                                 |
|                        | e: ±0.2 48                         |
|                        | 50                                 |
|                        | 54                                 |
| A CTU. I Mated height/ | D 60                               |
| dimension              | 64                                 |
| 1.0mm 0                | 0.97 70                            |

Note: Since the clip (soldering terminal)\* has a single-piece construction, sections Y and Z are electrically connected.

#### Header (Mated height: 1.0 mm and 1.2 mm)

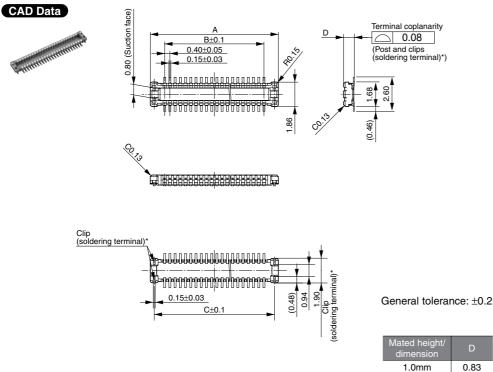

#### Dimension table (mm)

80

| Number of contacts/<br>dimension | А    | В    | С    |
|----------------------------------|------|------|------|
| 10                               | 3.8  | 1.6  | 3.2  |
| 12                               | 4.2  | 2.0  | 3.6  |
| 14                               | 4.6  | 2.4  | 4.0  |
| 16                               | 5.0  | 2.8  | 4.4  |
| 18                               | 5.4  | 3.2  | 4.8  |
| 20                               | 5.8  | 3.6  | 5.2  |
| 22                               | 6.2  | 4.0  | 5.6  |
| 24                               | 6.6  | 4.4  | 6.0  |
| 26                               | 7.0  | 4.8  | 6.4  |
| 28                               | 7.4  | 5.2  | 6.8  |
| 30                               | 7.8  | 5.6  | 7.2  |
| 32                               | 8.2  | 6.0  | 7.6  |
| 34                               | 8.6  | 6.4  | 8.0  |
| 36                               | 9.0  | 6.8  | 8.4  |
| 38                               | 9.4  | 7.2  | 8.8  |
| 40                               | 9.8  | 7.6  | 9.2  |
| 42                               | 10.2 | 8.0  | 9.6  |
| 44                               | 10.6 | 8.4  | 10.0 |
| 46                               | 11.0 | 8.8  | 10.4 |
| 48                               | 11.4 | 9.2  | 10.8 |
| 50                               | 11.8 | 9.6  | 11.2 |
| 54                               | 12.6 | 10.4 | 12.0 |
| 60                               | 13.8 | 11.6 | 13.2 |
| 64                               | 14.6 | 12.4 | 14.0 |
| 70                               | 15.8 | 13.6 | 15.2 |
| 80                               | 17.8 | 15.6 | 17.2 |

4.5

4.9

5.3

5.7

6.1

6.5

6.9

7.3

77

8.1

8.5

8.9

9.3

9.7

10.1

10.5

10.9

11.3

11.7

12.1

12.5

13.3

14.5

15.3

16.5

18.5

1.6

2.0

2.4

2.8

3.2

3.6

4.0

4.4

4.8

5.2

5.6

6.0

6.4

6.8

7.2

7.6

8.0

8.4

8.8

9.2

9.6

10.4

11.6

12.4

13.6

15.6

3.4

3.8

4.2

4.6

5.0

5.4

5.8

6.2

6.6

7.0

7.4

7.8

8.2

8.6

9.0

9.4

9.8

10.2

10.6

11.0

11.4

12.2

13.4

14.2

15.4

17.4

#### · Socket and Header are mated





Mated height: 1.0 mm

Mated height: 1.2 mm



#### your BEST camera module partner


#### **Cameras Applications**







Video Conference

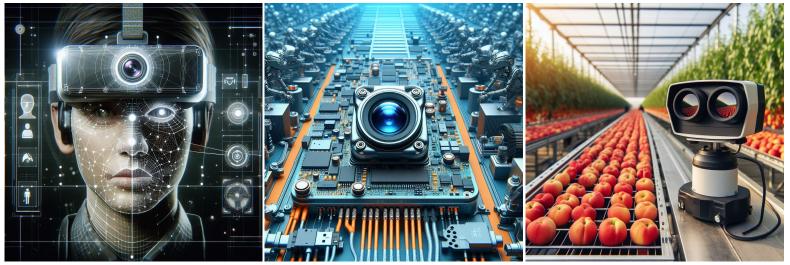

Live Streaming

Eye Tracker Biometric Detection

Machine Vision

Agricultural Monitor



Night Vision Security

Drone and Sports Eagle Eyes



Interactive Pet Camera

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



#### **Cameras Applications**

#### your BEST camera module partner



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

#### **Camera Module Pinout Definition Reference Chart**

|                             | ptina Himax GalaxyCore PixArt SmartSens Sensor          |  |  |
|-----------------------------|---|--|--|
| Pin Signal                  | Description   |  |  |
| DGND GND                    | ground for digital circuit                              |  |  |
| AGND                        | ground for analog circuit                               |  |  |
| PCLK DCK                    | DVP PCLK output   |  |  |
| XCLR PWDN XSHUTDOWN STANDBY | power down active high with internal pull-down resistor |  |  |
| MCLK XVCLK XCLK INCK        | system input clock                                      |  |  |
| RESET RST                   | reset active low with internal pull-up resistor         |  |  |
| NC NULL                     | no connect  |  |  |
| SDA SIO_D SIOD              | SCCB data   |  |  |
| SCL SIO_C SIOC              | SCCB input clock  |  |  |
| VSYNC XVS FSYNC             | DVP VSYNC output  |  |  |
| HREF XHS                    | DVP HREF output   |  |  |
| DOVDD                       | power for I/O circuit                                   |  |  |
| AFVDD                       | power for VCM circuit                                   |  |  |
| AVDD                        | power for analog circuit                                |  |  |
| DVDD                        | power for digital circuit                               |  |  |
| STROBE FSTROBE              | strobe output   |  |  |
| FSIN                        | synchronize the VSYNC signal from the other sensor      |  |  |
| SID                         | SCCB last bit ID input                                  |  |  |
| ILPWM                       | mechanical shutter output indicator                     |  |  |
| FREX                        | frame exposure / mechanical shutter                     |  |  |
| GPIO                        | general purpose inputs                                  |  |  |
| SLASEL                      | I2C slave address select                                |  |  |
| AFEN                        | CEN chip enable active high on VCM driver IC            |  |  |
| MIPI Interface              |   |  |  |
| MDN0 DN0 MD0N DATA N DMO1N  | MIPI 1st data lane negative output                      |  |  |
| MDP0 DP0 MD0P DATA P DMO1P  | MIPI 1st data lane positive output                      |  |  |
| MDN1 DN1 MD1N DATA2 N DMO2N | MIPI 2nd data lane negative output                      |  |  |
| MDP1 DP1 MD1P DATA2 P DMO2P | MIPI 2nd data lane positive output                      |  |  |
| MDN2 DN2 MD2N DATA3 N DMO3N | MIPI 3rd data lane negative output                      |  |  |
| MDP2 DP2 MD2P DATA3 P DMO3P | MIPI 3rd data lane positive output                      |  |  |
| MDN3 DN3 MD3N DATA4 N DMO4N | MIPI 4th data lane negative output                      |  |  |
| MDP3 DP3 MD3P DATA4 P DMO4P | MIPI 4th data lane positive output                      |  |  |
| MCN CLKN CLK_N DCKN         | MIPI clock negative output                              |  |  |
| MCP CLKP MCP CLK P DCKN     | MIPI clock positive output                              |  |  |
| DVP Parallel Interface      |   |  |  |
| D0 D00 Y0                   | DVP data output port 0                                  |  |  |
| D1 D01 Y1                   | DVP data output port 1                                  |  |  |
| D2 D02 Y2                   | DVP data output port 2                                  |  |  |
| D3 D03 Y3                   | DVP data output port 3                                  |  |  |
| D4 D04 Y4                   | DVP data output port 4                                  |  |  |
| D5 D05 Y5                   | DVP data output port 5                                  |  |  |
| D6 D06 Y6                   | DVP data output port 6                                  |  |  |
| D7 D07 Y7                   | DVP data output port 7                                  |  |  |
| D8 D08 Y8                   | DVP data output port 8                                  |  |  |
| D9 D09 Y9                   | DVP data output port 9                                  |  |  |
| D10 D010 Y10                | DVP data output port 10                                 |  |  |
| D11 D011 Y11                | DVP data output port 11                                 |  |  |
|                             |   |  |  |

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

#### **Camera Reliability Test**

| Reliability Inspection Item |                                |   | Ta atia a Matha d       | Accestone Oritoria      |  |
|-----------------------------|--------------------------------|---|-------------------------|-------------------------|--|
| Category                    |                                | Item  | Testing Method          | Acceptance Criteria     |  |
|                             | Storage                        | High 60°C 96 Hours  | Temperature Chamber     | No Abnormal Situation   |  |
|                             | Temperature                    | Low -20°C 96 Hours  | Temperature Chamber     | No Abnormal Situation   |  |
|                             | Operation                      | High 60°C 24 Hours  | Temperature Chamber     | No Abnormal Situation   |  |
| Environmental               | Temperature                    | Low -20°C 24 Hours  | Temperature Chamber     | No Abnormal Situation   |  |
| Environmentar               | Humidity                       | 60°C 80% 24 Hours   | Temperature Chamber     | No Abnormal Situation   |  |
|                             | Thermal Shock                  | High 60°C 0.5 Hours<br>Low -20°C 0.5 Hours<br>Cycling in 24 Hours | Temperature Chamber     | No Abnormal Situation   |  |
|                             | Drop Test<br>(Free Falling)    | Without Package 60cm  | 10 Times on Wood Floor  | Electrically Functional |  |
|                             |                                | With Package 60cm   | 10 Times on Wood Floor  | Electrically Functional |  |
|                             | Vibration Test                 | 50Hz X-Axis 2mm 30min   | Vibration Table         | Electrically Functional |  |
| Dhysiaal                    |                                | 50Hz Y-Axis 2mm 30min   | Vibration Table         | Electrically Functional |  |
| Physical                    |                                | 50Hz Z-Axis 2mm 30min   | Vibration Table         | Electrically Functional |  |
|                             | Cable Tensile<br>Strength Test | Loading Weight 4 kg<br>60 Seconds<br>Cycling in 24 Hours          | Tensile Testing Machine | Electrically Functional |  |
|                             |                                | Contact Discharge 2 KV  | ESD Testing Machine     | Electrically Functional |  |
|                             | ESD Test                       | Air Discharge 4 KV  | ESD Testing Machine     | Electrically Functional |  |
| Electrical                  | Aging Test                     | On/Off 30 Seconds<br>Cycling in 24 Hours                          | Power Switch            | Electrically Functional |  |
|                             | USB Connector                  | On/Off 250 Times  | Plug and Unplug         | Electrically Functional |  |



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

#### **Camera Inspection Standard**

г

#### your BEST camera module partner

| Inspection Item |          | Inspection Method | Standard of Inspection |  |
|-----------------|----------|-------------------|------------------------|--|
| Category        |          | ltem              | inspection method      |  |
|                 |          | Color             | The Naked Eye          | Major Difference is Not Allowed.           |
|                 | FPC/ PCB | Be Torn/Chopped   | The Naked Eye          | Copper Crack Exposure is Not Allowed.      |
|                 |          | Marking           | The Naked Eye          | Clear, Recognizable (Within 30cm Distance) |
|                 |          | Scratches         | The Naked Eye          | The Inside Crack Exposure is Not Allowed   |
|                 | Holder   | Gap               | The Naked Eye          | Meet the Height Standard                   |
| Appearance      | TIOIGEI  | Screw             | The Naked Eye          | Make Sure Screws Are Presented (If Any)    |
|                 |          | Damage            | The Naked Eye          | The Inside Crack Exposure is Not Allowed   |
|                 |          | Scratch           | The Naked Eye          | No Effect On Resolution Standard           |
|                 | Long     | Contamination     | The Naked Eye          | No Effect On Resolution Standard           |
|                 | Lens     | Oil Film          | The Naked Eye          | No Effect On Resolution Standard           |
|                 |          | Cover Tape        | The Naked Eye          | No Issue On Appearance.                    |
|                 |          | No Communication  | Test Board             | Not Allowed                                |
|                 |          | Bright Pixel      | Black Board            | Not Allowed In the Image Center            |
|                 |          | Dark Pixel        | White board            | Not Allowed In the Image Center            |
|                 |          | Blurry            | The Naked Eye          | Not Allowed                                |
|                 |          | No Image          | The Naked Eye          | Not Allowed                                |
|                 |          | Vertical Line     | The Naked Eye          | Not Allowed                                |
|                 |          | Horizontal Line   | The Naked Eye          | Not Allowed                                |
| Function        | Image    | Light Leakage     | The Naked Eye          | Not Allowed                                |
|                 |          | Blinking Image    | The Naked Eye          | Not Allowed                                |
|                 |          | Bruise            | Inspection Jig         | Not Allowed                                |
|                 |          | Resolution        | Chart                  | Follows Outgoing Inspection Chart Standard |
|                 |          | Color             | The Naked Eye          | No Issue                                   |
|                 |          | Noise             | The Naked Eye          | Not Allowed                                |
|                 |          | Corner Dark       | The Naked Eye          | Less Than 100px By 100px                   |
|                 |          | Color Resolution  | The Naked Eye          | No Issue                                   |
|                 |          | Height            | The Naked Eye          | Follows Approval Data Sheet                |
|                 |          | Width             | The Naked Eye          | Follows Approval Data Sheet                |
| Dimer           | ISION    | Length            | The Naked Eye          | Follows Approval Data Sheet                |
|                 |          | Overall           | The Naked Eye          | Follows Approval Data Sheet                |

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## **KLT Package Solutions**

#### **KLT** Camera Module




Tray with Grid and Space





Place Cameras on the Tray

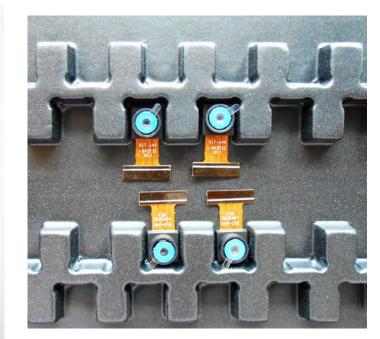



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## **Camera Modules Package Solution**

Full Tray of Cameras



Put Tray into Anti-Static Bag

Cover Tray with Lid



Vacuum the Anti-Static Bag





www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

### **Camera Modules Package Solution**

Sealed Vacuum Bag with Labels 1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## Large Order Package Solution

Place Foam Sheets Between Trays

Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box

Foam Sheets are Tightly Fitting Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## **Small Order Package Solution**

Place Foam Sheets and Trays into Small Box

Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## **Carbon Box Package Solution**

Seal the Carbon Box

Final Package Labelled Box



**Carbon Box Ready for Shipment** 

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## Sample Order Package Solution

Place Sample into Small Anti-Static Bag

Place Connectors into Small Ant-Static Bag





#### Sample Labels on the Small Bag 1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



your BEST camera module partner

## **Connectors Large Order Package Solution**

Connectors in a Wheel



The Wheel is Perfectly Fitting the Box

Label Connectors in the Wheel



**Connectors Box Ready for Shipment** 



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

#### Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.



#### Limited Warranty

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, <u>www.KaiLapTech.com</u>. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequential events.



## KIT

## CMOS CAMERA MODULES

your BEST camera module partner

#### **KLT Strength**

**Powerful Factory** 



#### **Professional Service**



#### **Promised Delivery**



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778