


KLT-M4MF-OS05A20 V2.0 IR940S

5MP OmniVision OS05A20 MIPI Interface M12 940nm IR Pass
Fixed Focus Camera Module



Front View

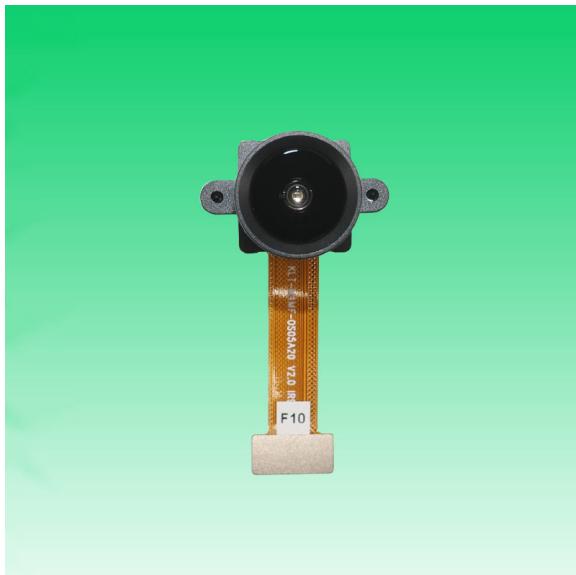

Back View

Specifications

Camera Module No.	KLT-M4MF-OS05A20 V2.0 IR940S
Resolution	5MP
Image Sensor	OS05A20
Sensor Type	1/2.7"
Pixel Size	2.0 um x 2.0 um
EFL	2.87 mm
F.NO	2.20
Pixel	2688 x 1944
View Angle	96.0°(DFOV) 83.8°(HFOV) 66.2°(VFOV)
Lens Dimensions	13.10 x 13.10 x 16.62 mm
Module Size	40.00 x 22.00 mm
Module Type	Fixed Focus
Interface	MIPI
Auto Focus VCM Driver IC	None
Lens Type	650nm IR Cut
Operating Temperature	-30°C to +85°C
Mating Connector	WP7A-S024VA1

**KLT-M4MF-OS05A20 V2.0 IR940S****5MP OmniVision OS05A20 MIPI Interface M12 940nm IR Pass
Fixed Focus Camera Module**


Top View





Side View




Bottom View

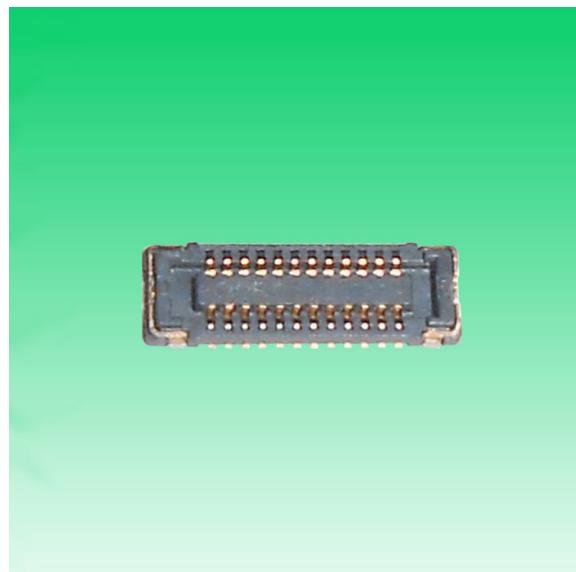


Mating Connector

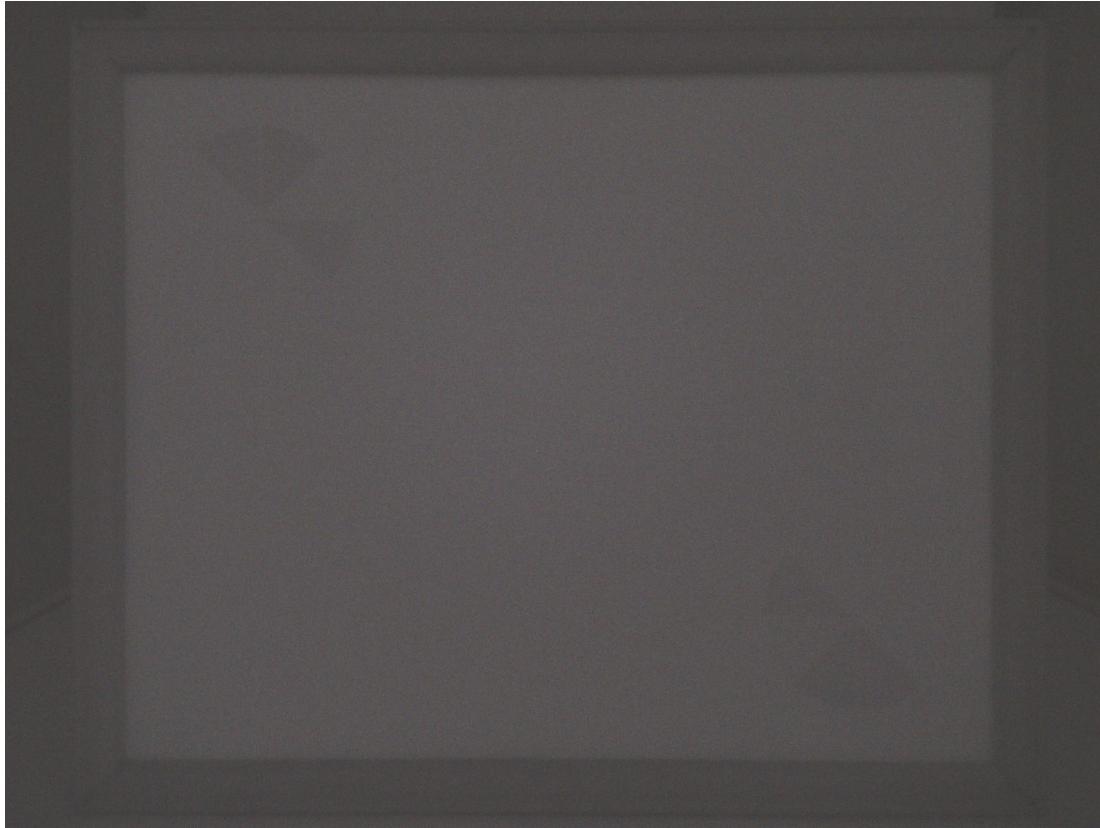
*your **BEST** camera module partner*


www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

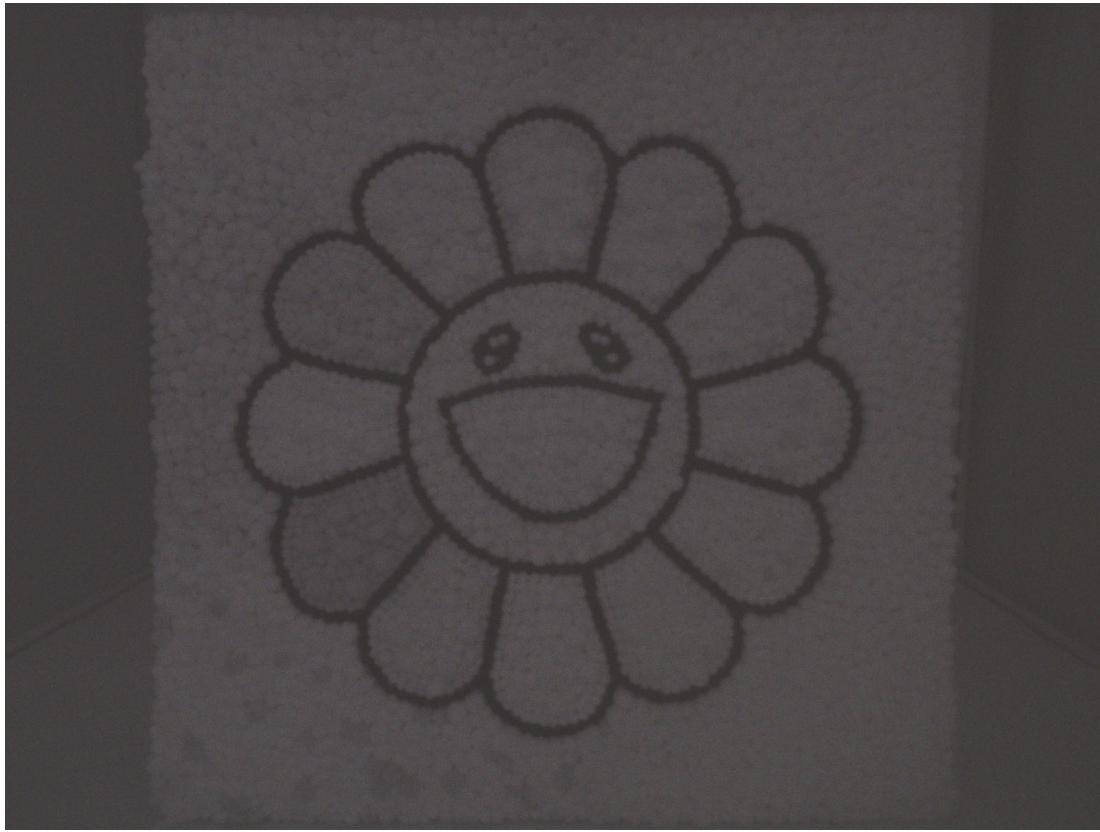

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

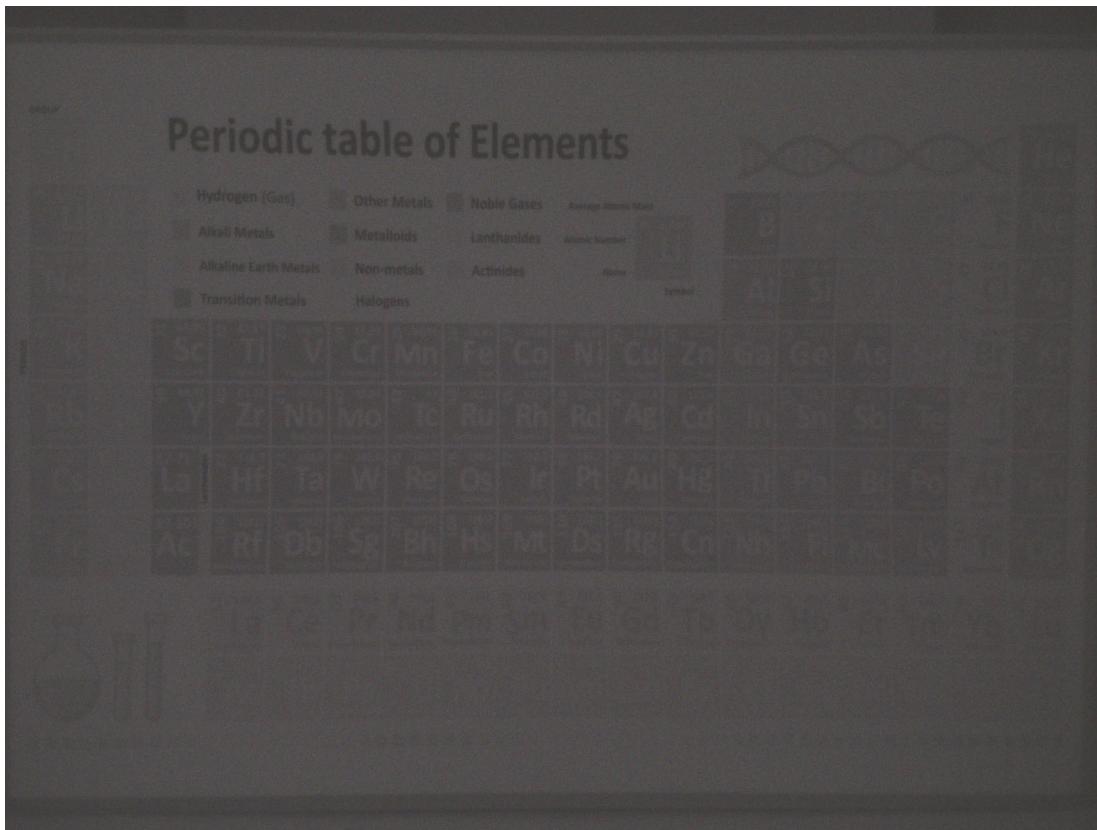

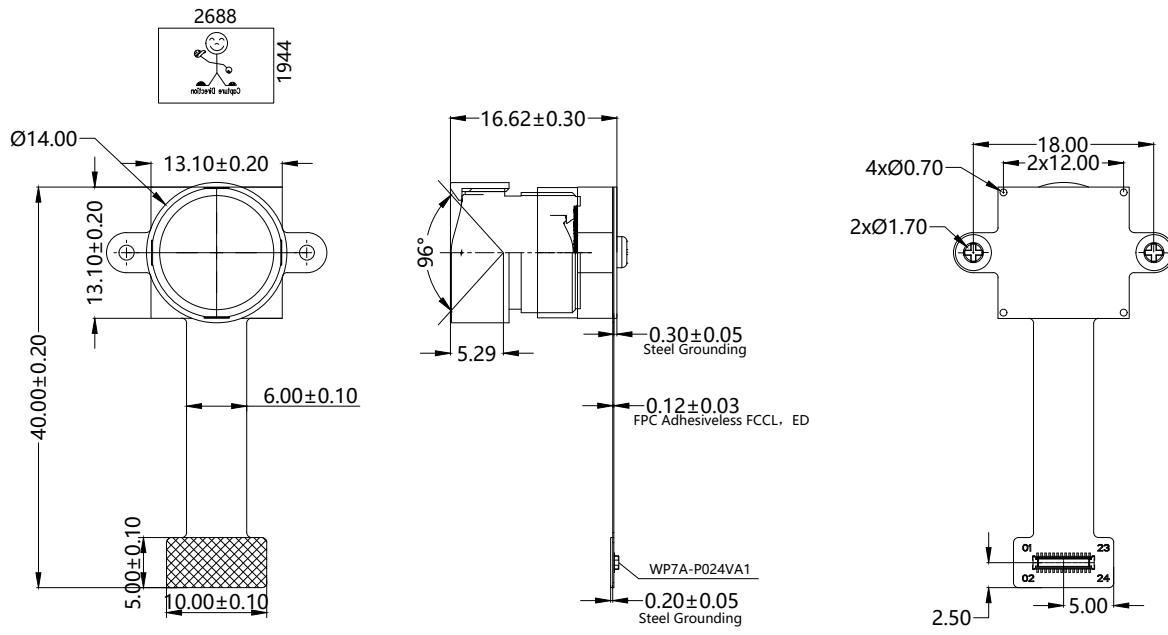A	B	C	D	E																		
RoHS																						
				Version Information																		
				V2.0 First Version																		
PIN	SIGNAL																					
1	AGND																					
2	AVDD 2.8V																					
3	SDA																					
4	SCL																					
5	PWDN																					
6	RST/XSHUTDOWN																					
7	MCP																					
8	MCN																					
9	DGND																					
10	MDP0																					
11	MDN0																					
12	DGND																					
13	MDP1																					
14	MDN1																					
15	DGND																					
16	MDP2																					
17	MDN2																					
18	DGND																					
19	MDP3																					
20	MDN3																					
21	DGND																					
22	DVDD 1.2V																					
23	DOVDD 1.8V																					
24	MCLK																					
NOTE:																						
1.The device slave address:0x6C(w);0x6D(r)																						
Parameter:																						
1. Sensor specification:																						
Image Sensor: OS05A20																						
Pixel: 2um*2um																						
Lens Type: 1/2.7																						
Important Voltage Description:																						
DVDD1.2V (external power supply);																						
A	B	C	D	E																		
																						
<p>NOTE: 1.The device slave address:0x6C(w);0x6D(r)</p> <p>Parameter:</p> <p>1. Sensor specification:</p> <p>Image Sensor: OS05A20</p> <p>Pixel: 2um*2um</p> <p>Lens Type: 1/2.7</p> <p>Important Voltage Description:</p> <p>DVDD1.2V (external power supply);</p>																						
<p>Kai Lap Technologies Group Ltd</p> <table border="1"> <tr> <td>Designed By</td> <td>Kevin</td> <td>Model Name:</td> <td colspan="3">KLT-M4MF-OS05A20 V2.0 IR940S</td> </tr> <tr> <td>Checked By</td> <td>Jacky</td> <td>Projection Type:</td> <td>Unit: mm</td> <td>Date:</td> <td>1/8/2024</td> </tr> <tr> <td></td> <td></td> <td>Third Angle</td> <td>Scale: 1:1</td> <td>Sheet: 1 of 1</td> <td>Version: 1/0</td> </tr> </table>					Designed By	Kevin	Model Name:	KLT-M4MF-OS05A20 V2.0 IR940S			Checked By	Jacky	Projection Type:	Unit: mm	Date:	1/8/2024			Third Angle	Scale: 1:1	Sheet: 1 of 1	Version: 1/0
Designed By	Kevin	Model Name:	KLT-M4MF-OS05A20 V2.0 IR940S																			
Checked By	Jacky	Projection Type:	Unit: mm	Date:	1/8/2024																	
		Third Angle	Scale: 1:1	Sheet: 1 of 1	Version: 1/0																	



OS05A20 5-megapixel product brief



available in
a lead-free
package

New OS05A20 Uses Nyxel® Technology to Bring Superior Image Quality to Video Surveillance Cameras Day or Night

The 5-megapixel OS05A20 is the world's first image sensor to implement Nyxel® technology, OmniVision's breakthrough near-infrared (NIR) technology that allows image sensors to see better and farther under low- and no-light conditions. By using Nyxel® technology and a 2 x 2 micron pixel, the OS05A20 PureCel® image sensor has the unique ability to capture high-quality, high-resolution day or night, making it ideally suited for professional surveillance systems.

Nyxel® technology combines thick-silicon pixel architectures with extended deep trench isolation (DTI) to improve quantum efficiency (QE) up to 3x for 850 nm sensitivity and up to 5x for 940 nm sensitivity, while

maintaining all other image-quality metrics. These improvements deliver unrivaled image quality, extended image-detection range and a reduced light-source requirement, leading to lower power consumption.

Available in a 1/2.7-inch optical format, the OS05A20 is capable of capturing full-resolution 2688 x 1944 video at 60 frames per second (fps), 1080p full high definition (HD) video at 120 fps, and 720p HD video at 180 fps. The sensor comes in a chip scale package (CSP).

Find out more at www.ovt.com.




Omni*Vision*

Applications

- Security Cameras
- Action Cameras
- High Resolution Consumer Cameras

OS05A20



Product Features

- 2 μ m x 2 μ m pixel
- optical size of 1/2.7"
- QE enhancement in 850 nm and 940 nm
- programmable controls for:
 - frame rate
 - mirror and flip
 - cropping
 - windowing
- supports output formats:
 - 12-/10-bit RAW RGB
- supports image sizes:
 - 2688 x 1944
 - 1080p (1920x1080)
 - 720p (1280x720)
- supports 2x2 binning
- standard serial SCCB interface
- 12/10-bit ADC
- up to 4-lane MIPI/LVDS serial output interface (supports maximum speed up to 1500 Mbps/lane)
- 2-exposure staggered HDR support
- programmable I/O drive capability
- light sensing mode (LSM)
- PLL with SCC support
- support for frame sync


Ordering Information

- OS05A20-H73A-1B
(color, lead-free) 73-pin CSP
- OS05A20-H73A-1C
(color, lead-free) 73-pin CSP

Technical Specifications


- **active array size:** 2688 x 1944
- **maximum image transfer rate:**
 - 2688 x 1944: 60 fps
 - 2688 x 1520: 60 fps
- **power supply:**
 - core: 1.2V
 - analog: 2.8V
 - I/O: 1.8V
- **power requirements:**
 - active: 210 mW
 - standby: 2 mA
 - XSHUTDOWN: 2 μ A
- **temperature range:**
 - operating: -30°C to +85°C junction temperature
 - stable image: 0°C to +60°C junction temperature
- **output formats:** 10/12-bit RGB RAW
- **lens size:** 1/2.7"
- **lens chief ray angle:** 11° linear
- **scan mode:** progressive
- **pixel size:** 2.0 μ m x 2.0 μ m
- **image area:** 5434.56 μ m x 3948.05 μ m

Functional Block Diagram

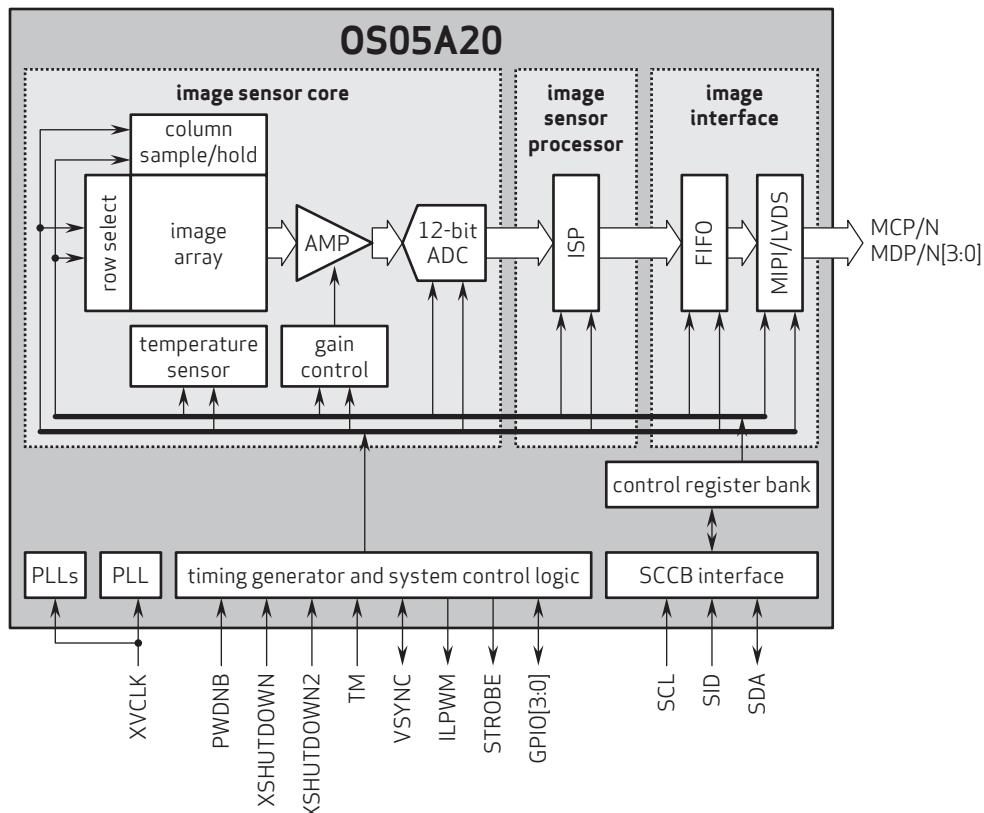


0.4mm Pitch, Stacking Type
Board-to-Board (FPC) Connector**WP7 Series**CONNECTOR
MB-0228-3
September 2017**RoHS Compliant**


Plug




Plug

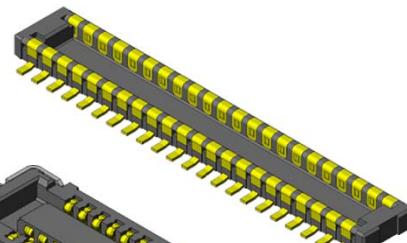

Receptacle

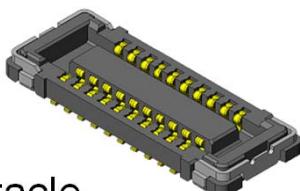

Receptacle

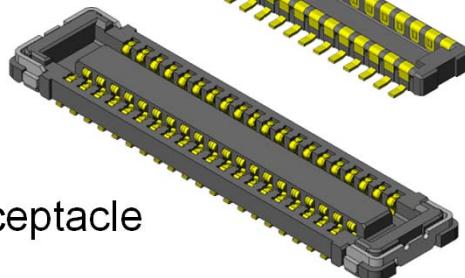

The WP7 Series is a low-profile board-to-board (FPC) connector with 0.4mm pitch spacing that is ideal for high-density mounting in slim information communication devices like mobile phones, smartphones, LCD, and notebook PC.

To satisfy different product function requirements, a low pin count type and a high pin count type (WP7A / WP7B) are available with the same mounting pattern.

Features

- 0.4mm pitch, 2 rows, 0.7mm stacking height.
- Contact structure ensures high wear-resistance and high contact reliability.
- Secure hold-downs prevent insulator breakage and peeling from FPC.
- 2-point contact design to resist twisting stress.
- Pb-free (Ni barrier on contact prevents solder wicking.)
- Receptacle contacts adopt an optimal configuration according to the pin counts.
High removal force WP7A (low pin count: 10-32 pos.)
Low insertion force WP7B (high pin count 34-70 pos.)
- Signal contact supports 10 Gbps transmission rate.
- Supports MIPI, USB3.1 Gen2, and PCIe Gen3 transmission.



General Specifications

- (WP7A) No. of Contacts:
10, 16, 20, 22, 24, 26,
28, 30, 32 pos.
- (WP7B) No. of Contacts:
34, 40, 50, 60, 70 pos.
- Pitch: 0.4mm, 2 rows
- Operating Temperature:
-40 Deg. C to +85 Deg. C
- Contact Resistance:
70mΩ max. (initial)
- Life Time: 30 mating cycles

- Rated Current: AC, DC 0.3A each per terminal
- Rated Voltage: AC, DC 50V
- Insulation Resistance: 100MΩ min. (initial)
- Dielectric Withstanding Voltage:
AC250Vr.m.s for 1 minute
- (WP7A) total insertion force:
1.50N x n max. (n: No. of pos.)
- (WP7A) total removal force:
0.15N x n min. (n: No. of pos.)
- (WP7B) total insertion force:
1.00N x n max. (n: No. of pos.)
- (WP7B) total removal force:
0.10N x n min. (n: No. of pos.)

Part Number	WP7A-S***VA1
SJ Drawing	SJ111877

WP7A Receptacle

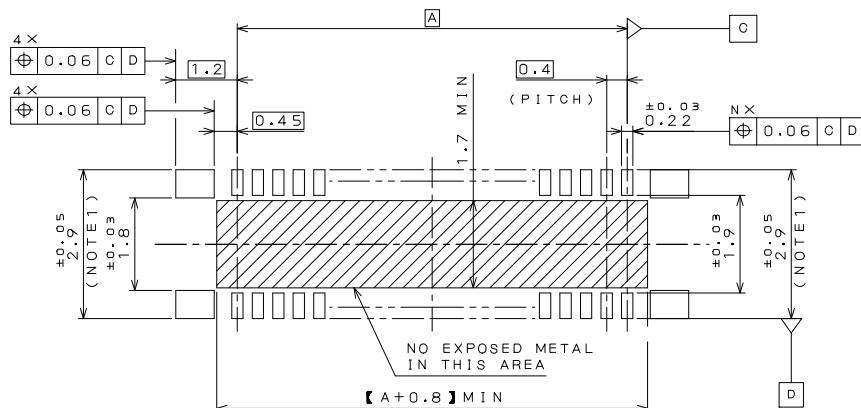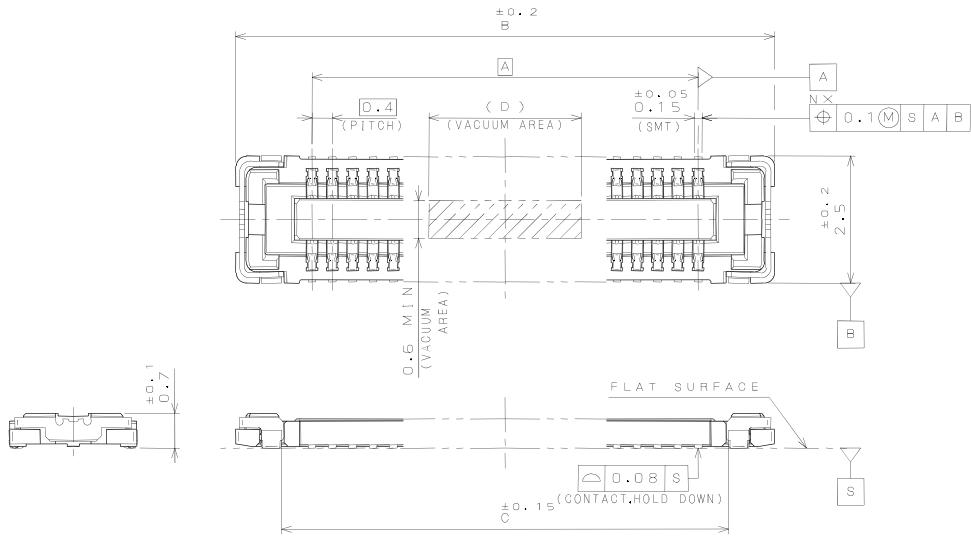

APPLICABLE P+C+B DIMENSION (REF.)
適合基板寸法(参考)

NUMBER OF CONTACT 芯数	DIMENSIONS 寸法			
	A	B	C	D
10	1.6	4.6	2.8	2.0
16	2.8	5.8	4.0	2.0
20	3.6	6.6	4.8	2.0
22	4.0	7.0	5.2	2.0
24	4.4	7.4	5.6	2.0
26	4.8	7.8	6.0	5.0
28	5.2	8.2	6.4	5.0
30	5.6	8.6	6.8	5.0
32	6.0	9.0	7.2	5.0

Note 1) Dimension 3.5 ± 0.05 is recommended in case repair is needed.

Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

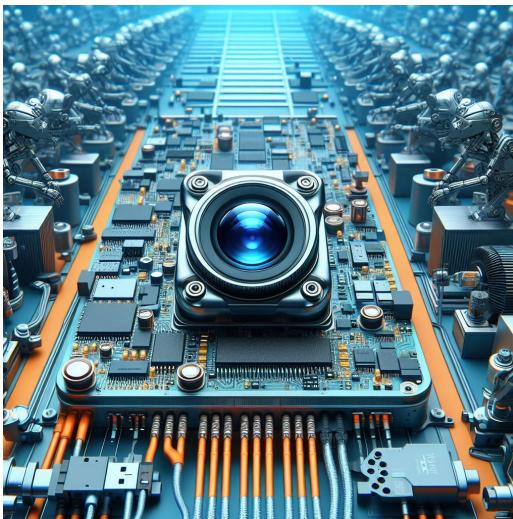

Machine Vision



Agricultural Monitor

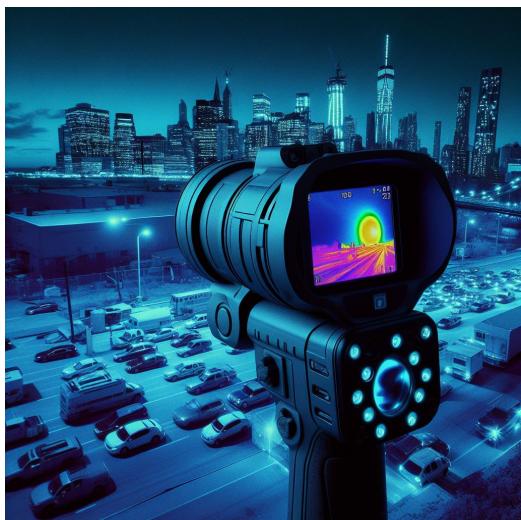

Night Vision Security



Drone and Sports Eagle Eyes



Interactive Pet Camera

Cameras Applications



Camera Module Pinout Definition Reference Chart

Pin Signal	Description
DGND GND	ground for digital circuit
AGND	ground for analog circuit
PCLK DCK	DVP PCLK output
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor
MCLK XVCLK XCLK INCK	system input clock
RESET RST	reset active low with internal pull-up resistor
NC NULL	no connect
SDA SIO_D SIOD	SCCB data
SCL SIO_C SIOC	SCCB input clock
VSYNC XVS FSYNC	DVP VSYNC output
HREF XHS	DVP HREF output
DOVDD	power for I/O circuit
AFVDD	power for VCM circuit
AVDD	power for analog circuit
DVDD	power for digital circuit
STROBE FSTROBE	strobe output
FSIN	synchronize the VSYNC signal from the other sensor
SID	SCCB last bit ID input
ILPWM	mechanical shutter output indicator
FREX	frame exposure / mechanical shutter
GPIO	general purpose inputs
SLASEL	I2C slave address select
AFEN	CEN chip enable active high on VCM driver IC
MIPI Interface	
MDN0 DN0 MD0N DATA_N DMO1N	MIPI 1st data lane negative output
MDP0 DP0 MD0P DATA_P DMO1P	MIPI 1st data lane positive output
MDN1 DN1 MD1N DATA2_N DMO2N	MIPI 2nd data lane negative output
MDP1 DP1 MD1P DATA2_P DMO2P	MIPI 2nd data lane positive output
MDN2 DN2 MD2N DATA3_N DMO3N	MIPI 3rd data lane negative output
MDP2 DP2 MD2P DATA3_P DMO3P	MIPI 3rd data lane positive output
MDN3 DN3 MD3N DATA4_N DMO4N	MIPI 4th data lane negative output
MDP3 DP3 MD3P DATA4_P DMO4P	MIPI 4th data lane positive output
MCN CLKN CLK_N DCKN	MIPI clock negative output
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output
DVP Parallel Interface	
D0 DO0 Y0	DVP data output port 0
D1 DO1 Y1	DVP data output port 1
D2 DO2 Y2	DVP data output port 2
D3 DO3 Y3	DVP data output port 3
D4 DO4 Y4	DVP data output port 4
D5 DO5 Y5	DVP data output port 5
D6 DO6 Y6	DVP data output port 6
D7 DO7 Y7	DVP data output port 7
D8 DO8 Y8	DVP data output port 8
D9 DO9 Y9	DVP data output port 9
D10 DO10 Y10	DVP data output port 10
D11 DO11 Y11	DVP data output port 11

Camera Reliability Test

Reliability Inspection Item		Testing Method	Acceptance Criteria	
Category	Item			
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	The Naked Eye
		Be Torn/Chopped	The Naked Eye
		Marking	The Naked Eye
	Holder	Scratches	The Naked Eye
		Gap	The Naked Eye
		Screw	The Naked Eye
		Damage	The Naked Eye
	Lens	Scratch	The Naked Eye
		Contamination	The Naked Eye
		Oil Film	The Naked Eye
		Cover Tape	The Naked Eye
Function	Image	No Communication	Test Board
		Bright Pixel	Black Board
		Dark Pixel	White board
		Blurry	The Naked Eye
		No Image	The Naked Eye
		Vertical Line	The Naked Eye
		Horizontal Line	The Naked Eye
		Light Leakage	The Naked Eye
		Blinking Image	The Naked Eye
		Bruise	Inspection Jig
		Resolution	Chart
		Color	The Naked Eye
		Noise	The Naked Eye
		Corner Dark	Less Than 100px By 100px
Dimension	Dimension	Color Resolution	The Naked Eye
		Height	The Naked Eye
		Width	The Naked Eye
		Length	The Naked Eye
		Overall	The Naked Eye




CMOS CAMERA MODULES

your *BEST* camera module partner

KLT Package Solutions

KLT Camera Module

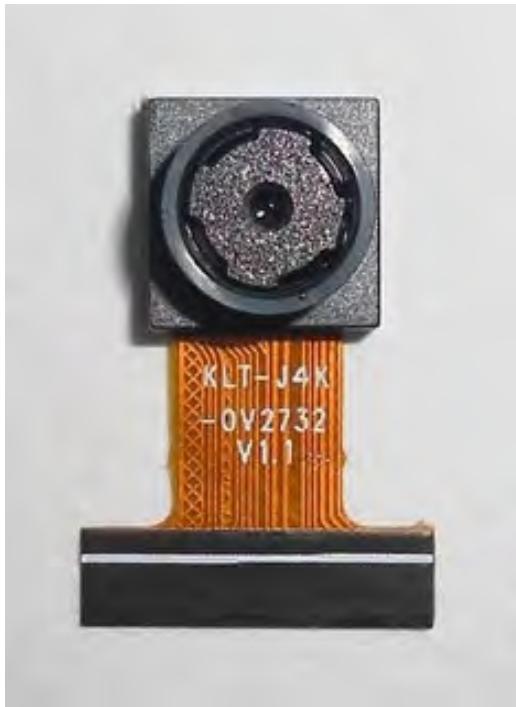


Complete with Lens Protection Film



Tray with Grid and Space



Place Cameras on the Tray

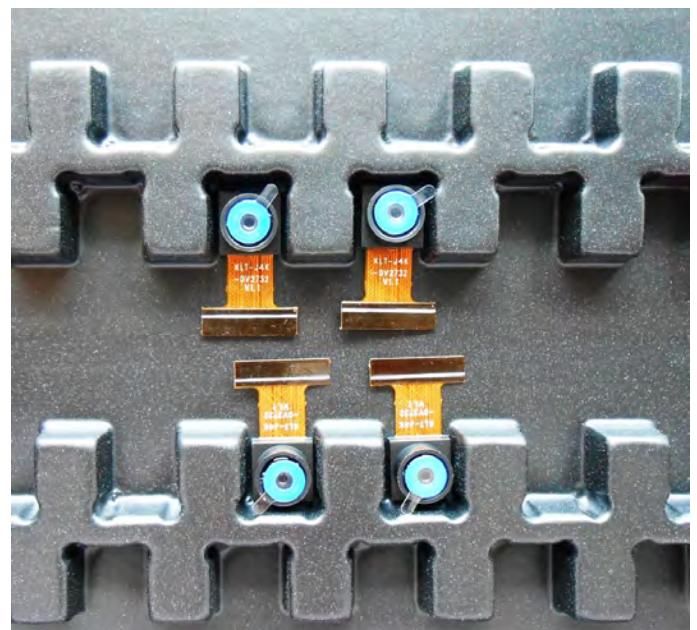

Camera Modules Package Solution

Full Tray of Cameras




Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

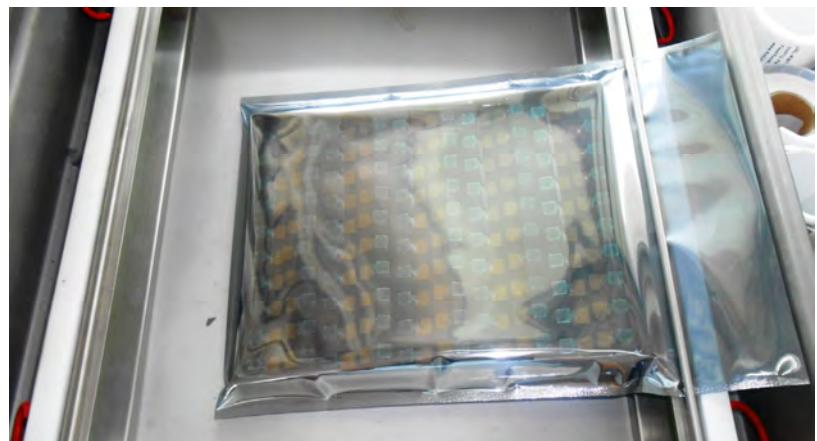



CMOS CAMERA MODULES

your *BEST* camera module partner



Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

Large Order Package Solution

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box





CMOS CAMERA MODULES

your BEST camera module partner

Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your *BEST* camera module partner

Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution





Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel



The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

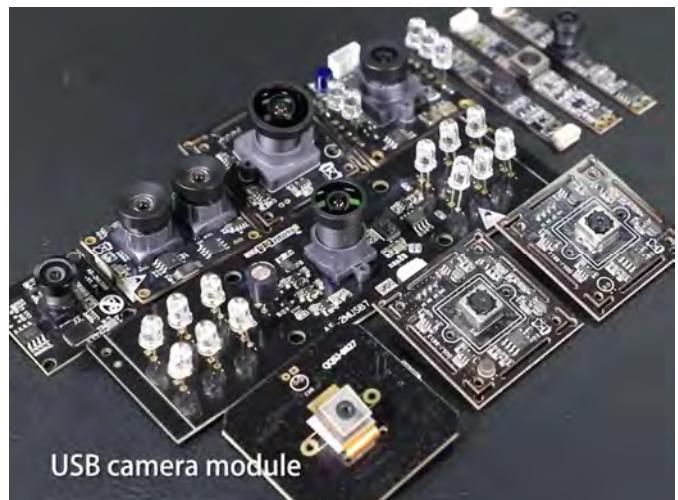**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.



KLT Strength**Powerful Factory****Professional Service****Promised Delivery**