

## KLT-MFA98-OV02C10 V1.0

2MP OmniVision OV02C10 MIPI Interface Fixed Focus Camera Module



Front View



Back View

## Specifications

Camera Module No.	KLT-MFA98-OV02C10 V1.0
Resolution	2MP
Image Sensor	OV02C10
Sensor Type	1/7.25"
Pixel Size	1.116 um x 1.116 um
EFL	1.44 mm
F.NO	2.00
Pixel	1920 x 1080
View Angle	80.1°(DFOV) 72.2°(HFOV) 72.2°(VFOV)
Lens Dimensions	5.50 x 3.60 x 2.80 mm
Module Size	25.00 x 8.00 mm
Module Type	Fixed Focus
Interface	MIPI
Auto Focus VCM Driver IC	None
Lens Type	650nm IR Cut
Operating Temperature	-30°C to +85°C
Mating Connector	DF30FC-24DS-0.4V

**KLT-MFA98-OV02C10 V1.0****2MP OmniVision OV02C10 MIPI Interface Fixed Focus Camera Module**

Top View




Side View





Bottom View



Mating Connector

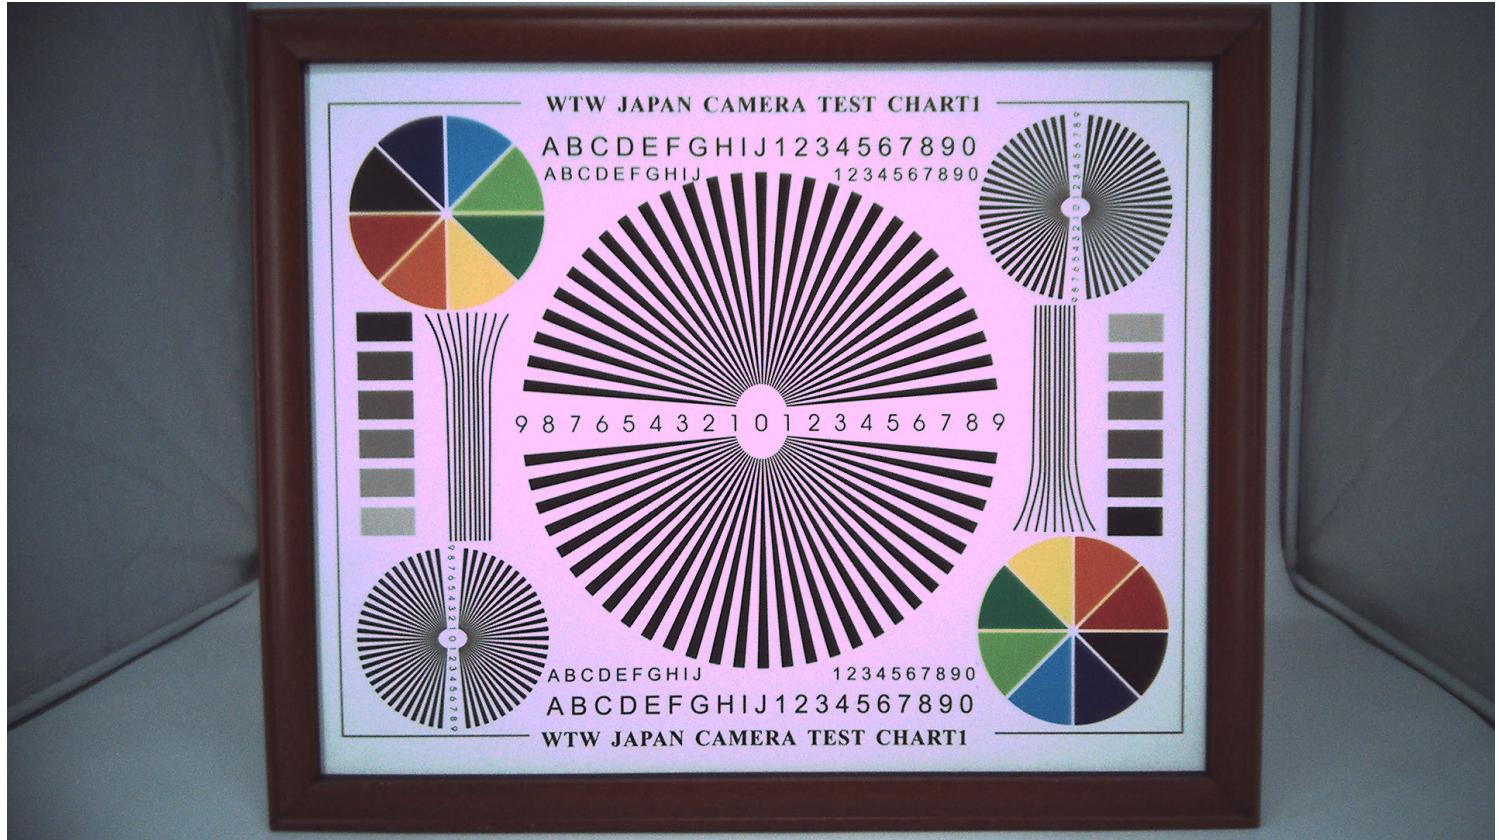


[www.KaiLapTech.com](http://www.KaiLapTech.com) [sales@KaiLapTech.com](mailto:sales@KaiLapTech.com) Tel: (852) 6908 1256 Fax: (852) 3017 6778

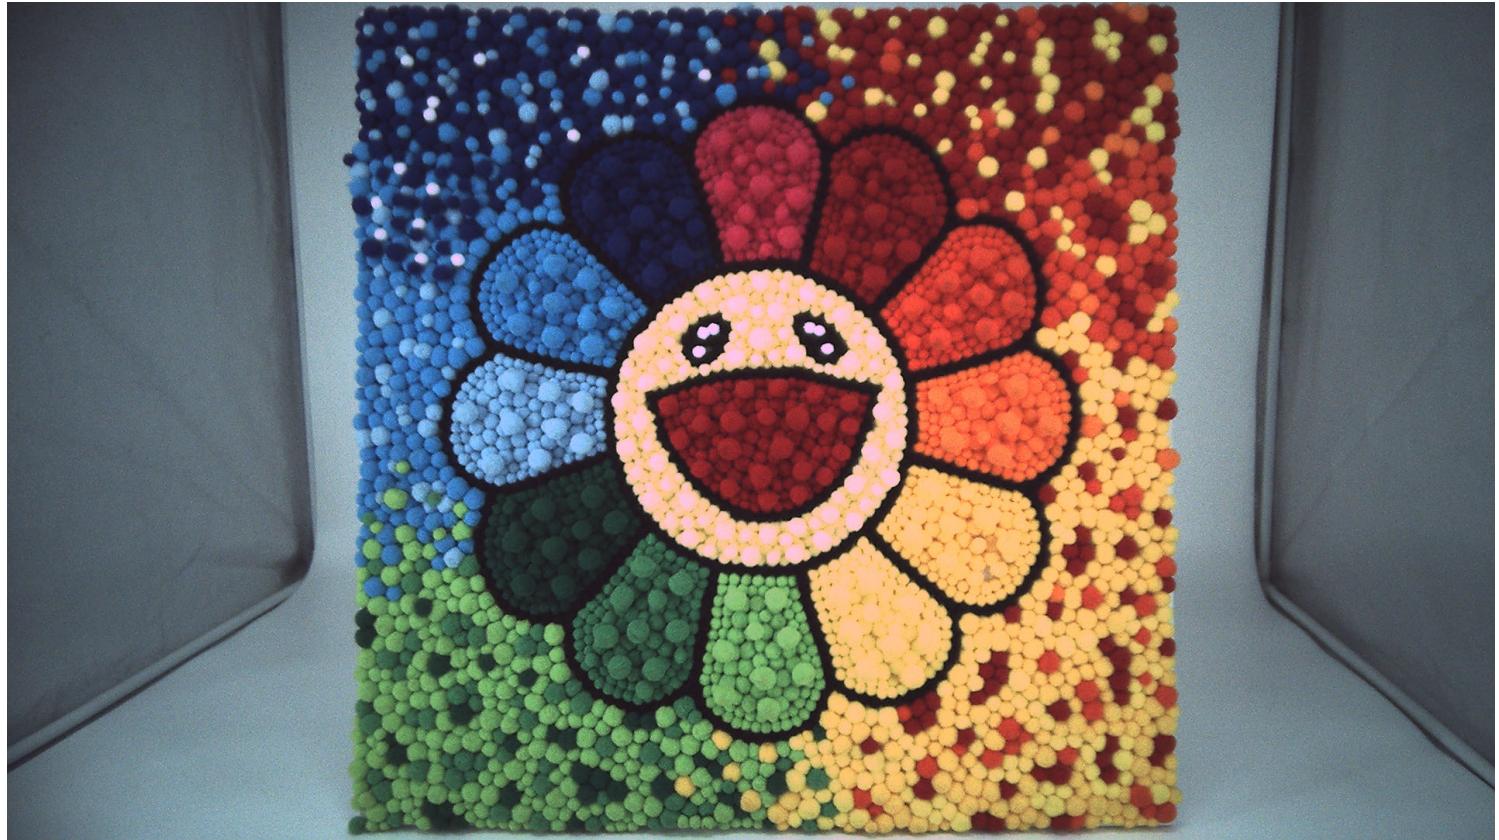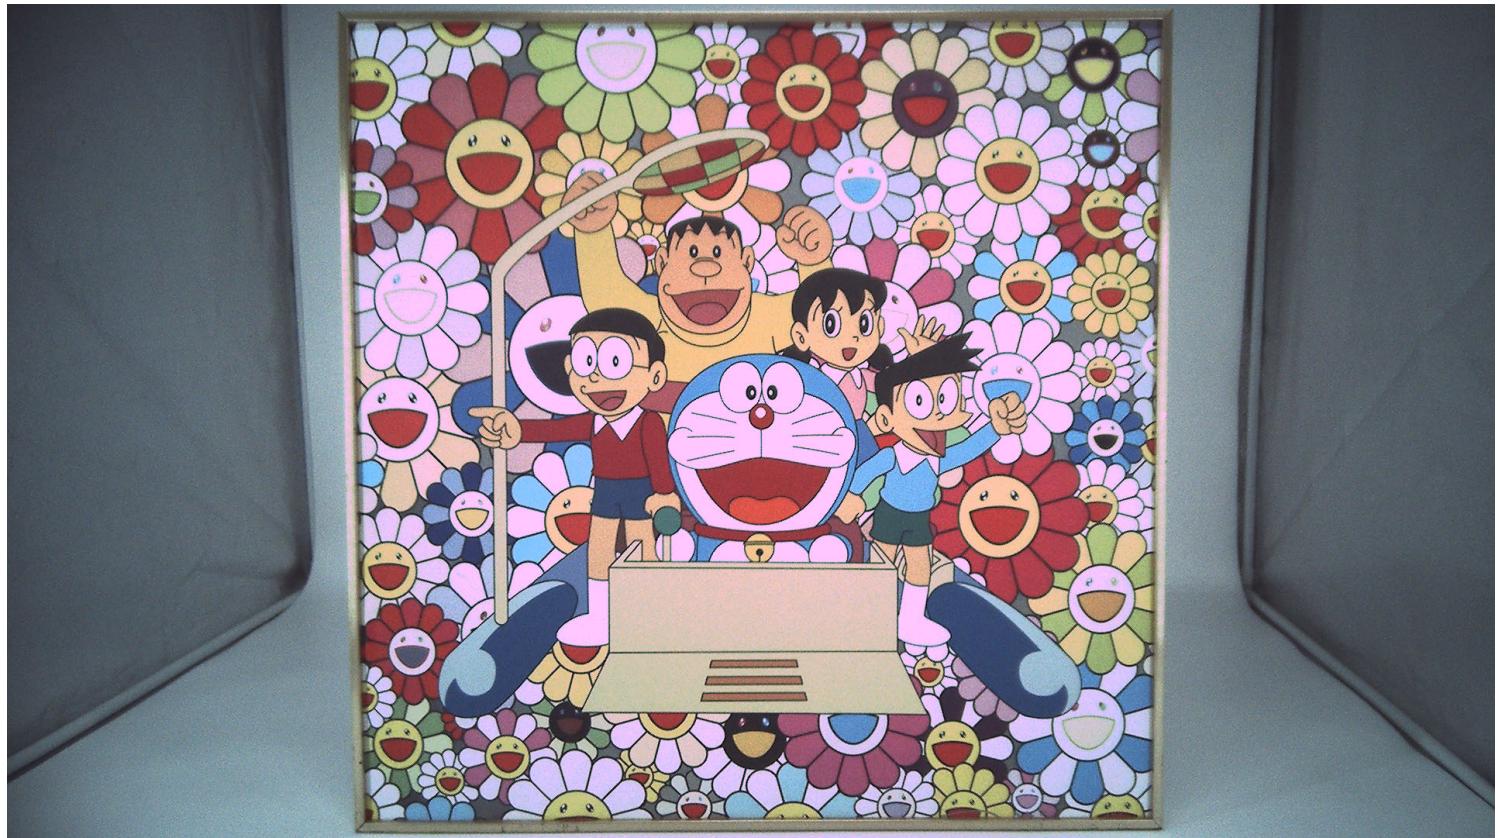


[www.KaiLapTech.com](http://www.KaiLapTech.com) [sales@KaiLapTech.com](mailto:sales@KaiLapTech.com) Tel: (852) 6908 1256 Fax: (852) 3017 6778

9,01 <b>Be</b> Beryllium	Hydrogen (Gas)	Other Metals	Noble Gases	Average Atomic Mass	5 10,81 <b>B</b> Boron	6 12,01 <b>C</b> Carbon	7 14 Nitro
24,31 <b>Mg</b> magnesium	Alkali Metals	Metalloids	Lanthanides	Atomic Number	3 6,941 <b>Li</b> Lithium	Symbol	13 26,98 <b>Al</b> Aluminium
40,08 <b>Ca</b> Calcium	Alkaline Earth Metals	Non-metals	Actinides	Name	14 28,08 <b>Si</b> Silicon	15 30 Phospho	33 74 <b>A</b> Arsen
21 44,95 <b>Sc</b> Scandium	Transition Metals	Halogens			32 72,61 <b>Ge</b> Germanium		51 121 <b>Sn</b> Antimo
22 47,87 <b>Ti</b> Titanium					31 69,72 <b>Ga</b> Gallium		52 118,7 <b>Se</b> Selen
23 50,94 <b>V</b> Vanadium					30 65,39 <b>Zn</b> Zink		53 208 <b>B</b> Bismu
24 51,99 <b>Cr</b> Chromium					31 69,72 <b>Ga</b> Gallium		54 114,8 <b>In</b> Indium
25 54,94 <b>Mn</b> Manganese					32 72,61 <b>Ge</b> Germanium		55 118,7 <b>Sn</b> Tin
26 55,85 <b>Fe</b> Iron					33 74 <b>A</b> Arsen		56 121 <b>Se</b> Antimo
27 58,93 <b>Co</b> Kobalt					34 78,9 <b>Ge</b> Germanium		57 121 <b>Sn</b> Antimo
28 58,69 <b>Ni</b> Nickel					35 82,9 <b>As</b> Arsen		58 121 <b>Se</b> Antimo
29 63,55 <b>Cu</b> Copper					36 86,9 <b>Se</b> Selen		59 121 <b>Sn</b> Antimo
30 65,39 <b>Zn</b> Zink					37 91,9 <b>Br</b> Brom		60 121 <b>Se</b> Antimo
31 69,72 <b>Ga</b> Gallium					38 95,9 <b>Te</b> Tellur		61 121 <b>Se</b> Antimo
32 72,61 <b>Ge</b> Germanium					39 100,9 <b>At</b> Astatin		62 121 <b>Se</b> Antimo
33 74 <b>A</b> Arsen					40 102,9 <b>Rh</b> Rhodium		63 121 <b>Se</b> Antimo
34 78,9 <b>Ge</b> Germanium					41 106,4 <b>Rd</b> Rutherfordium		64 121 <b>Se</b> Antimo
35 82,9 <b>As</b> Arsen					42 107,9 <b>Ag</b> Silver		65 121 <b>Se</b> Antimo
36 86,9 <b>Se</b> Selen					43 112,4 <b>Cd</b> Cadmium		66 121 <b>Se</b> Antimo
37 91,9 <b>Br</b> Brom					44 114,8 <b>In</b> Indium		67 121 <b>Se</b> Antimo
38 95,9 <b>Te</b> Tellur					45 118,7 <b>Sn</b> Tin		68 121 <b>Se</b> Antimo
39 100,9 <b>At</b> Astatin					46 121 <b>Se</b> Antimo		69 121 <b>Se</b> Antimo
40 102,9 <b>Rh</b> Rhodium					47 121 <b>Se</b> Antimo		70 121 <b>Se</b> Antimo
41 106,4 <b>Rd</b> Rutherfordium					48 121 <b>Se</b> Antimo		71 121 <b>Se</b> Antimo
42 107,9 <b>Ag</b> Silver					49 121 <b>Se</b> Antimo		72 121 <b>Se</b> Antimo
43 112,4 <b>Cd</b> Cadmium					50 121 <b>Se</b> Antimo		73 121 <b>Se</b> Antimo
44 114,8 <b>In</b> Indium					51 121 <b>Se</b> Antimo		74 121 <b>Se</b> Antimo
45 118,7 <b>Sn</b> Tin					52 121 <b>Se</b> Antimo		75 121 <b>Se</b> Antimo
46 121 <b>Se</b> Antimo					53 121 <b>Se</b> Antimo		76 121 <b>Se</b> Antimo
47 121 <b>Se</b> Antimo					54 121 <b>Se</b> Antimo		77 121 <b>Se</b> Antimo
48 121 <b>Se</b> Antimo					55 121 <b>Se</b> Antimo		78 121 <b>Se</b> Antimo
49 121 <b>Se</b> Antimo					56 121 <b>Se</b> Antimo		79 121 <b>Se</b> Antimo
50 121 <b>Se</b> Antimo					57 121 <b>Se</b> Antimo		80 121 <b>Se</b> Antimo
51 121 <b>Se</b> Antimo					58 121 <b>Se</b> Antimo		81 121 <b>Se</b> Antimo
52 121 <b>Se</b> Antimo					59 121 <b>Se</b> Antimo		82 121 <b>Se</b> Antimo
53 121 <b>Se</b> Antimo					60 121 <b>Se</b> Antimo		83 121 <b>Se</b> Antimo
54 121 <b>Se</b> Antimo					61 121 <b>Se</b> Antimo		84 121 <b>Se</b> Antimo
55 121 <b>Se</b> Antimo					62 121 <b>Se</b> Antimo		85 121 <b>Se</b> Antimo
56 121 <b>Se</b> Antimo					63 121 <b>Se</b> Antimo		86 121 <b>Se</b> Antimo
57 121 <b>Se</b> Antimo					64 121 <b>Se</b> Antimo		87 121 <b>Se</b> Antimo
58 121 <b>Se</b> Antimo					65 121 <b>Se</b> Antimo		88 121 <b>Se</b> Antimo
59 121 <b>Se</b> Antimo					66 121 <b>Se</b> Antimo		89 121 <b>Se</b> Antimo
60 121 <b>Se</b> Antimo					67 121 <b>Se</b> Antimo		90 121 <b>Se</b> Antimo
61 121 <b>Se</b> Antimo					68 121 <b>Se</b> Antimo		91 121 <b>Se</b> Antimo
62 121 <b>Se</b> Antimo					69 121 <b>Se</b> Antimo		92 121 <b>Se</b> Antimo
63 121 <b>Se</b> Antimo					70 121 <b>Se</b> Antimo		93 121 <b>Se</b> Antimo
64 121 <b>Se</b> Antimo					71 121 <b>Se</b> Antimo		94 121 <b>Se</b> Antimo
65 121 <b>Se</b> Antimo					72 121 <b>Se</b> Antimo		95 121 <b>Se</b> Antimo
66 121 <b>Se</b> Antimo					73 121 <b>Se</b> Antimo		96 121 <b>Se</b> Antimo
67 121 <b>Se</b> Antimo					74 121 <b>Se</b> Antimo		97 121 <b>Se</b> Antimo
68 121 <b>Se</b> Antimo					75 121 <b>Se</b> Antimo		98 121 <b>Se</b> Antimo
69 121 <b>Se</b> Antimo					76 121 <b>Se</b> Antimo		99 121 <b>Se</b> Antimo
70 121 <b>Se</b> Antimo					77 121 <b>Se</b> Antimo		100 121 <b>Se</b> Antimo
71 121 <b>Se</b> Antimo					78 121 <b>Se</b> Antimo		101 121 <b>Se</b> Antimo
72 121 <b>Se</b> Antimo					79 121 <b>Se</b> Antimo		102 121 <b>Se</b> Antimo
73 121 <b>Se</b> Antimo					80 121 <b>Se</b> Antimo		103 121 <b>Se</b> Antimo
74 121 <b>Se</b> Antimo					81 121 <b>Se</b> Antimo		104 121 <b>Se</b> Antimo
75 121 <b>Se</b> Antimo					82 121 <b>Se</b> Antimo		105 121 <b>Se</b> Antimo
76 121 <b>Se</b> Antimo					83 121 <b>Se</b> Antimo		106 121 <b>Se</b> Antimo
77 121 <b>Se</b> Antimo					84 121 <b>Se</b> Antimo		107 121 <b>Se</b> Antimo
78 121 <b>Se</b> Antimo					85 121 <b>Se</b> Antimo		108 121 <b>Se</b> Antimo
79 121 <b>Se</b> Antimo					86 121 <b>Se</b> Antimo		109 121 <b>Se</b> Antimo
80 121 <b>Se</b> Antimo					87 121 <b>Se</b> Antimo		110 121 <b>Se</b> Antimo
81 121 <b>Se</b> Antimo					88 121 <b>Se</b> Antimo		111 121 <b>Se</b> Antimo
82 121 <b>Se</b> Antimo					89 121 <b>Se</b> Antimo		112 121 <b>Se</b> Antimo
83 121 <b>Se</b> Antimo					90 121 <b>Se</b> Antimo		113 121 <b>Se</b> Antimo
84 121 <b>Se</b> Antimo					91 121 <b>Se</b> Antimo		114 121 <b>Se</b> Antimo
85 121 <b>Se</b> Antimo					92 121 <b>Se</b> Antimo		115 121 <b>Se</b> Antimo
86 121 <b>Se</b> Antimo					93 121 <b>Se</b> Antimo		116 121 <b>Se</b> Antimo
87 121 <b>Se</b> Antimo					94 121 <b>Se</b> Antimo		117 121 <b>Se</b> Antimo
88 121 <b>Se</b> Antimo					95 121 <b>Se</b> Antimo		118 121 <b>Se</b> Antimo
89 121 <b>Se</b> Antimo					96 121 <b>Se</b> Antimo		119 121 <b>Se</b> Antimo
90 121 <b>Se</b> Antimo					97 121 <b>Se</b> Antimo		120 121 <b>Se</b> Antimo
91 121 <b>Se</b> Antimo					98 121 <b>Se</b> Antimo		121 121 <b>Se</b> Antimo
92 121 <b>Se</b> Antimo					99 121 <b>Se</b> Antimo		122 121 <b>Se</b> Antimo
93 121 <b>Se</b> Antimo					100 121 <b>Se</b> Antimo		123 121 <b>Se</b> Antimo
94 121 <b>Se</b> Antimo					101 121 <b>Se</b> Antimo		124 121 <b>Se</b> Antimo
95 121 <b>Se</b> Antimo					102 121 <b>Se</b> Antimo		125 121 <b>Se</b> Antimo
96 121 <b>Se</b> Antimo					103 121 <b>Se</b> Antimo		126 121 <b>Se</b> Antimo
97 121 <b>Se</b> Antimo					104 121 <b>Se</b> Antimo		127 121 <b>Se</b> Antimo
98 121 <b>Se</b> Antimo					105 121 <b>Se</b> Antimo		128 121 <b>Se</b> Antimo
99 121 <b>Se</b> Antimo					106 121 <b>Se</b> Antimo		129 121 <b>Se</b> Antimo
100 121 <b>Se</b> Antimo					107 121 <b>Se</b> Antimo		130 121 <b>Se</b> Antimo
101 121 <b>Se</b> Antimo					108 121 <b>Se</b> Antimo		131 121 <b>Se</b> Antimo
102 121 <b>Se</b> Antimo					109 121 <b>Se</b> Antimo		132 121 <b>Se</b> Antimo
103 121 <b>Se</b> Antimo					110 121 <b>Se</b> Antimo		133 121 <b>Se</b> Antimo
104 121 <b>Se</b> Antimo					111 121 <b>Se</b> Antimo		134 121 <b>Se</b> Antimo
105 121 <b>Se</b> Antimo					112 121 <b>Se</b> Antimo		135 121 <b>Se</b> Antimo
106 121 <b>Se</b> Antimo					113 121 <b>Se</b> Antimo		136 121 <b>Se</b> Antimo
107 121 <b>Se</b> Antimo					114 121 <b>Se</b> Antimo		137 121 <b>Se</b> Antimo
108 121 <b>Se</b> Antimo					115 121 <b>Se</b> Antimo		138 121 <b>Se</b> Antimo
109 121 <b>Se</b> Antimo					116 121 <b>Se</b> Antimo		139 121 <b>Se</b> Antimo
110 121 <b>Se</b> Antimo					117 121 <b>Se</b> Antimo		140 121 <b>Se</b> Antimo
111 121 <b>Se</b> Antimo					118 121 <b>Se</b> Antimo		141 121 <b>Se</b> Antimo
112 121 <b>Se</b> Antimo					119 121 <b>Se</b> Antimo		142 121 <b>Se</b> Antimo
113 121 <b>Se</b> Antimo					120 121 <b>Se</b> Antimo		143 121 <b>Se</b> Antimo
114 121 <b>Se</b> Antimo					121 121 <b>Se</b> Antimo		144 121 <b>Se</b> Antimo
115 121 <b>Se</b> Antimo					122 121 <b>Se</b> Antimo		145 121 <b>Se</b> Antimo
116 121 <b>Se</b> Antimo					123 121 <b>Se</b> Antimo		146 121 <b>Se</b> Antimo
117 121 <b>Se</b> Antimo					124 121 <b>Se</b> Antimo		147 121 <b>Se</b> Antimo
118 121 <b>Se</b> Antimo					125 121 <b>Se</b> Antimo		148 121 <b>Se</b> Antimo
119 121 <b>Se</b> Antimo					126 121 <b>Se</b> Antimo		149 121 <b>Se</b> Antimo
120 121 <b>Se</b> Antimo					127 121 <b>Se</b> Antimo		150 121 <b>Se</b> Antimo
121 121 <b>Se</b> Antimo					128 121 <b>Se</b> Antimo		151 121 <b>Se</b> Antimo
122 121 <b>Se</b> Antimo					129 121 <b>Se</b> Antimo		152 121 <b>Se</b> Antimo
123 121 <b>Se</b> Antimo					130 121 <b>Se</b> Antimo		153 121 <b>Se</b> Antimo
124 121 <b>Se</b> Antimo					131 121 <b>Se</b> Antimo		154 121 <b>Se</b> Antimo
125 121 <b>Se</b> Antimo					132 121 <b>Se</b> Antimo		155 121 <b>Se</b> Antimo
126 121 <b>Se</b> Antimo					133 121 <b>Se</b> Antimo		156 121 <b>Se</b> Antimo
127 121 <b>Se</b> Antimo					134 121 <b>Se</b> Antimo		157 121 <b>Se</b> Antimo
128 121 <b>Se</b> Antimo					135 121 <b>Se</b> Antimo		158 121 <b>Se</b> Antimo
129 121 <b>Se</b> Antimo					136 121 <b>Se</b> Antimo		159 121 <b>Se</b> Antimo
130 121 <b>Se</b> Antimo					137 121 <b>Se</b> Antimo		160 121 <b>Se</b> Antimo
131 121 <b>Se</b> Antimo					138 121 <b>Se</b> Antimo		161 121 <b>Se</b> Antimo
132 121 <b>Se</b> Antimo					139 121 <b>Se</b> Antimo		


A		B		C		D		E	
RoHS								Version	Information
PIN	SIGNAL							V1.0	First Version
1	AVDD2.8V								
2	DVDD1.2V								
3	DOVDD1.8V								
4	XVCLK								
5	XSHUTDN								
6	NC								
7	SDA								
8	SCL								
9	STROBE								
10	DGND								
11	FSIN								
12	SID								
13	DGND								
14	MCP								
15	MCN								
16	DGND								
17	MDP0								
18	MDN0								
19	DGND								
20	MDP1								
21	MDN1								
22	DGND								
23	NC								
24	NC								

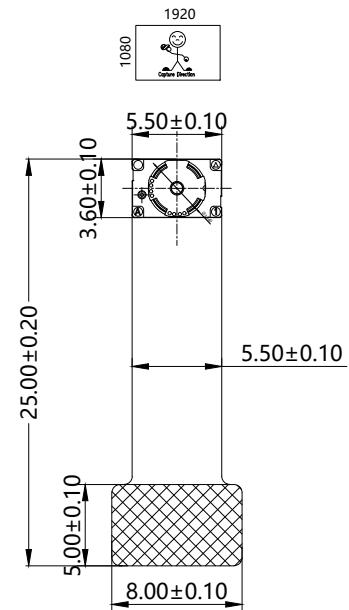

TOP VIEW

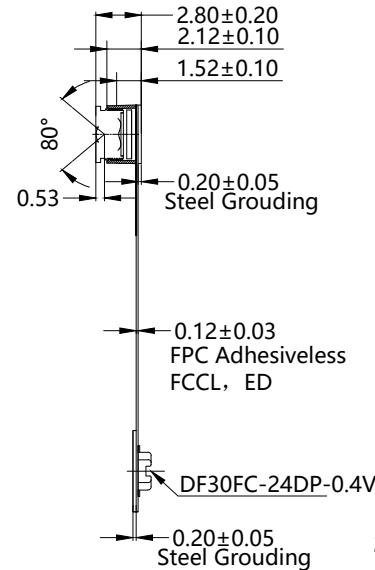

SIDE VIEW

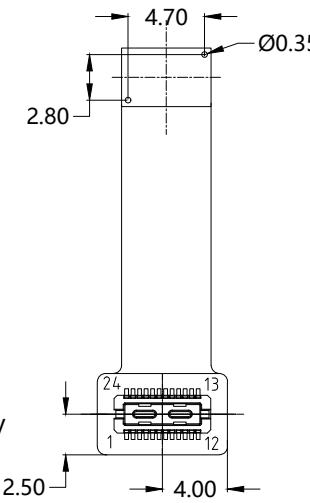

BOTTOM VIEW

## NOTE:

1. Sensor I2C slave address:  
0x6C If SID=0; or 0x20 If SID=1

## Parameter:

## 1. Sensor specification:

Image Sensor: OV02C10

Pixel: 1.116um\*1.116um

Lens Type: 1/7.25

## Important Voltage Description:

DVDD1.2V (external power supply);

## 2. Lens specification:

FOV: 80.1°(D); 72.2°(H); 72.2°(V)

F/NO.: 2.0

TV distortion: &lt;1.5%

Focal length: 1.44mm

Composition: 4P+IR FILTER

IR Cut Coating: 650nm±10nm@50%

Kai Lap Technologies Group Ltd

Designed By

Kevin

Model Name:

KLT-MFA98-OV02C10 V1.0

Checked By

Jacky

Projection Type:

Unit: mm Date: 4/28/2025

Scale: 1:1

Sheet: 1 of 1 Version: 1/0


A

B

C

D

E



# OV02C 2-megapixel product brief



available in  
a lead-free  
package

## Industry's Smallest 1080p Full HD Image Sensor for High Performance Video Communication in Thin Bezel Notebooks and Tablets

OmniVision's OV02C is a 1/7-inch, 2 megapixel image sensor for full high definition (HD) video performance in thin bezel premium notebooks, tablets and IoT devices. The OV02C is a full-featured image sensor that combines superior video performance and ultra-low power in a miniature size for high screen-to-body ratio designs. The sensor combines smaller pixel size and high resolution in the smallest form factor, enabling the most vivid quality video and image capabilities. The sensor offers 60 frames per second (fps) and excellent pixel performance in the thinnest 3 mm module Y size for high screen-to-body ratio designs.

Built on OmniVision's PureCel®Plus-S stacked die technology, the OV02C enables high functionality in the smallest die size. This next-generation pixel technology also provides higher color fidelity and excellent low light

sensitivity, along with a high signal-to-noise ratio of 37.5 dB for crisper images. Additionally, PureCel®Plus-S provides higher full well capacity, zero blooming and lower power consumption.

The OV02C's "Always On" feature senses user presence in ultra-low-power mode and the system can be locked and woken up touchlessly, extending the lifetime of the battery. The OV02C also supports multi-camera synchronization and multi-frame HDR at 30 fps real time video streaming.

Find out more at [www.ovt.com](http://www.ovt.com).



**Omni****Vision**

## Applications

- Notebooks/PC
- Tablets, Detachables, and 2-in-1s
- Wearables
- Smartphones and Feature Phones

## Product Features

- 1.116  $\mu\text{m} \times 1.116 \mu\text{m}$  pixel
- optical size of 1/7.25"
- 34° CRA
- 2MP at 60 fps
- programmable controls for:
  - frame rate
  - mirror and flip
  - cropping
  - windowing
- supports image sizes:
  - 2MP (1920x1080)
  - 720p (1280x720)
  - VGA (640x480), and more
- support for output formats:
  - 8-bit or 10-bit RGB RAW
  - two-wire serial bus control (SCCB)
  - MIPI serial output interface (1-lane or 2-lane) / 2-wire serial output
  - two on-chip phase lock loops (PLLs)
  - 2x binning support
  - image quality controls:
    - defect pixel correction
    - automatic black level calibration
  - suitable for module size of 4 mm x 3.5 mm x 2 mm

# OV02C




## Ordering Information

- OV02C10-GA5A-001A-Z (color, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer)
- OV02C1B-A20A-001A-Z (b&w, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer)
- OV02C10-A20A-001A-Z (color, lead-free) 20-pin CSP
- OV02C1B-A20A-001A-Z (b&w, lead-free) 20-pin CSP

## Technical Specifications


- **active array size:** 1920 x 1080
- **maximum image transfer rate:**
  - 2MP (1920x1080): 60 fps
  - 2x2 binning RGB (640x480): 60 fps
  - 2x2 binning b&w (640x480): 60 fps
- **power supply:**
  - analog: 2.7 - 3.0V (2.8V nominal)
  - core: 1.14 - 1.26V (1.2V nominal)
  - I/O: 1.7 - 1.9V (1.8V nominal)
- **power requirements:**
  - active: 82.2 mW
  - standby: 0.5 mA
  - XSHUTDN: 2  $\mu\text{A}$
- **output interfaces:**
  - 1-lane or 2-lane MIPI serial output / 1-lane 2-wire serial interface
- **temperature range:**
  - operating: -30°C to +85°C junction temperature
  - stable: 0°C to +60°C junction temperature
- **output formats:**
  - 8/10-bit RGB RAW MIPI, 8-bit in 2-wire serial interface
- **lens size:** 1/7.25"
- **lens chief ray angle:** 34° non-linear
- **shutter:** rolling shutter
- **pixel size:** 1.116  $\mu\text{m} \times 1.116 \mu\text{m}$
- **image area:** 2160.576  $\mu\text{m} \times 1223.136 \mu\text{m}$

## Functional Block Diagram

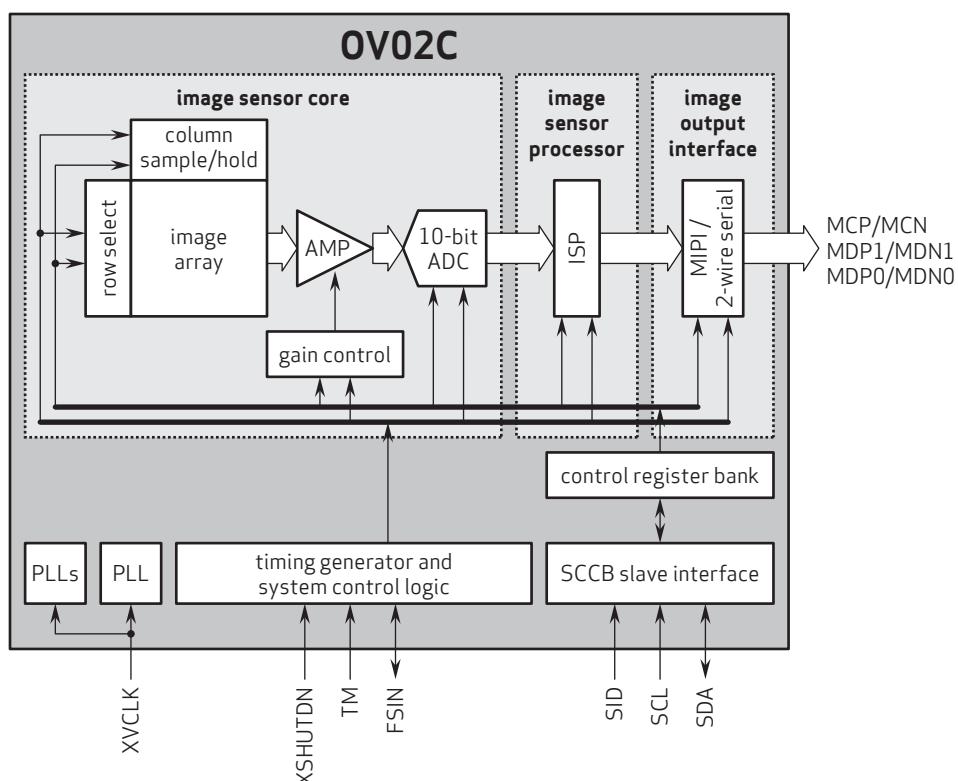


# 0.4 mm Pitch, 0.9 mm Height, Board-to-Board / Board-to-FPC Connectors

## DF30 Series

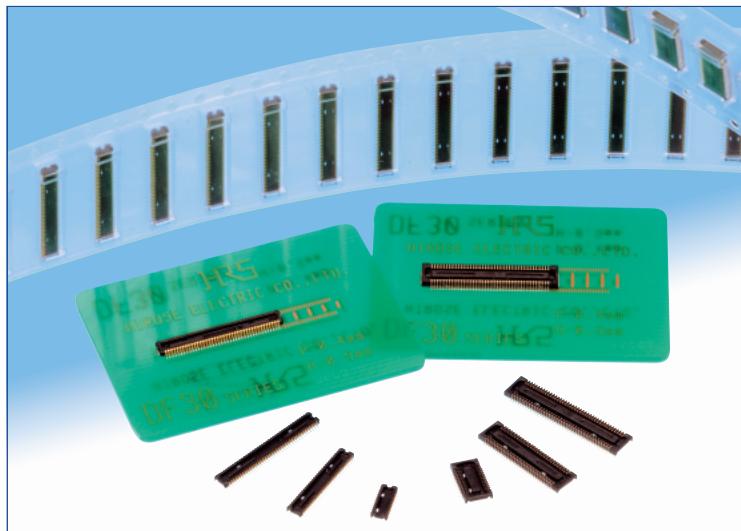

Extremely small size

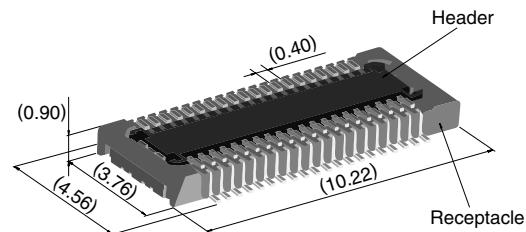

40 positions shown

### Overview

Continuous miniaturization and increased component density on PCB created demand for extremely low profile connectors. This series is addition of a new extremely low profile connectors to Hirose's wide range of high reliability board-to-board/board-to-FPC connection solutions.

### Features

#### 1. Contact reliability

Concentration of the contact's normal forces at the single point assures good contact wipe and electrical reliability, while confirming the fully mated condition with a definite tactile click.

#### 2. Self alignment

Recognizing the difficulties of mating extremely small connectors in limited spaces the connectors will self align in horizontal axis within 0.3 mm.

#### 3. Automatic board placement

Packaged on tape-and-reel the plug and headers have sufficiently large flat areas to allow pick-up with vacuum nozzles of automatic placement equipment.

#### 4. Variety of contact positions and styles


Available in standard contact positions of: 20, 22, 24, 30, 34, 40, 50, 60, 70 and 80 with and without metal fittings. Addition of metal fittings does not affect external dimensions of the connectors.

Smaller contact positions are also available.


#### 5. Support for continuity test connector

Connectors which have increased insertion and removal durability are available for continuity tests. Contact your Hirose sales representative for details.

- Low profile
- Increased mated retention
- High contact reliability

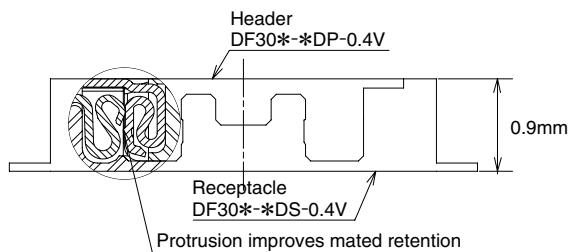

### Self alignment

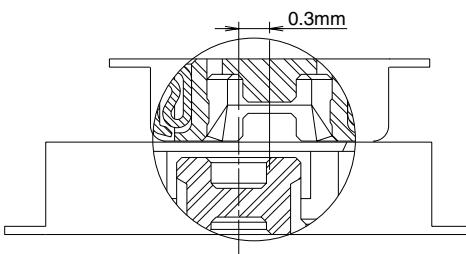

### Applications

Cellular phones, PDA's, mobile computers, digital cameras, digital video cameras, and other devices demanding high reliability connections in extremely limited spaces.

## ■Product Specifications

Rating	Rated current 0.3A Rated voltage 30V AC	Operating temperature range : -35°C to 85°C (Note 1) Operating humidity range : Relative humidity 20% to 80%	Storage temperature range -10°C to 60°C (Note 2) Storage humidity range Relative humidity 40% to 70% (Note 2)
--------	--	---	--

Item	Specification	Conditions
1. Insulation resistance	50 MΩ min.	100V DC
2. Withstanding voltage	No flashover or insulation breakdown.	100V AC / one minute
3. Contact resistance	100 mΩ max.	100 mA
4. Vibration	No electrical discontinuity of 1 μs or more	Frequency: 10 to 55 Hz, single amplitude of 0.75mm, 2 hours, 3 axis
5. Humidity	Contact resistance: 100 mΩ max. Insulation resistance: 25 MΩ min.	96 hours at temperature of 40°C±2°C and RH of 90% to 95%
6. Temperature cycle	Contact resistance: 100 mΩ max. Insulation resistance: 50 MΩ min.	Temperature: -55°C→+5°C to +35°C→+85°C→+5°C to +35°C Duration: 30→10→30→10(Minutes) 5 cycles
7. Durability (insertions/withdrawals)	Contact resistance: 100 mΩ max.	50 cycles(Connector for conductivity tests: 500 cycles)
8. Resistance to soldering heat	No deformation of components affecting performance.	Reflow: At the recommended temperature profile Manual soldering: 300°C for 3 seconds

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating temperature range and humidity range covers non-conducting condition of installed connectors in storage, shipment or during transportation.

## ■Materials and Finishes

Connectors	Component	Material	Finish	Remarks
Receptacles and Headers	Insulator	LCP	Color : Black	UL94V-0
	Contacts	Phosphor bronze	Gold plated	_____
	Metal fittings	Phosphor bronze	Tin-copper plated	_____



## ■Ordering information

### ●Receptacles and Headers


**DF30 FC - \* DS - 0.4 V (\*\*)**

<b>①</b> Series name: DF30	<b>⑤</b> Contact pitch: 0.4 mm
<b>②</b> Configuration FB: With metal fittings, without bosses FC: Without metal fittings, without bosses CJ: Connector for conductivity tests	<b>⑥</b> Termination section V: Straight SMT
<b>③</b> Number of positions: 20, 22, 24, 30, 34, 40, 50, 60, 70, 80	<b>⑦</b> Packaging (81): Embossed tape packaging (5,000 pieces per reel) (82): Embossed tape packaging (1,000 pieces per reel)
<b>④</b> Connector type DS: Double row receptacle DP: Double row header	

## ■ Receptacles (without metal fittings)

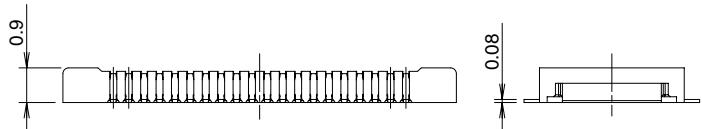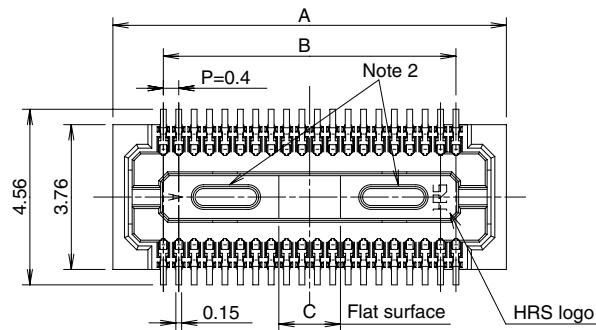

## ◆ Recommended PCB mounting pattern

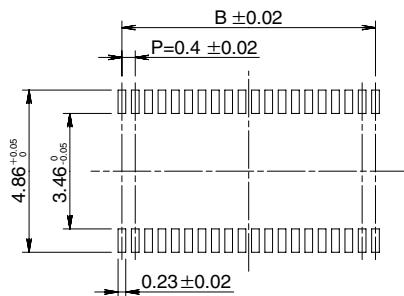

Recommended solder paste thickness: 120  $\mu\text{m}$

[Specification number] -**, (**)
(81): Embossed tape packaging (5,000 pieces per reel)

\* Tolerances non- accumulative.

Unit: mm

Part Number	CL No.	Number of contacts	A	B	C
DF30FC-20DS-0.4V(**)	CL684-1109-8-**	20	6.22	3.6	1.2
DF30FC-22DS-0.4V(**)	CL684-1110-7-**	22	6.62	4.0	1.2
DF30FC-24DS-0.4V(**)	CL684-1111-0-**	24	7.02	4.4	1.2
DF30FC-30DS-0.4V(**)	CL684-1112-2-**	30	8.22	5.6	1.2
DF30FC-34DS-0.4V(**)	CL684-1113-5-**	34	9.02	6.4	1.36
DF30FC-40DS-0.4V(**)	CL684-1078-6-**	40	10.22	7.6	1.6
DF30FC-50DS-0.4V(**)	CL684-1114-8-**	50	12.22	9.6	2.0
DF30FC-60DS-0.4V(**)	CL684-1082-3-**	60	14.22	11.6	2.4
DF30FC-70DS-0.4V(**)	CL684-1115-0-**	70	16.22	13.6	2.8
DF30FC-80DS-0.4V(**)	CL684-1116-3-**	80	18.22	15.6	3.2

Note 1: Order by number of reels.

Note 2: Receptacles with 24 or fewer contacts positions will not have recessed areas.

## Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

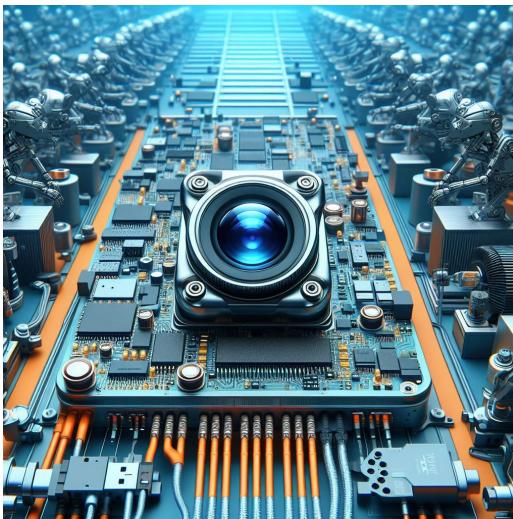

Machine Vision



Agricultural Monitor

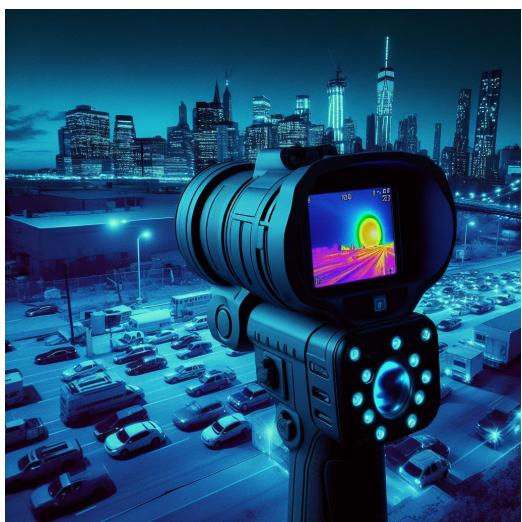

Night Vision Security




Drone and Sports Eagle Eyes



Interactive Pet Camera

## Cameras Applications

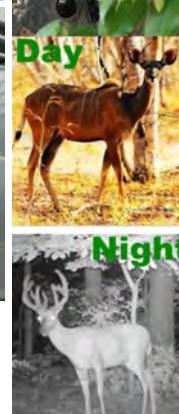

## Camera Module Pinout Definition Reference Chart

Pin Signal	Description
DGND GND	ground for digital circuit
AGND	ground for analog circuit
PCLK DCK	DVP PCLK output
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor
MCLK XVCLK XCLK INCK	system input clock
RESET RST	reset active low with internal pull-up resistor
NC NULL	no connect
SDA SIO_D SIOD	SCCB data
SCL SIO_C SIOC	SCCB input clock
VSYNC XVS FSYNC	DVP VSYNC output
HREF XHS	DVP HREF output
DOVDD	power for I/O circuit
AFVDD	power for VCM circuit
AVDD	power for analog circuit
DVDD	power for digital circuit
STROBE FSTROBE	strobe output
FSIN	synchronize the VSYNC signal from the other sensor
SID	SCCB last bit ID input
ILPWM	mechanical shutter output indicator
FREX	frame exposure / mechanical shutter
GPIO	general purpose inputs
SLASEL	I2C slave address select
AFEN	CEN chip enable active high on VCM driver IC
<b>MIPI Interface</b>	
MDN0 DN0 MD0N DATA_N DMO1N	MIPI 1st data lane negative output
MDP0 DP0 MD0P DATA_P DMO1P	MIPI 1st data lane positive output
MDN1 DN1 MD1N DATA2_N DMO2N	MIPI 2nd data lane negative output
MDP1 DP1 MD1P DATA2_P DMO2P	MIPI 2nd data lane positive output
MDN2 DN2 MD2N DATA3_N DMO3N	MIPI 3rd data lane negative output
MDP2 DP2 MD2P DATA3_P DMO3P	MIPI 3rd data lane positive output
MDN3 DN3 MD3N DATA4_N DMO4N	MIPI 4th data lane negative output
MDP3 DP3 MD3P DATA4_P DMO4P	MIPI 4th data lane positive output
MCN CLKN CLK_N DCKN	MIPI clock negative output
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output
<b>DVP Parallel Interface</b>	
D0 DO0 Y0	DVP data output port 0
D1 DO1 Y1	DVP data output port 1
D2 DO2 Y2	DVP data output port 2
D3 DO3 Y3	DVP data output port 3
D4 DO4 Y4	DVP data output port 4
D5 DO5 Y5	DVP data output port 5
D6 DO6 Y6	DVP data output port 6
D7 DO7 Y7	DVP data output port 7
D8 DO8 Y8	DVP data output port 8
D9 DO9 Y9	DVP data output port 9
D10 DO10 Y10	DVP data output port 10
D11 DO11 Y11	DVP data output port 11

## Camera Reliability Test

Reliability Inspection Item		Testing Method	Acceptance Criteria	
Category	Item			
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	The Naked Eye
		Be Torn/Chopped	The Naked Eye
		Marking	The Naked Eye
	Holder	Scratches	The Naked Eye
		Gap	The Naked Eye
		Screw	The Naked Eye
		Damage	The Naked Eye
	Lens	Scratch	The Naked Eye
		Contamination	The Naked Eye
		Oil Film	The Naked Eye
		Cover Tape	The Naked Eye
Function	Image	No Communication	Test Board
		Bright Pixel	Black Board
		Dark Pixel	White board
		Blurry	The Naked Eye
		No Image	The Naked Eye
		Vertical Line	The Naked Eye
		Horizontal Line	The Naked Eye
		Light Leakage	The Naked Eye
		Blinking Image	The Naked Eye
		Bruise	Inspection Jig
		Resolution	Chart
		Color	The Naked Eye
		Noise	The Naked Eye
		Corner Dark	Less Than 100px By 100px
Dimension	Dimension	Color Resolution	The Naked Eye
		Height	The Naked Eye
		Width	The Naked Eye
		Length	The Naked Eye
		Overall	The Naked Eye




# CMOS CAMERA MODULES

your *BEST* camera module partner

## KLT Package Solutions

KLT Camera Module

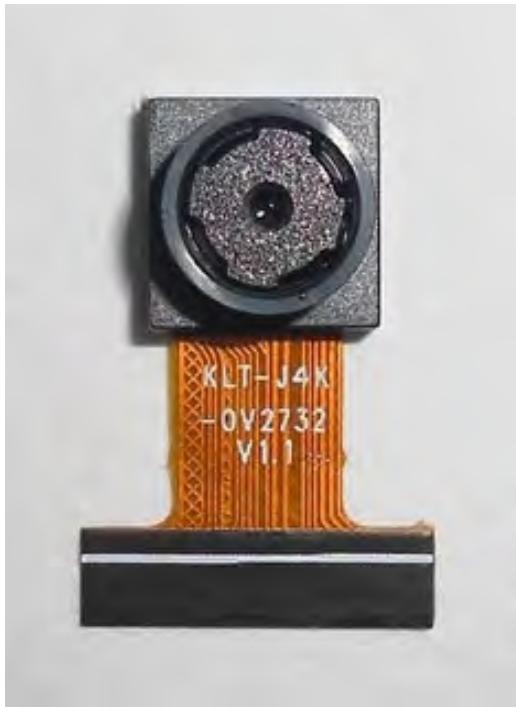


Complete with Lens Protection Film



Tray with Grid and Space




Place Cameras on the Tray

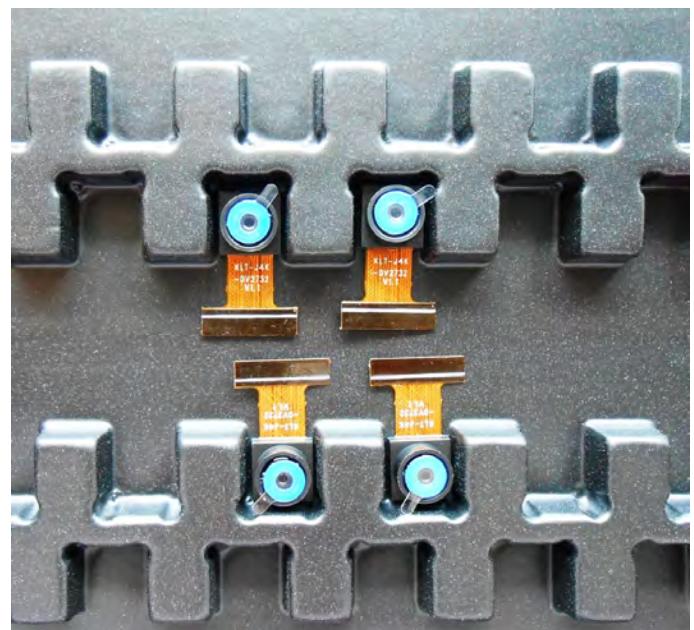

**Camera Modules Package Solution**

Full Tray of Cameras

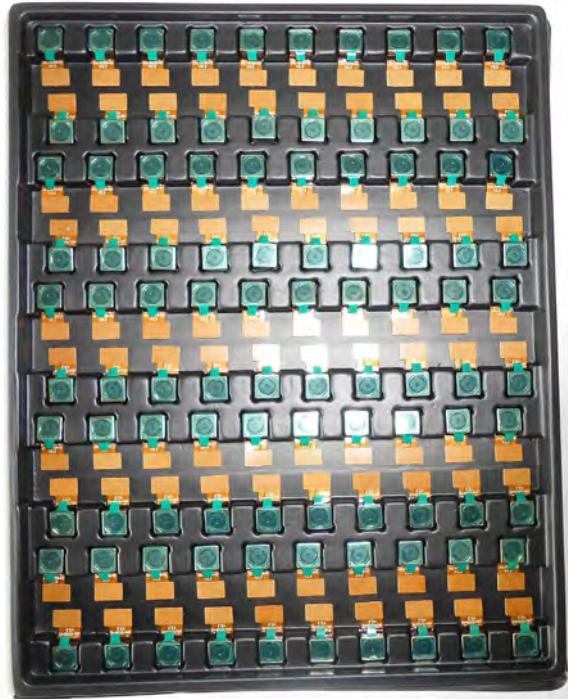


Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

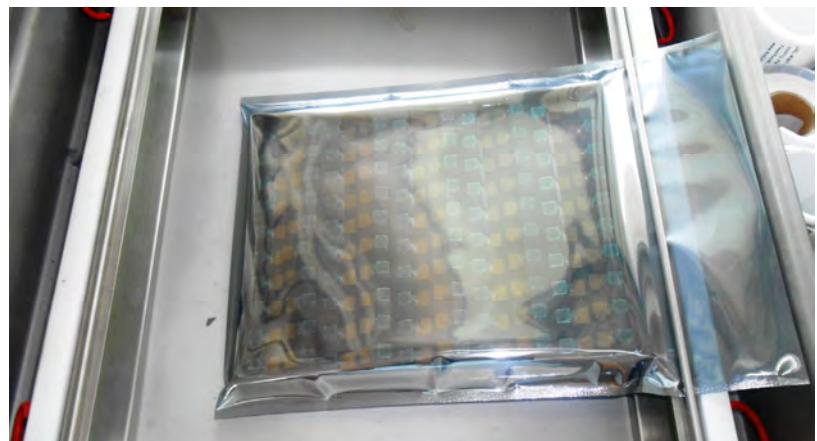



# CMOS CAMERA MODULES

your *BEST* camera module partner



## Camera Modules Package Solution

### Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



[www.KaiLapTech.com](http://www.KaiLapTech.com) [sales@KaiLapTech.com](mailto:sales@KaiLapTech.com) Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

**Large Order Package Solution**

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box





# CMOS CAMERA MODULES

*your BEST camera module partner*

## Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



[www.KaiLapTech.com](http://www.KaiLapTech.com) [sales@KaiLapTech.com](mailto:sales@KaiLapTech.com) Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



# CMOS CAMERA MODULES

your *BEST* camera module partner

## Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



### Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



[www.KaiLapTech.com](http://www.KaiLapTech.com) [sales@KaiLapTech.com](mailto:sales@KaiLapTech.com) Tel: (852) 6908 1256 Fax: (852) 3017 6778

## Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



### Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution





## Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel



The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




**Company Kai Lap Technologies (KLT)**

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

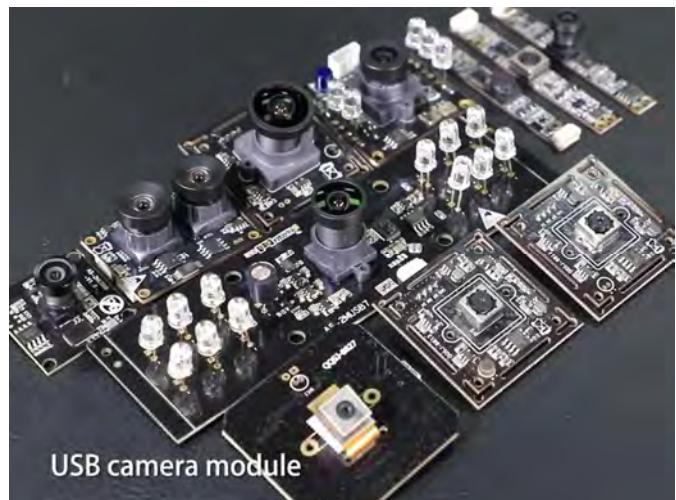**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, [www.KaiLapTech.com](http://www.KaiLapTech.com). Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.



## KLT Strength

## Powerful Factory



## Professional Service



## Promised Delivery

