

KLT-PC5693 V2.4**5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module**

KLT-PC5693 V2.4 is a 5MP Auto Focus USB camera module based on 1/4" OV5693 image sensor. Auto Focus captures images clearly at different distances. It delivers high-speed, 2K resolution ultra sharp image.

The camera has a dedicated, high-performance auto focus function providing best-in-class image and video output. This camera module is ideal solution for drones, automotive, agriculture farming, medical equipment, and traffic monitoring.

Key Features

- 2592 x 1944 OmniVision OV5693 sensor
- High speed USB 2.0 Plug and Play
- MJPG and YUV2 output format
- Low power consumption
- Compact size
- UVC compliant to Windows, Linux, OS with UVC driver
- USB OTG (On-The-Go) support


KLT-PC5693 V2.4**5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module**

Camera Module No.	KLT-PC5693 V2.4
Resolution	5MP
Image Sensor	OV5693
Sensor Type	1/4"
Pixel Size	1.4 um x 1.4 um
EFL	3.20 mm
F.NO	2.80
Pixel	2592 x 1944
View Angle	70.0°(DFOV) 58.6°(HFOV) 45.3°(VFOV)
Lens Dimensions	8.50 x 8.50 x 5.65 mm
Module Type	Auto Focus
Interface	USB 2.0
Output Format	MJPEG / YUV2
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure
Audio	Yes
Input Voltage	DC 5V
Working Current	Max 500mA
PCB Size	70.00 x 8.50 mm
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam
Lens Type	650nm IR Cut
Operating Temperature	-30°C to +70°C
USB Cable	USB Cable

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi

**KLT-PC5693 V2.4****5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module**

Top View

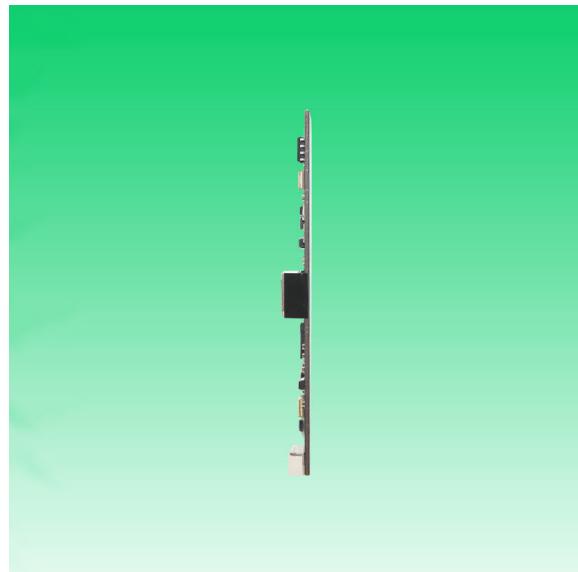

Side View



Bottom View




Mating Connector

KLT-PC5693 V2.4

5MP OmniVision OV5693 Auto Focus USB 2.0 Camera Module

FORMAT	RESOLUTION	FRAME RATE
		USB 2.0
MJPG	640 x 480 (VGA)	15 FPS
	1280 x 720 (720P)	15 FPS
	1920 x 1080 (1080P)	15 FPS
	2592 x 1944 (5MP)	15 FPS
YUV2	640 x 480 (VGA)	15 FPS
	1280 x 720 (720P)	10 FPS
	1920 x 1080 (1080P)	5 FPS
	2592 x 1944 (5MP)	3 FPS




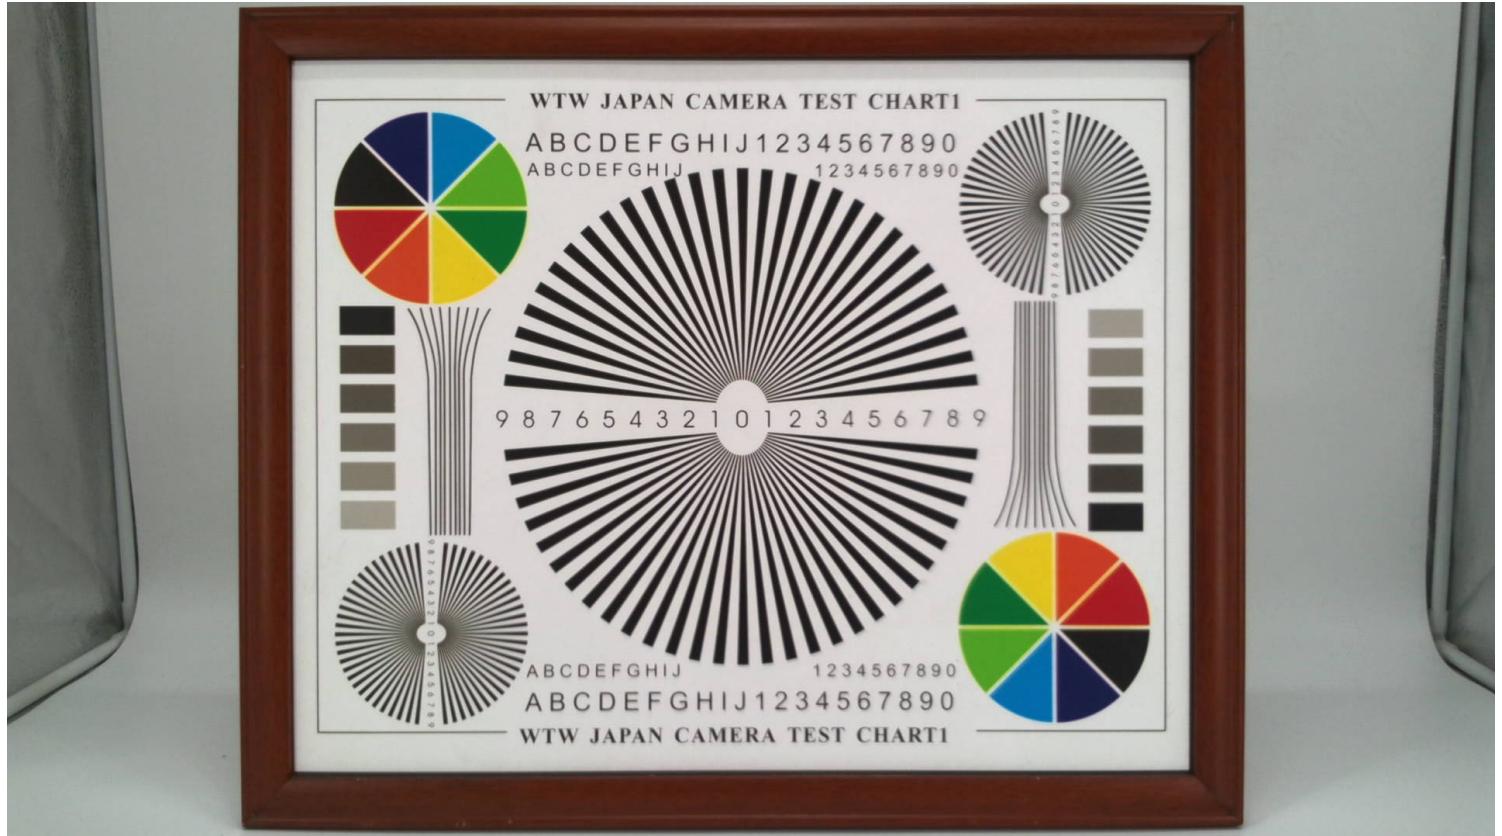

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

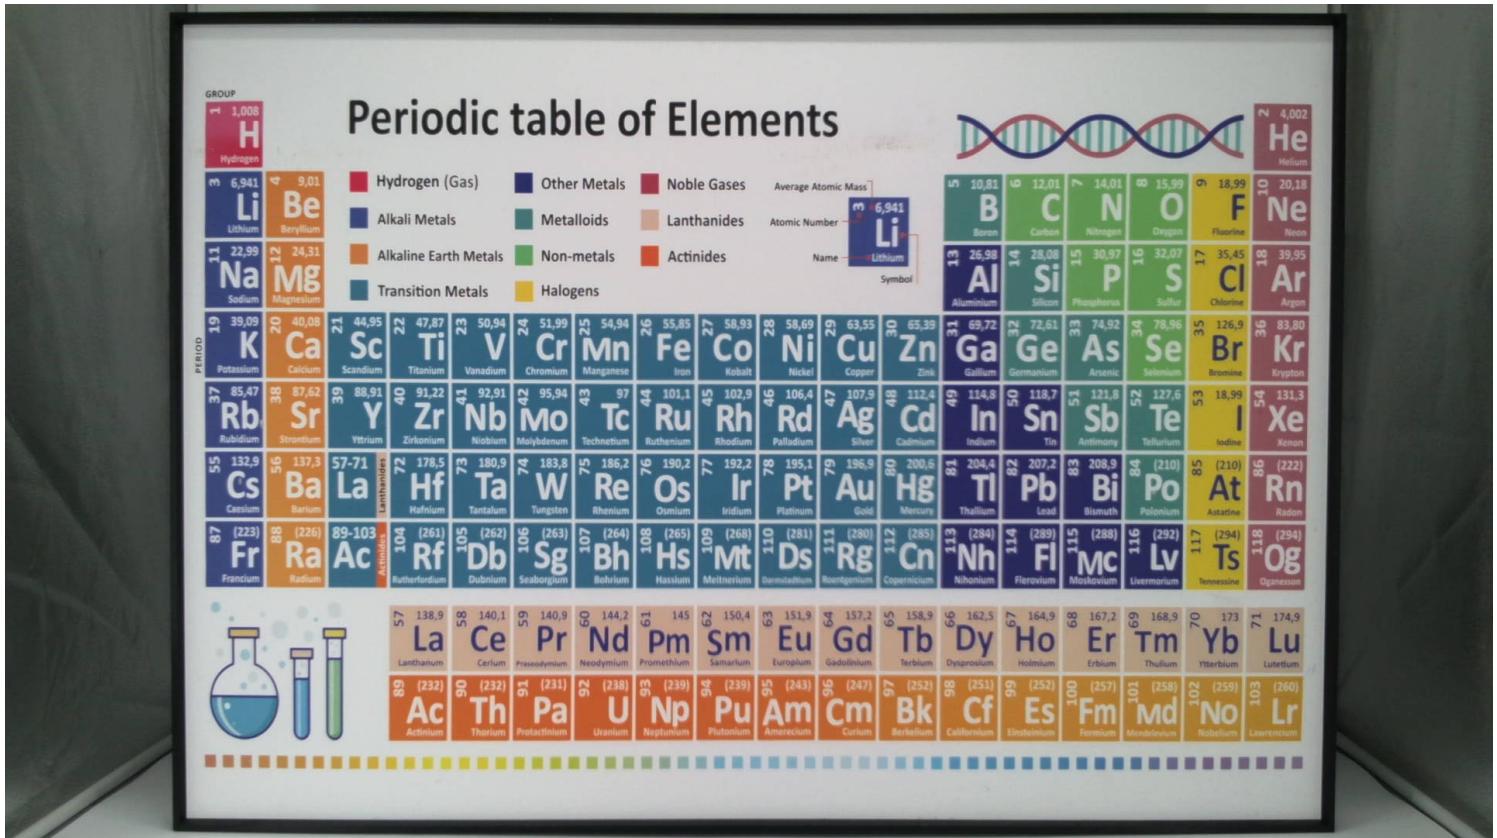




7 m	23 m	50,94 Vanadium	24 m	51,99 Chromium	25 m	54,94 Manganese	26 m	55,85 Iron	27 m	58,93 Kobalt	28 m	58,69 Nickel	29 m	63,55 Copper	30 m	65,39 Zink	31 m	69,72 Gallium	32 m	72,61 Germanium	33 m	74,92 Arsenic	34 S
22 m	41 m	92,91 Niobium	42 m	95,94 Molybdenum	43 m	97 Technetium	44 m	101,1 Ruthenium	45 m	102,9 Rhodium	46 m	106,4 Palladium	47 m	107,9 Rd	48 m	112,4 Silver	49 m	114,8 Cadmium	50 m	118,7 Indium	51 m	121,8 Tin	52 m
5 f	73 m	180,9 Tantalum	74 m	183,8 Tungsten	75 m	186,2 Rhenium	76 m	190,2 Osmium	77 m	192,2 Iridium	78 m	195,1 Platinum	79 m	196,9 Gold	80 m	200,6 Mercury	81 m	204,4 Thallium	82 m	207,2 Lead	83 m	208,9 Bismuth	84 P
1 f	105 m	(262) Dubnium	106 m	(263) Seaborgium	107 m	(264) Bohrium	108 m	(265) Hassium	109 m	(268) Meitnerium	110 m	(281) Darmstadtium	111 m	(280) Roentgenium	112 m	(285) Copernicium	113 m	(284) Nihonium	114 m	(289) Flerovium	115 m	(288) Moskovium	116 m
5 a	58 m	140,1 Cerium	59 m	140,9 Praseodymium	60 m	144,2 Neodymium	61 m	145 Promethium	62 m	150,4 Samarium	63 m	151,9 Europium	64 m	157,2 Gadolinium	65 m	158,9 Terbium	66 m	162,5 Dysprosium	67 m	164,9 Holmium	68 m	167,2 Erbium	69 m
2 a	90 m	(232) Thorium	91 m	(231) Protactinium	92 m	(238) Radium	93 m	(239) Actinium	94 m	(239) Rutherfordium	95 m	(243) Amber	96 m	(247) Curium	97 m	(252) Berkelium	98 m	(251) Californium	99 m	(252) Einsteinium	100 m	(257) Fermium	101 m


www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778




www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

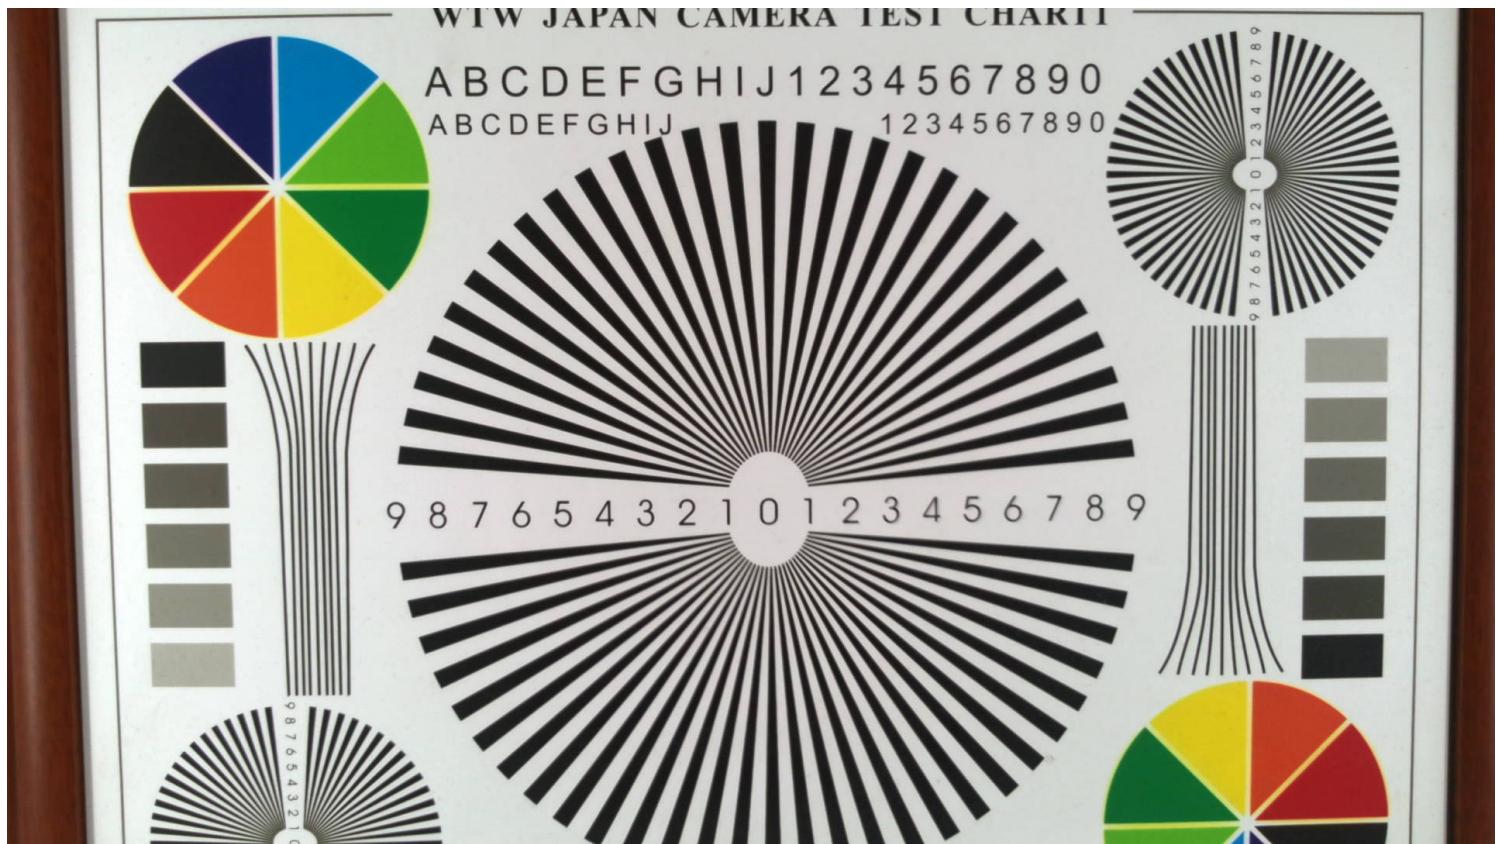

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

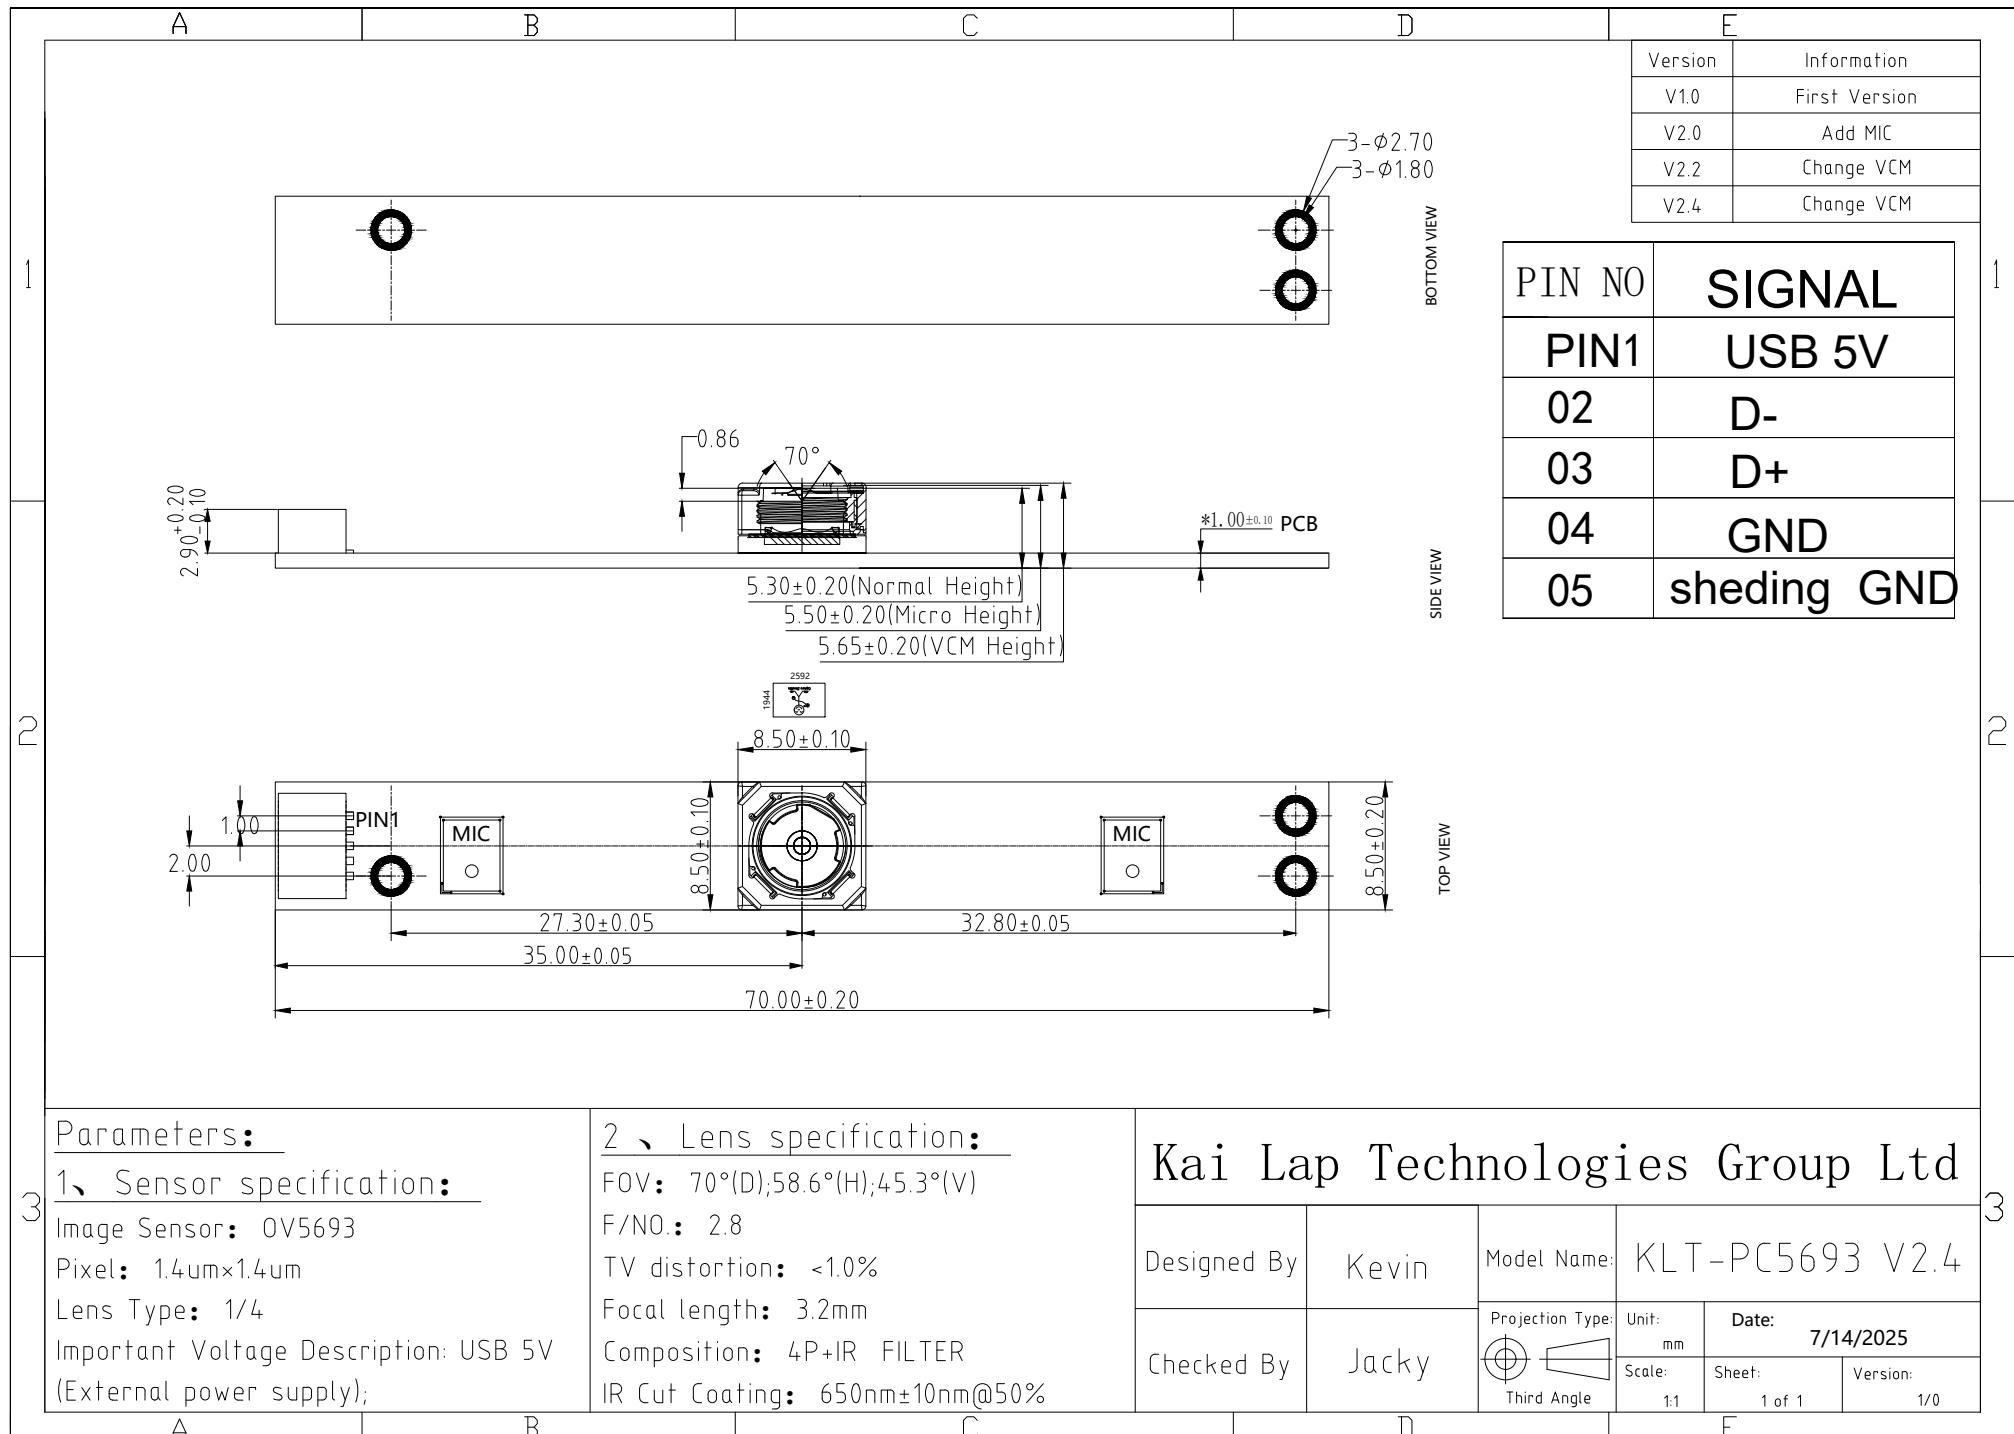



OV5693 5-megapixel product brief



available in
a lead-free
package

High-Performance 5-Megapixel Image Sensor for Front-Facing Cameras in Flagship Smartphones and Tablets

The OV5693 is OmniVision's highest performance 1/4-inch, 5-megapixel image sensor, delivering DSC-quality imaging and low-light performance as well as full 1080p high-definition video recording at 30 frames per second (fps). Using OmniVision's proprietary 1.4-micron OmniBSI-2™ pixel architecture, the OV5693 provides best-in-class low-light performance and image quality in a slim camera module. This makes the OV5693 an ideal camera solution for slim flagship smartphones and tablets, providing exceptional 5-megapixel "selfie" images and high-quality 1080p video.

Leveraging OmniVision's second-generation industry-leading backside illumination pixel technology, the OV5693 offers full resolution 5-megapixel images at 30 fps, an integrated scaler, and 2x2 binning

functionality with re-sampling filter. The scaler enables electronic image stabilization, while maintaining full field-of-view in both 720p and 1080p HD video modes. The 2x2 binning functionality, which features a post-binning re-sampling filter, further increases the sensor's sensitivity, while minimizing spatial artifacts and removing image artifacts around edges to produce crisp, clean color images.

The sensor features a high-speed 2-lane MIPI interface running up to 900 Mbps per lane and fits into an industry standard module size of 8.5 x 8.5 mm with a z-height of 4.2 mm for an autofocus module.

Find out more at www.ovt.com.




Omni*Vision*

Applications

- Cellular and Mobile Phones
- Digital Still Cameras (DSC)
- Digital Video Camcorders (DVC)
- PC Multimedia
- 3D Cameras

OV5693



Product Features

- automatic black level calibration (ABLC)
- programmable controls for frame rate, mirror and flip, cropping, windowing, and scaling
- image quality controls: lens correction and defective pixel canceling
- supports output formats: 10-bit RAW RGB (MIPI)
- supports horizontal and vertical subsampling
- supports images sizes: 5MP, EIS1080p, 1080p, 720p, VGA, QVGA
- fast mode switching
- supports 3D applications
- support 2x2 binning, full scalar
- standard serial SCCB interface
- up to 2-lane MIPI serial output interface
- embedded 512 bytes one-time programmable (OTP) memory for part identification, etc.
- two on-chip phase lock loop (PLL)
- programmable I/O drive capability
- built-in 1.2V regulator for core
- built-in temperature sensor
- supports alternate row HDR timing


Ordering Information

- OV05693-G06H-3A
(color, chip probing, 180 μ m backgrinding, reconstructed 8" wafer with good die)
- OV05693-G36H-3A
(color, chip probing, 180 μ m backgrinding, reconstructed 12" wafer with good die)

Product Specifications

- **active array size:** 2592 x 1944
- **power supply:**
 - core: 1.16 - 1.3V (1.2V typical)
 - analog: 2.6 - 3.0V
 - I/O: 1.7 - 3.0V
- **power requirements:**
 - active: 239 mW
 - XSHUTDN: 1 μ W
- **temperature range:**
 - operating: -30°C to +70°C junction temperature
 - stable image: 0°C to +50°C junction temperature
- **output formats:** 10-bit RGB RAW
- **lens size:** 1/4"
- **lens chief ray angle:** 29.7° non-linear
- **input clock frequency:** 6 - 27 MHz
- **max S/N ratio:** 37.1 dB
- **dynamic range:** 68.0 dB @ 8x gain
- **maximum image transfer rate:**
 - 5MP: 30 fps
 - EIS1080p: 30 fps
 - 1080p: 30 fps
- **sensitivity:** 1000 mV/lux-sec
- **scan mode:** progressive
- **pixel size:** 1.4 μ m x 1.4 μ m
- **dark current:** 3.3 mV/sec @ 60°C junction temperature
- **image area:** 3673.6 μ m x 2738.4 μ m
- **dimensions:**
 - COB: 5350 μ m x 4800 μ m
 - RW: 5400 μ m x 4850 μ m

Functional Block Diagram

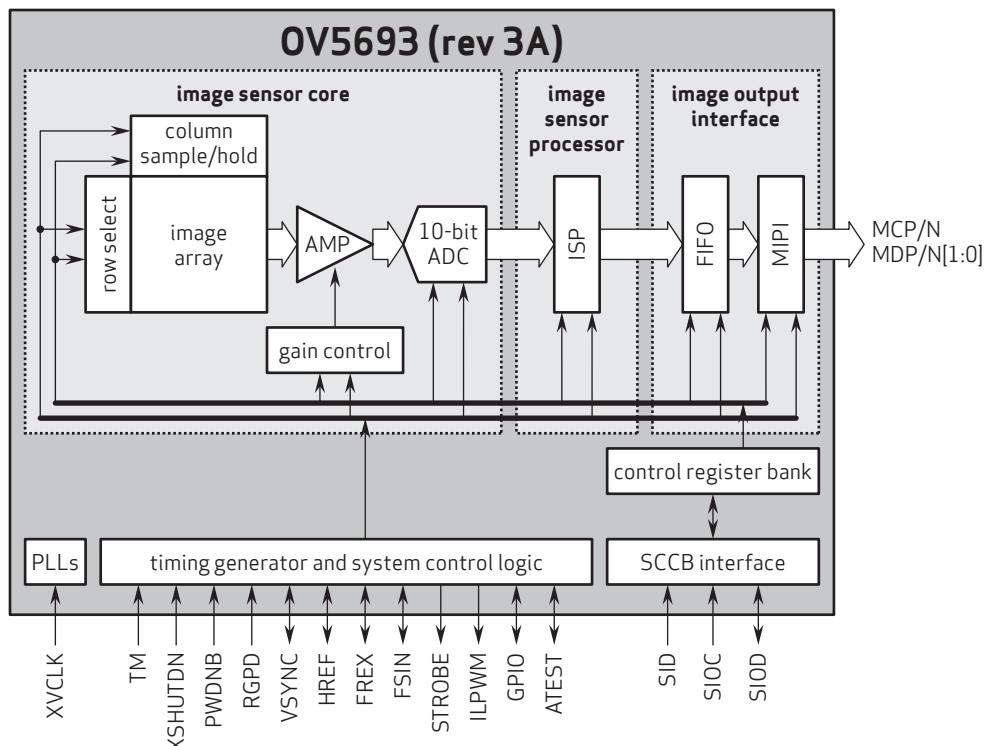

Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

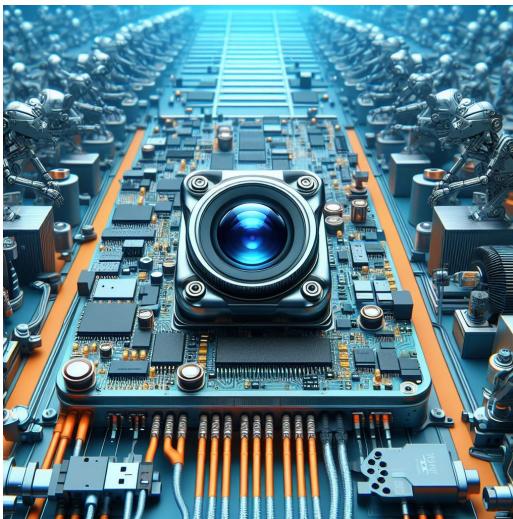

Machine Vision



Agricultural Monitor

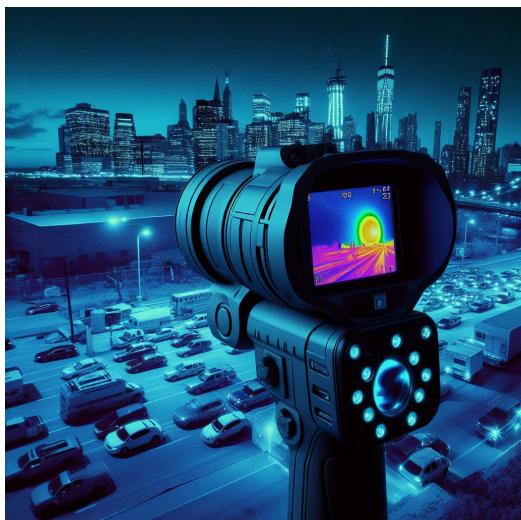

Night Vision Security



Drone and Sports Eagle Eyes



Interactive Pet Camera

Cameras Applications



Camera Reliability Test

Reliability Inspection Item		Testing Method	Acceptance Criteria	
Category	Item			
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	The Naked Eye
		Be Torn/Chopped	The Naked Eye
		Marking	The Naked Eye
	Holder	Scratches	The Naked Eye
		Gap	The Naked Eye
		Screw	The Naked Eye
		Damage	The Naked Eye
	Lens	Scratch	The Naked Eye
		Contamination	The Naked Eye
		Oil Film	The Naked Eye
		Cover Tape	The Naked Eye
Function	Image	No Communication	Test Board
		Bright Pixel	Black Board
		Dark Pixel	White board
		Blurry	The Naked Eye
		No Image	The Naked Eye
		Vertical Line	The Naked Eye
		Horizontal Line	The Naked Eye
		Light Leakage	The Naked Eye
		Blinking Image	The Naked Eye
		Bruise	Inspection Jig
		Resolution	Chart
		Color	The Naked Eye
		Noise	The Naked Eye
		Corner Dark	Less Than 100px By 100px
		Color Resolution	The Naked Eye
Dimension	Dimension	Height	The Naked Eye
		Width	The Naked Eye
		Length	The Naked Eye
		Overall	The Naked Eye




CMOS CAMERA MODULES

your *BEST* camera module partner

KLT Package Solutions

KLT Camera Module

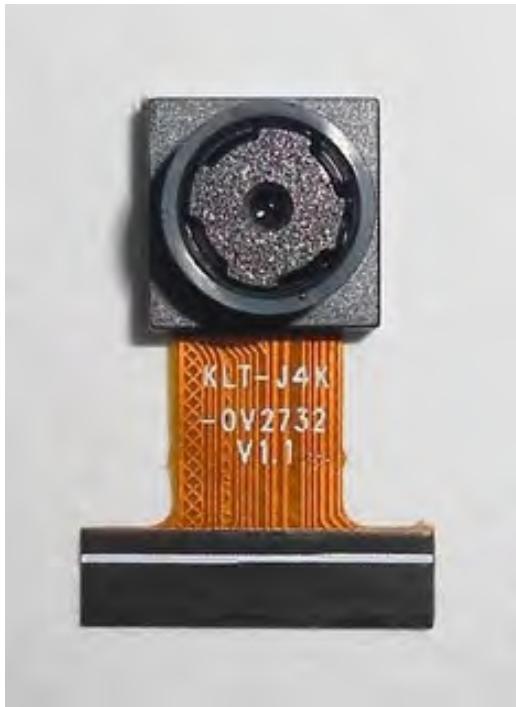


Complete with Lens Protection Film



Tray with Grid and Space



Place Cameras on the Tray

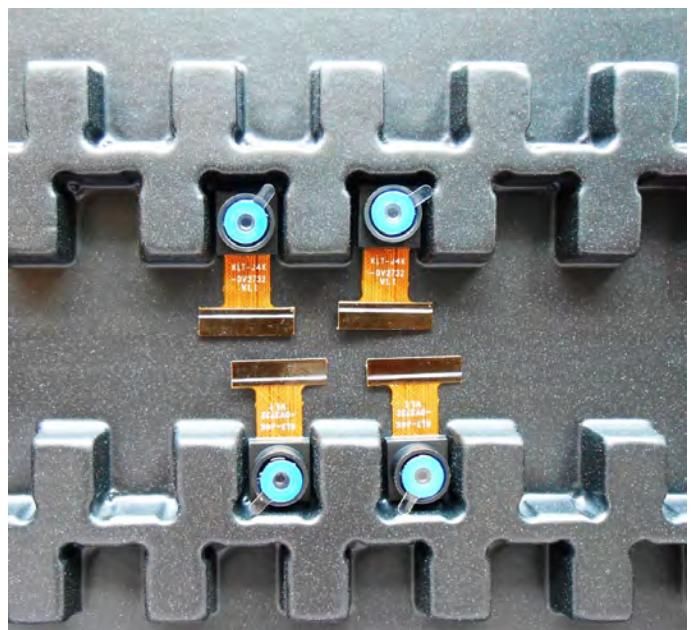

Camera Modules Package Solution

Full Tray of Cameras




Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

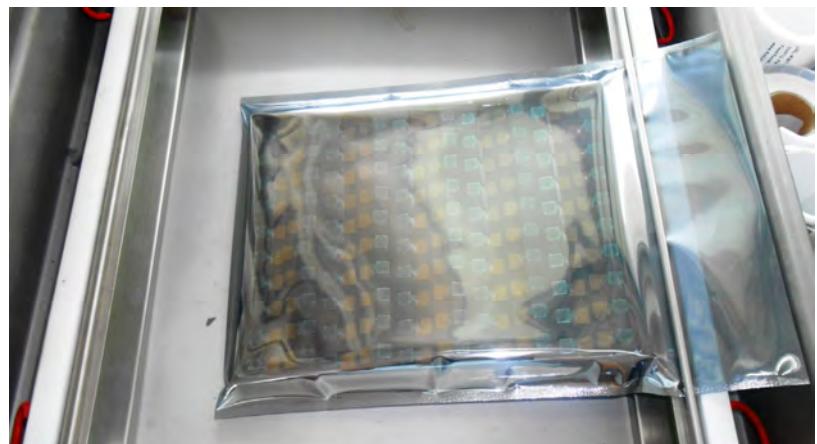



CMOS CAMERA MODULES

your *BEST* camera module partner



Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

Large Order Package Solution

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box





CMOS CAMERA MODULES

your BEST camera module partner

Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your *BEST* camera module partner

Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution





Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel



The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

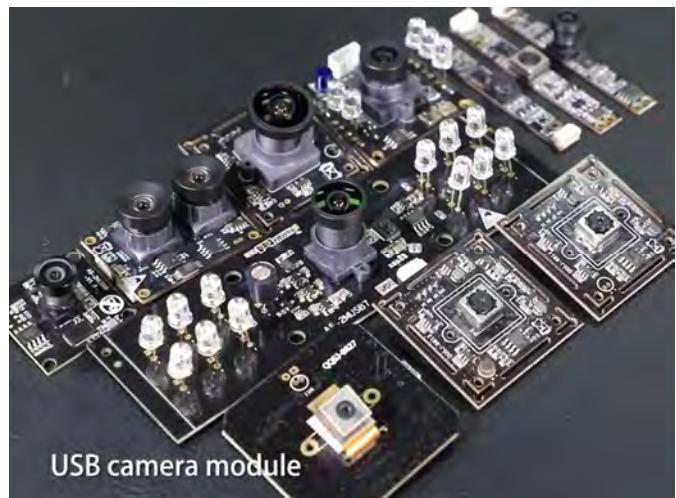**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.



KLT Strength

Powerful Factory



Professional Service



Promised Delivery

