


KLT-Raspberry-Pi-OV5647 V3.0

**5MP OmniVision OV5647 Raspberry Pi MIPI Interface
M12 Fixed Focus Camera Module**




Front View

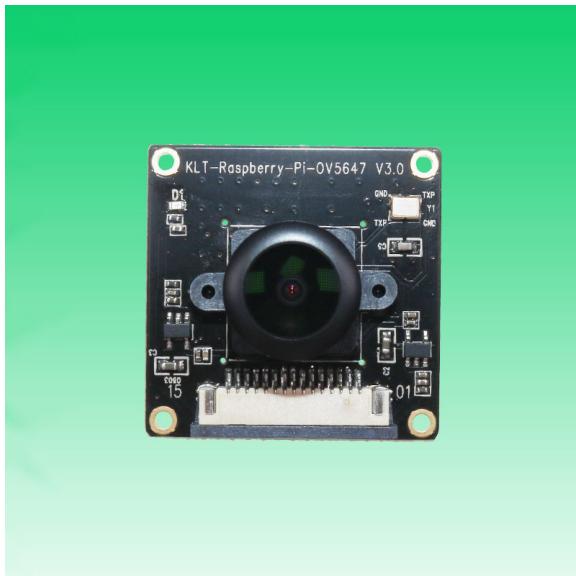

Back View

Specifications

| Camera Module No. | KLT-Raspberry-Pi-OV5647 V3.0 |
|--------------------------|------------------------------|
| Resolution | 5MP |
| Image Sensor | OV5647 |
| Sensor Type | 1/4" |
| Pixel Size | 1.4 um x 1.4 um |
| EFL | 2.15 mm |
| F.NO | 2.35 |
| Pixel | 2592 x 1944 |
| View Angle | 126.0°(DFOV) |
| Lens Dimensions | 13.00 x 13.00 x 15.20 mm |
| Module Size | 32.00 x 32.00 mm |
| Module Type | Fixed Focus |
| Interface | MIPI |
| Auto Focus VCM Driver IC | None |
| Lens Model | KLT-LENS-TRC-4047B1 |
| Lens Type | 650nm IR Cut |
| Operating Temperature | -30°C to +70°C |
| Mating Connector | Raspberry Pi Cable |

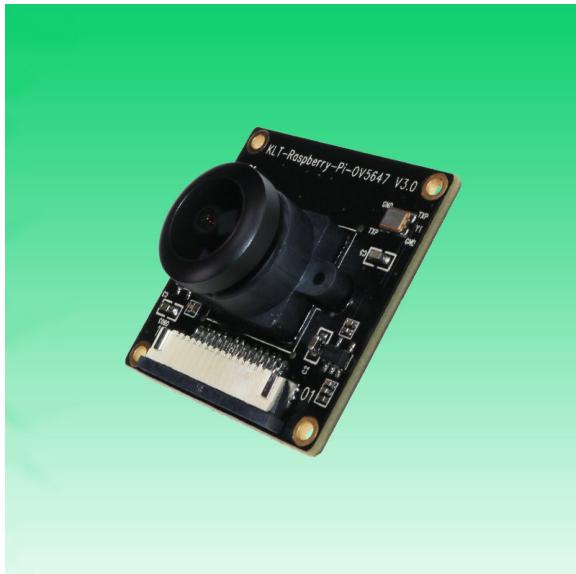**KLT-Raspberry-Pi-OV5647 V3.0****5MP OmniVision OV5647 Raspberry Pi MIPI Interface
M12 Fixed Focus Camera Module**


Top View



Side View



Bottom View

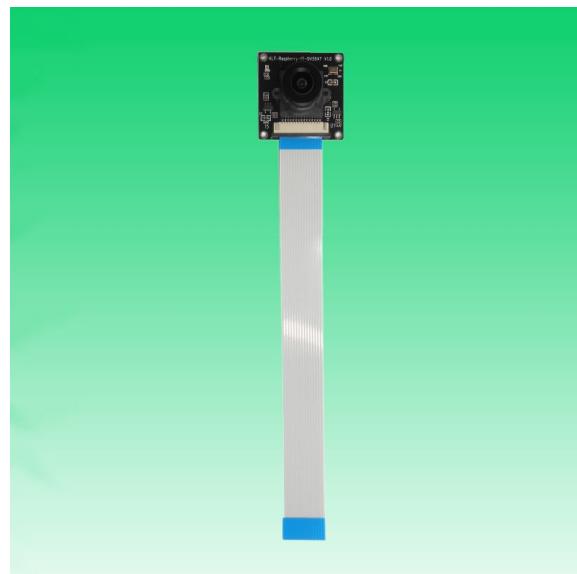

Mating Connector

ROHS

| NO | SIGNAL |
|----|--------|
| 1 | CND |

| | |
|-----|-----|
| 2 | - |
| DNO | GND |

3 DPO

| | |
|-----|-----|
| 5 | 4 |
| DN1 | GND |

6 C

7 GND

88

51 6
END MCP

11 GND

12 MCLK

13 SCL

15 AVDD3.3V

7
(c)

11 of 11

Parameters:

Image Sensor: OV5642

Pixel: 1.4 μ m x 1.4 μ m

Lens Type: 1/4

internal power supply

10

TOP VIEW

32.00±0.10

32.00±0.10

22.00

13.00±0.10

13.00±0.10

16.00

16.00

80.50

15

01

Φ14.0

2592

1944

Output Direction

B

2 、 Lens specification:

FOV: 126°

F/NO.: 2.35

TV distortion: <15.7%

Focal length: 2.15mm

Composition: 5G+IR F

option: DVDD1.5V

IR Cut Coating: 650nm

Information

| Version | Mark | Date |
|---------|------|------------------------|
| V1.0 | PD | First Version |
| V3.0 | ▲ | 2018-03-10 |
| | ▲ | Change lens and holder |

Designation: Kai Lap Technologies Group Ltd

Design By: Kevin

Model Name: KLT-Raspberry-Pi-0V5647 V3.0

Projection Type: Unit: mm

Material: -----

Checked By: Aouly yan

Third Angle

Scale: 1:1

Sheet: 1 of 1

Version: 1/0

PCB

160

14.00

126°

15.20±0.20

9.30

1.0K-FX-nPWB

1.0K-FX-nPWB

28.00

28.00

18.00

2-Φ1.50

4-Φ2.00


SIDE VIEW


BOTTOM VIEW

Kai Lap Technologies Group Ltd

ω

Lens Model: KLT-LENS-TRC-4047B1

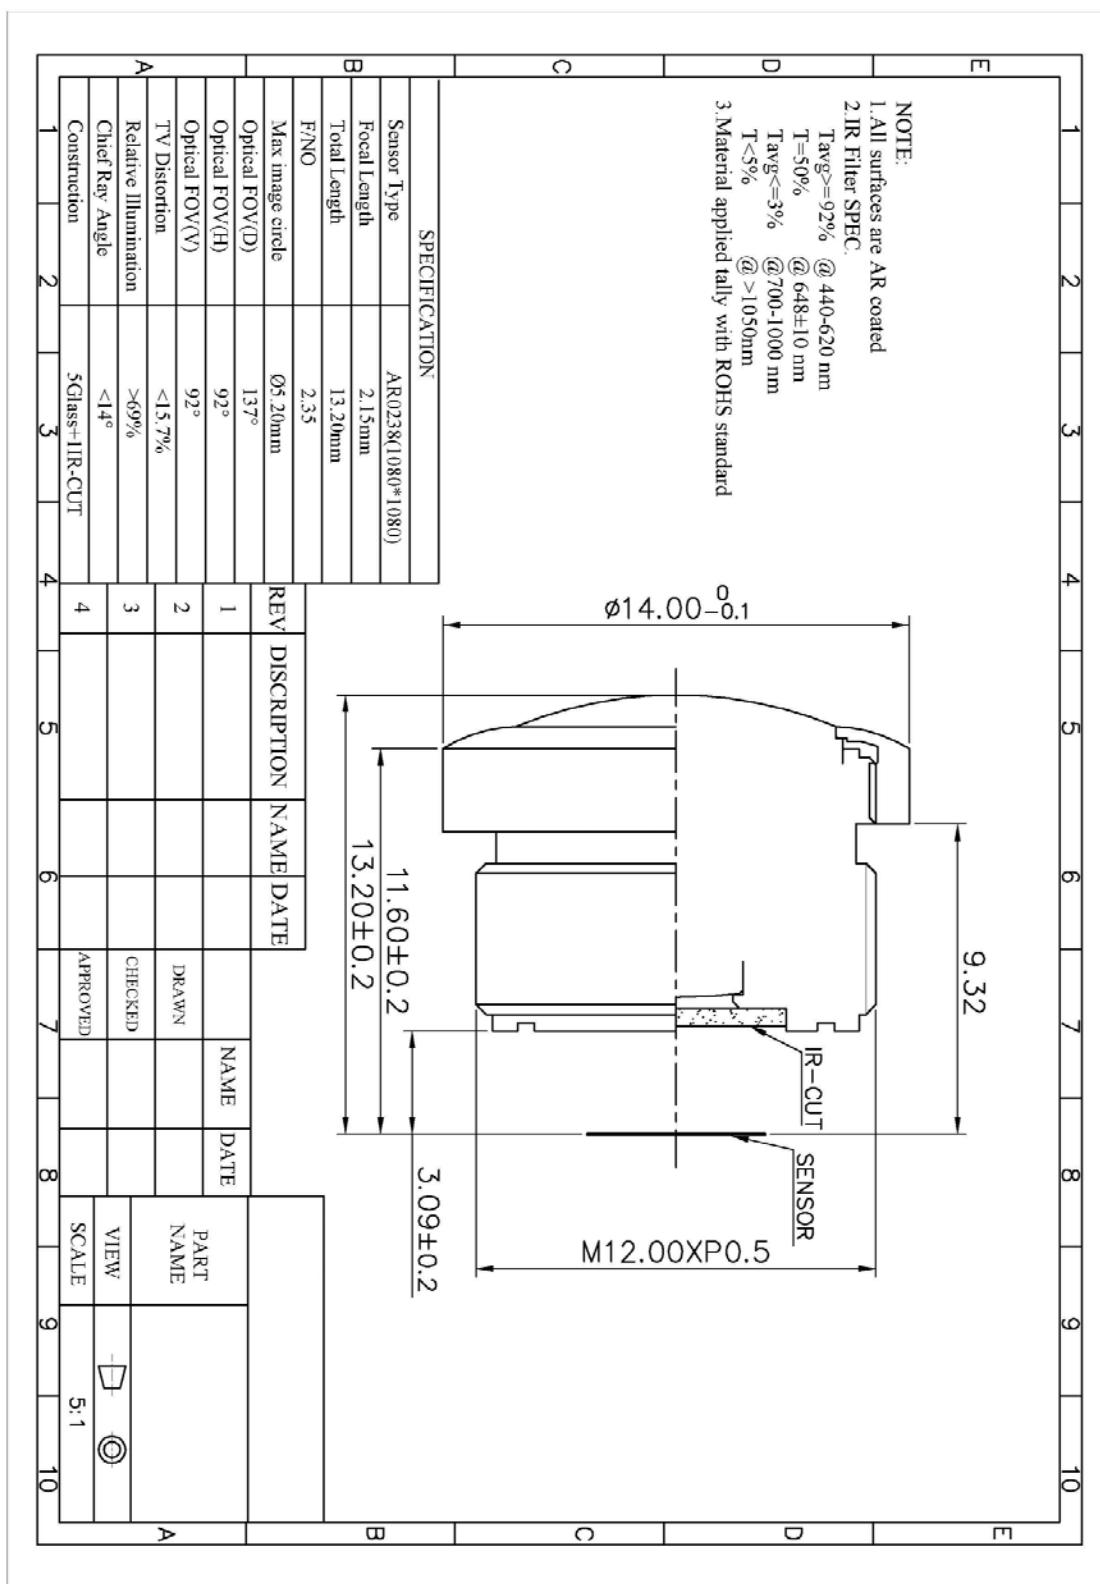

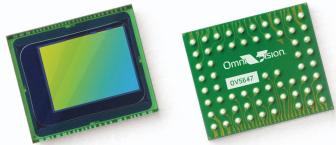

OV5647 5-megapixel product brief



available in
a lead-free
package

5-megapixel 1/4" Image Sensor with 1.4 μ m OmniBSI Technology Offering HD Video

The OV5647 is a 5-megapixel CMOS image sensor built on OmniVision's proprietary 1.4-micron OmniBSI™ backside illumination pixel architecture. The OV5647 delivers 5-megapixel photography in addition to high frame rate of 720p/60 and 1080p/30 high-definition (HD) video capture in an industry standard camera module size of 8.5 x 8.5 x 5 mm, making it an ideal solution for the mainstream mobile phone market.

The 720p/60 HD video is captured in full field of view (FOV) with 2x2 binning to double the sensitivity and improve signal-to-noise ratio (SNR). The post binning re-sampling filter helps minimize spatial and aliasing artifacts to provide superior image quality.

OmniBSI technology offers significant performance benefits over front-side illumination technology, such as increased sensitivity per unit area, improved quantum efficiency,

reduced crosstalk and photo response non-uniformity, which all contribute to significant improvements in image quality and color reproduction. Additionally, OmniVision CMOS image sensors use proprietary sensor technology to improve image quality by reducing or eliminating common lighting/electrical sources of image contamination, such as fixed pattern noise and smearing to produce a clean, fully stable color image.

The low power OV5647 supports a digital video parallel port or high-speed two-lane MIPI interface, and provides full-frame, windowed or binned 10-bit images in RAW RGB format. It offers all required automatic image control functions, including automatic exposure control, automatic white balance, automatic band filter, automatic 50/60 Hz luminance detection, and automatic black level calibration.


Find out more at www.ovt.com.

Omni*Vision*[®]

Applications

- Mobile Phones
- Digital Still Cameras
- PC Multimedia

OV5647



Product Features

- 1.4 $\mu\text{m} \times 1.4 \mu\text{m}$ pixel with OmniBSI technology for high performance (high sensitivity, low crosstalk, low noise)
- optical size of 1/4"
- automatic image control functions:
 - automatic exposure control (AEC)
 - automatic white balance (AWB)
 - automatic band filter (ABF)
 - automatic 50/60 Hz luminance detection
 - automatic black level calibration (ABLc)
- programmable controls for frame rate, AEC/AGC 16-zone size/position/weight control, mirror and flip, cropping, windowing, and panning
- image quality controls: lens correction, defective pixel canceling
- support for output formats: 8-/10-bit raw RGB data
- support for video or snapshot operations
- support for LED and flash strobe mode
- support for internal and external frame synchronization for frame exposure mode
- support for 2x2 binning for better SNR in low light conditions
- post binning resampling filter to minimize spatial/aliasing artifacts on 2x2 binned image
- support for horizontal and vertical sub-sampling
- standard serial SCCB interface
- digital video port (DVP) parallel output interface
- MIPI interface (two lanes)
- 32 bytes of embedded one-time programmable (OTP) memory
- on-chip phase lock loop (PLL)
- embedded 1.5V regulator for core power
- programmable I/O drive capability, I/O tri-state configurability
- support for black sun cancellation


Ordering Information

- OV5647-G04A
(color, chip probing, 200 μm backgrinding, reconstructed wafer)

Product Specifications

- **active array size:** 2592 \times 1944
- **max S/N ratio:** 34 dB
- **power supply:**
 - core: 1.5V $\pm 5\%$
(with embedded 1.5V regulator)
 - analog: 2.6 - 3.0V (2.8V typical)
 - I/O: 1.7 - 3.0V
- **dynamic range:** 67 dB @ 8x gain
- **maximum image transfer rate:**
 - QSXGA (2592x1944): 15 fps
 - 1080p: 30 fps
 - 960p: 45 fps
 - 720p: 60 fps
 - VGA (640x480): 90 fps
- **power requirements:**
 - active: 96 mA
 - standby: 20 μA
- **sensitivity:** 600 mV/lux-sec
- **temperature range:**
 - **operating:** -30°C to 70°C junction temperature
 - **stable image:** 0°C to 50°C junction temperature
- **shutter:** rolling shutter
- **maximum exposure interval:** 1968 \times t_{ROW}
- **pixel size:** 1.4 $\mu\text{m} \times 1.4 \mu\text{m}$
- **dark current:** 8 mV/sec @ 50°C junction temperature
- **image area:** 3673.6 $\mu\text{m} \times 2738.4 \mu\text{m}$
- **die dimensions:** 5520 $\mu\text{m} \times 4700 \mu\text{m}$
- **input clock frequency:** 6 - 27 MHz

Functional Block Diagram

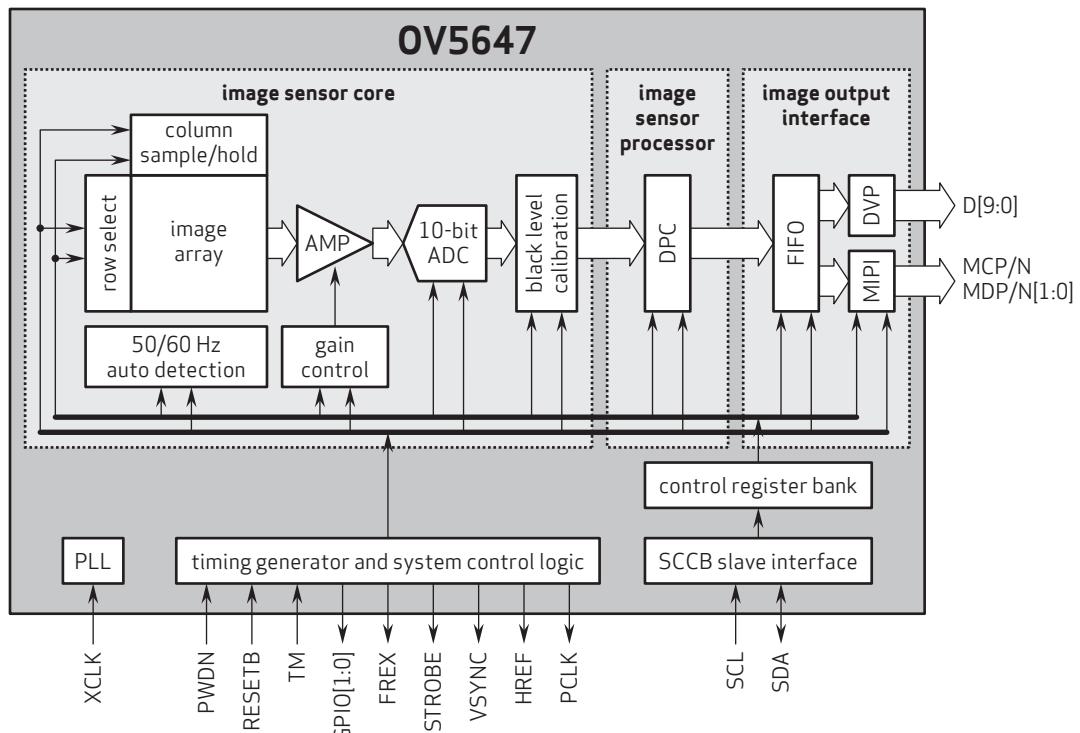

Camera Module Pinout Definition Reference Chart

| Pin Signal | Description |
|-------------------------------|---|
| DGND GND | ground for digital circuit |
| AGND | ground for analog circuit |
| PCLK DCK | DVP PCLK output |
| XCLR PWDN XSHUTDOWN STANDBY | power down active high with internal pull-down resistor |
| MCLK XVCLK XCLK INCK | system input clock |
| RESET RST | reset active low with internal pull-up resistor |
| NC NULL | no connect |
| SDA SIO_D SIOD | SCCB data |
| SCL SIO_C SIOC | SCCB input clock |
| VSYNC XVS FSYNC | DVP VSYNC output |
| HREF XHS | DVP HREF output |
| DOVDD | power for I/O circuit |
| AFVDD | power for VCM circuit |
| AVDD | power for analog circuit |
| DVDD | power for digital circuit |
| STROBE FSTROBE | strobe output |
| FSIN | synchronize the VSYNC signal from the other sensor |
| SID | SCCB last bit ID input |
| ILPWM | mechanical shutter output indicator |
| FREX | frame exposure / mechanical shutter |
| GPIO | general purpose inputs |
| SLASEL | I2C slave address select |
| AFEN | CEN chip enable active high on VCM driver IC |
| MIPI Interface | |
| MDN0 DN0 MD0N DATA_N DMO1N | MIPI 1st data lane negative output |
| MDP0 DP0 MD0P DATA_P DMO1P | MIPI 1st data lane positive output |
| MDN1 DN1 MD1N DATA2_N DMO2N | MIPI 2nd data lane negative output |
| MDP1 DP1 MD1P DATA2_P DMO2P | MIPI 2nd data lane positive output |
| MDN2 DN2 MD2N DATA3_N DMO3N | MIPI 3rd data lane negative output |
| MDP2 DP2 MD2P DATA3_P DMO3P | MIPI 3rd data lane positive output |
| MDN3 DN3 MD3N DATA4_N DMO4N | MIPI 4th data lane negative output |
| MDP3 DP3 MD3P DATA4_P DMO4P | MIPI 4th data lane positive output |
| MCN CLKN CLK_N DCKN | MIPI clock negative output |
| MCP CLKP MCP CLK_P DCKN | MIPI clock positive output |
| DVP Parallel Interface | |
| D0 DO0 Y0 | DVP data output port 0 |
| D1 DO1 Y1 | DVP data output port 1 |
| D2 DO2 Y2 | DVP data output port 2 |
| D3 DO3 Y3 | DVP data output port 3 |
| D4 DO4 Y4 | DVP data output port 4 |
| D5 DO5 Y5 | DVP data output port 5 |
| D6 DO6 Y6 | DVP data output port 6 |
| D7 DO7 Y7 | DVP data output port 7 |
| D8 DO8 Y8 | DVP data output port 8 |
| D9 DO9 Y9 | DVP data output port 9 |
| D10 DO10 Y10 | DVP data output port 10 |
| D11 DO11 Y11 | DVP data output port 11 |

Cameras Applications



Camera Reliability Test

| Reliability Inspection Item | | Testing Method | Acceptance Criteria | |
|-----------------------------|-----------------------------|---|-------------------------|-------------------------|
| Category | Item | | | |
| Environmental | Storage Temperature | High 60°C 96 Hours | Temperature Chamber | No Abnormal Situation |
| | | Low -20°C 96 Hours | Temperature Chamber | No Abnormal Situation |
| | Operation Temperature | High 60°C 24 Hours | Temperature Chamber | No Abnormal Situation |
| | | Low -20°C 24 Hours | Temperature Chamber | No Abnormal Situation |
| | Humidity | 60°C 80% 24 Hours | Temperature Chamber | No Abnormal Situation |
| | Thermal Shock | High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours | Temperature Chamber | No Abnormal Situation |
| Physical | Drop Test (Free Falling) | Without Package 60cm | 10 Times on Wood Floor | Electrically Functional |
| | | With Package 60cm | 10 Times on Wood Floor | Electrically Functional |
| | Vibration Test | 50Hz X-Axis 2mm 30min | Vibration Table | Electrically Functional |
| | | 50Hz Y-Axis 2mm 30min | Vibration Table | Electrically Functional |
| | | 50Hz Z-Axis 2mm 30min | Vibration Table | Electrically Functional |
| | Cable Tensile Strength Test | Loading Weight 4 kg 60 Seconds Cycling in 24 Hours | Tensile Testing Machine | Electrically Functional |
| Electrical | ESD Test | Contact Discharge 2 KV | ESD Testing Machine | Electrically Functional |
| | | Air Discharge 4 KV | ESD Testing Machine | Electrically Functional |
| | Aging Test | On/Off 30 Seconds Cycling in 24 Hours | Power Switch | Electrically Functional |
| | USB Connector | On/Off 250 Times | Plug and Unplug | Electrically Functional |



| Inspection Item | | Inspection Method | Standard of Inspection |
|-----------------|-----------|-------------------|--------------------------|
| Category | Item | | |
| Appearance | FPC/ PCB | Color | The Naked Eye |
| | | Be Torn/Chopped | The Naked Eye |
| | | Marking | The Naked Eye |
| | Holder | Scratches | The Naked Eye |
| | | Gap | The Naked Eye |
| | | Screw | The Naked Eye |
| | | Damage | The Naked Eye |
| | Lens | Scratch | The Naked Eye |
| | | Contamination | The Naked Eye |
| | | Oil Film | The Naked Eye |
| | | Cover Tape | The Naked Eye |
| Function | Image | No Communication | Test Board |
| | | Bright Pixel | Black Board |
| | | Dark Pixel | White board |
| | | Blurry | The Naked Eye |
| | | No Image | The Naked Eye |
| | | Vertical Line | The Naked Eye |
| | | Horizontal Line | The Naked Eye |
| | | Light Leakage | The Naked Eye |
| | | Blinking Image | The Naked Eye |
| | | Bruise | Inspection Jig |
| | | Resolution | Chart |
| | | Color | The Naked Eye |
| | | Noise | The Naked Eye |
| | | Corner Dark | Less Than 100px By 100px |
| Dimension | Dimension | Color Resolution | The Naked Eye |
| | | Height | The Naked Eye |
| | | Width | The Naked Eye |
| | | Length | The Naked Eye |
| | | Overall | The Naked Eye |




CMOS CAMERA MODULES

your *BEST* camera module partner

KLT Package Solutions

KLT Camera Module

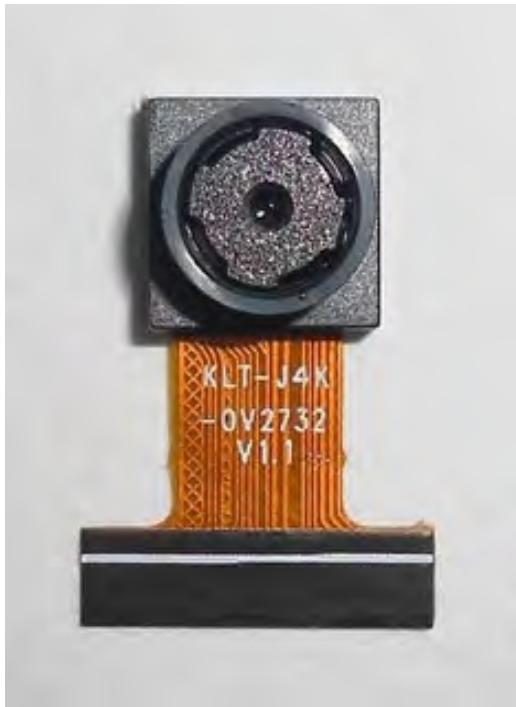


Complete with Lens Protection Film



Tray with Grid and Space



Place Cameras on the Tray

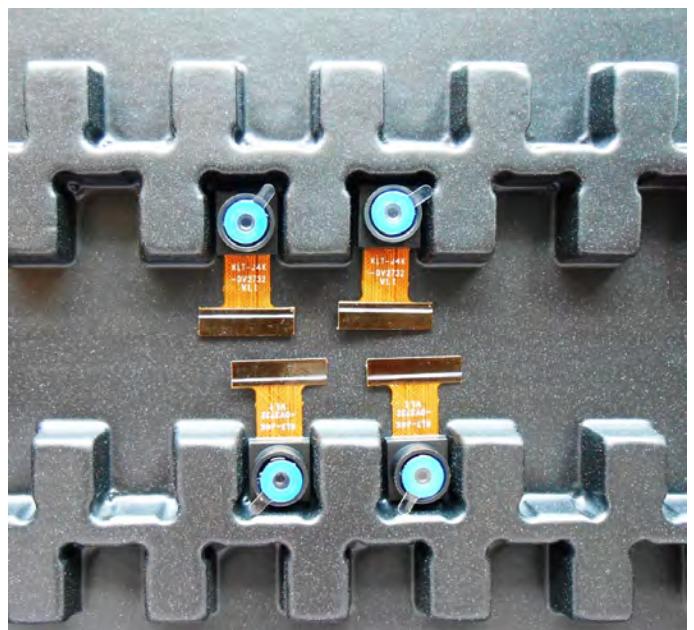

Camera Modules Package Solution

Full Tray of Cameras



Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag





CMOS CAMERA MODULES

your *BEST* camera module partner



Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your BEST camera module partner

Large Order Package Solution

Place Foam Sheets Between Trays

Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box

Foam Sheets are Tightly Fitting Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your BEST camera module partner

Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your *BEST* camera module partner

Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution





Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel



The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

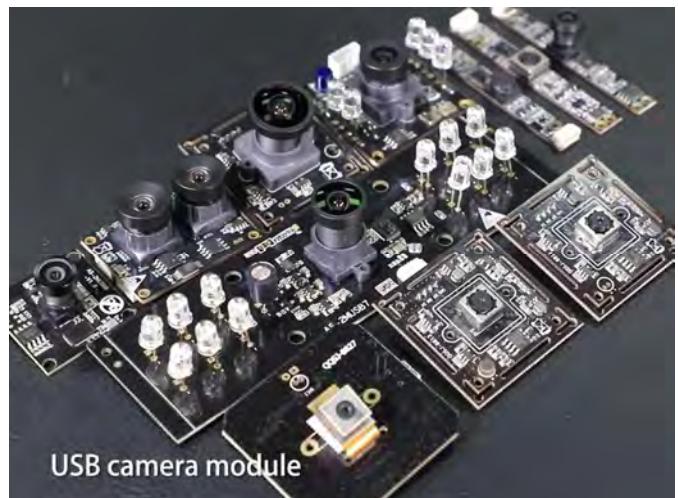**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.



KLT Strength

Powerful Factory



Professional Service



Promised Delivery

