


KLT-USB2X-Y2MF-IMX258 V5+V6**13MP Sony IMX258 Dual Lens Stereo Fixed Focus USB 2.0 Camera Module****KLT-USB2X-IMX258 + KLT-Y2MF-IMX258 V5.0 + KLT-Y2MF-IMX258 V6.0**


Top View



Side View

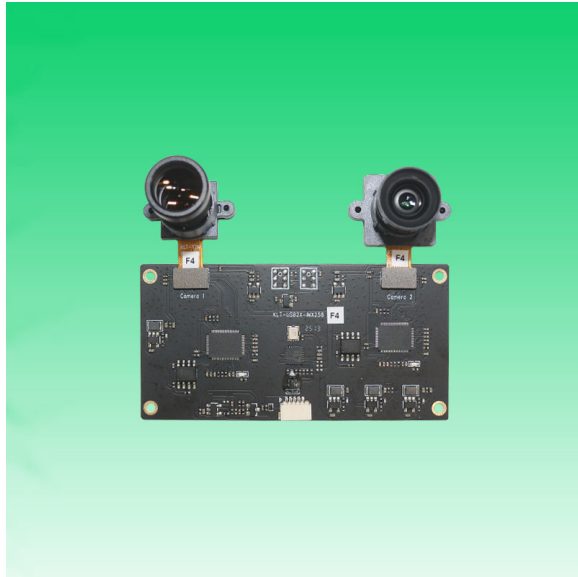

Bottom View

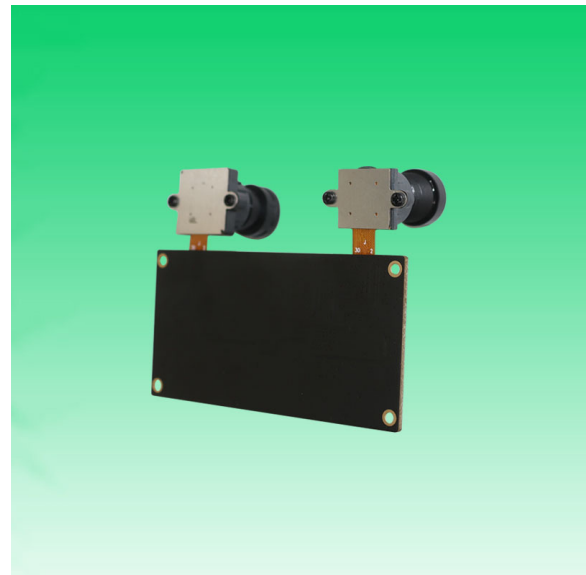

Back View

KLT-USB2X-Y2MF-IMX258 V5+V6**13MP Sony IMX258 Dual Lens Stereo Fixed Focus USB 2.0 Camera Module****KLT-USB2X-IMX258 + KLT-Y2MF-IMX258 V5.0 + KLT-Y2MF-IMX258 V6.0**


Camera Module No.	KLT-USB2X-Y2MF-IMX258 V5+V6
Resolution	13MP
Image Sensor	IMX258
Sensor Type	1/3.06"
Pixel Size	1.12 um x 1.12 um
EFL	2.27 mm
F.NO	2.40
Pixel	4224 x 3136
USB 2.0 Board	KLT-USB2X-IMX258
Camera Module 1	KLT-Y2MF-IMX258 V5.0
View Angle 1	13.8°(DFOV) 11.1°(HFOV) 8.3°(VFOV)
Camera Module 2	KLT-Y2MF-IMX258 V6.0
View Angle 2	57.0°(DFOV) 45.0°(HFOV) 33.0°(VFOV)
Module Type	Fixed Focus
Interface	USB 2.0
Output Format	MJPEG
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure
Audio	None
Input Voltage	DC 5V
Working Current	Max 500mA
PCB Size	38mm x 38mm
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
USB Cable	USB Cable

Wide Compatibility with Windows, Android, Mac OS, Linux, or Raspberry Pi



KLT-USB2X-IMX258**13MP Sony IMX258 Camera Module Dual Lens Stereo USB 2.0 PCB Board**

Top View

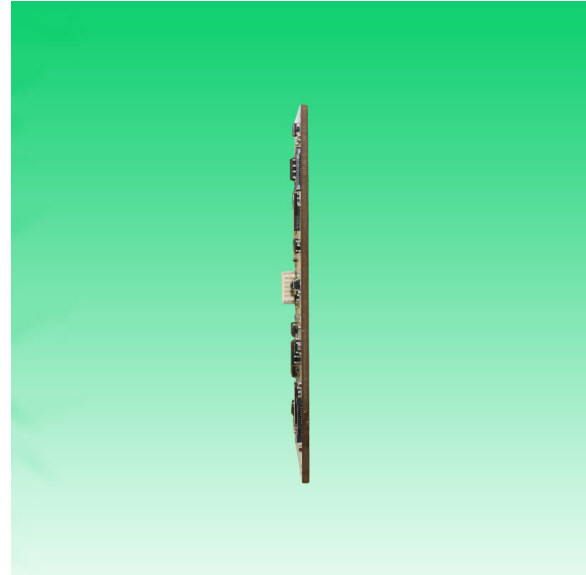


Side View




Bottom View



Back View

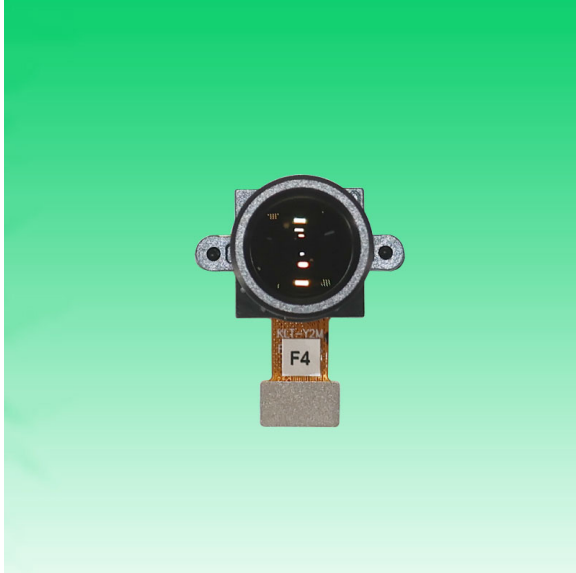KLT-Y2MF-IMX258 V5.0**13MP Sony IMX258 MIPI Interface M12 Fixed Focus Camera Module**

Front View

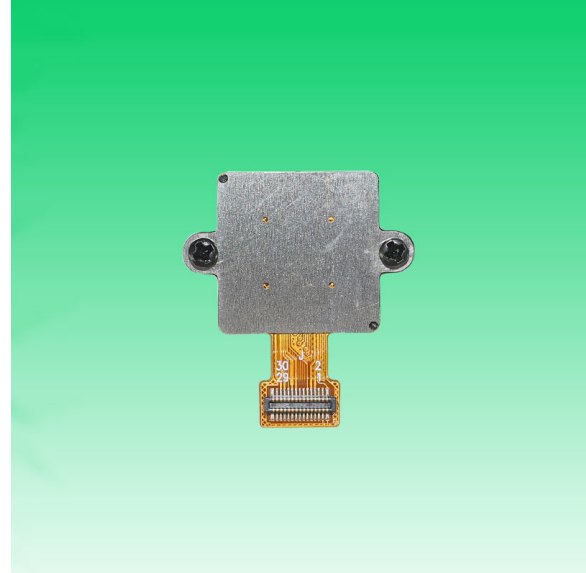

Back View

Specifications

Camera Module No.	KLT-Y2MF-IMX258 V5.0
Resolution	13MP
Image Sensor	IMX258
Sensor Type	1/3.06"
Pixel Size	1.12 μm x 1.12 μm
EFL	25.00 mm
F.NO	2.40
Pixel	4224 x 3136
View Angle	13.8°(DFOV) 11.1°(HFOV) 8.3°(VFOV)
Lens Dimensions	13.50 x 13.50 x 27.90 mm
Module Size	22.00 mm
Module Type	Fixed Focus
Interface	MIPI
Auto Focus VCM Driver IC	None
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
Mating Connector	BBR43-30KB533

KLT-Y2MF-IMX258 V5.0**13MP Sony IMX258 MIPI Interface M12 Fixed Focus Camera Module**

Top View



Side View




Bottom View



Mating Connector



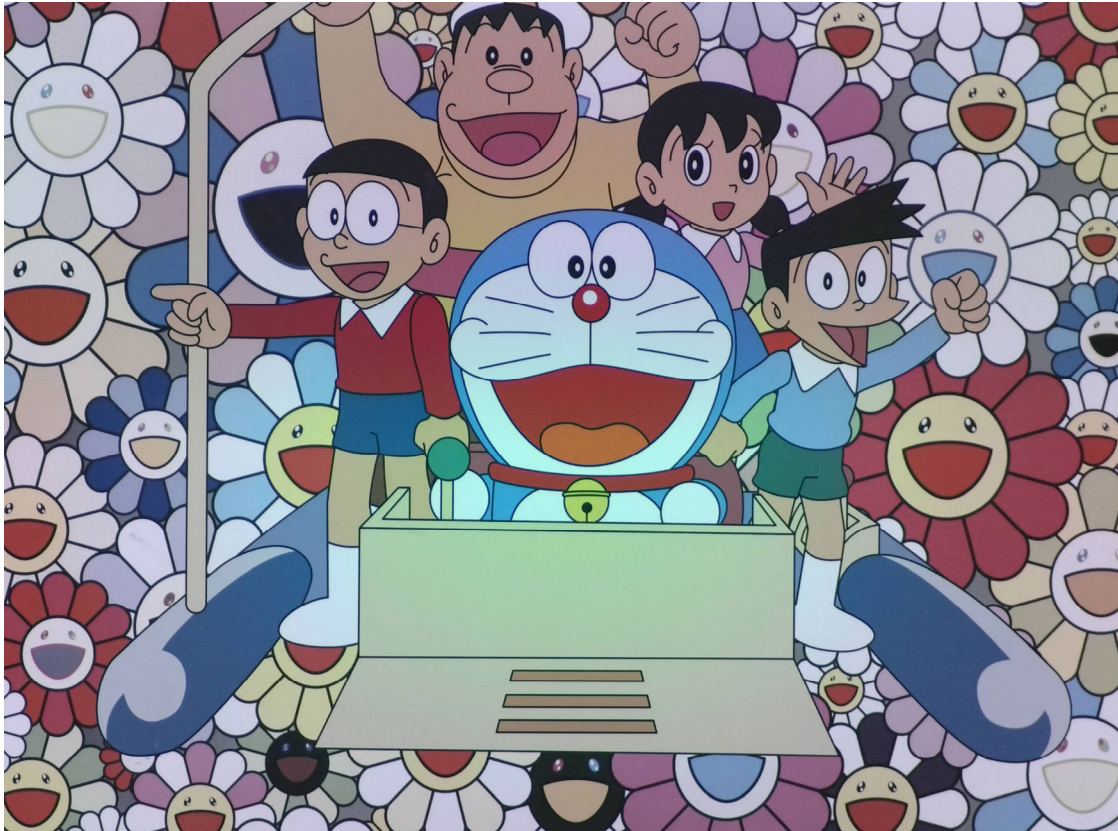

47,87 Ti Titanium	50,94 V Vanadium	51,99 Cr Chromium	54,94 Mn Manganese	55,85 Fe Iron	58,93 Co Kobalt	58,69 Ni Nickel	63,55 Cu Copper	65,39 Zn Zink	69,72 Ga Gallium	72,64 Ge Germanium
91,22 Zr Zirkonium	92,91 Nb Niobium	95,94 Mo Molybdenum	97 Tc Technetium	101,1 Ru Ruthenium	102,9 Rh Rhodium	106,4 Rd Palladium	107,9 Ag Silver	112,4 Cd Cadmium	114,8 In Indium	118,7 Sn Zinn
178,5 Hf Hafnium	180,9 Ta Tantalum	183,8 W Tungsten	186,2 Re Rhenium	190,2 Os Osmium	192,2 Ir Iridium	195,1 Pt Platinum	196,9 Au Gold	200,6 Hg Mercury	204,4 Tl Thallium	208,9 Pb Blei
(261) Rf Rutherfordium	(262) Db Dubnium	(263) Sg Seaborgium	(264) Bh Bohrium	(265) Hs Hassium	(268) Mt Meitnerium	(281) Ds Darmstadtium	(280) Rg Roentgenium	(285) Cn Copernicium	(284) Nh Nihonium	(289) Fl Flerovium
138,9 La Lanthanum	140,1 Ce Cerium	140,9 Pr Praseodymium	144,2 Nd Neodymium	145 Pm Promethium	150,4 Sm Samarium	151,9 Eu Europium	157,2 Gd Gadolinium	158,9 Tb Terbium	162,5 Dy Dysprosium	164,9 Ho Holmium
(232) Ac Actinium	(232) Th Thorium	(231) Pa Protactinium	(238) U Uranium	(239) Np Neptunium	(239) Pu Plutonium	(243) Am Americium	(247) Cm Curium	(252) Bk Berkelium	(251) Cf Californium	(252) Es Einsteinium



RoHS	
0	SIGNAL
1	GND
2	GND
3	GND
4	GND
5	NC
6	NC
7	SDA
8	DOVDD1.8V
9	SCL
10	DVDD1.2V
11	GND
12	XSHUTDOWN
13	MCN
14	NC
15	MCP
16	GND
17	MD0N
18	MCLK
19	MD0P
20	GND
21	MD1N
22	FLASH
23	MD1P
24	AVDD2.8V
25	VPP(NC)
26	AGND
27	MD2N
28	MD3N
29	MD2P
30	MD3P

NOTE:

1.Sensor I2C slave address:0x34

Parameters:

1、 Sensor specification:

Image Sensor: IMX258

Pixel: 1.12um×1.12um

Lens Type: 1/3.06

Important Voltage Description: DVDD1.2V
(external power supply);

2. Lens specification:

FOV: 13.8°(D);11.1°(H);8.3°(V) ±3°


F/NO.: 2.4

TV distortion: $<0.64\%$


Focal length: 25mm

Composition: 6G++IR FILTER


IR Cut Coating: 650nm±10nm@50%

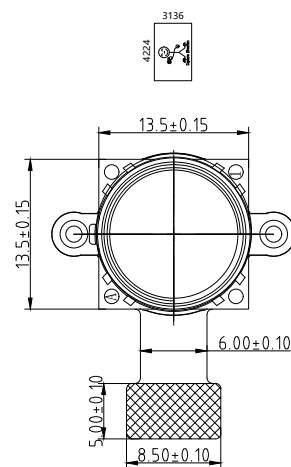

TOP VIEW

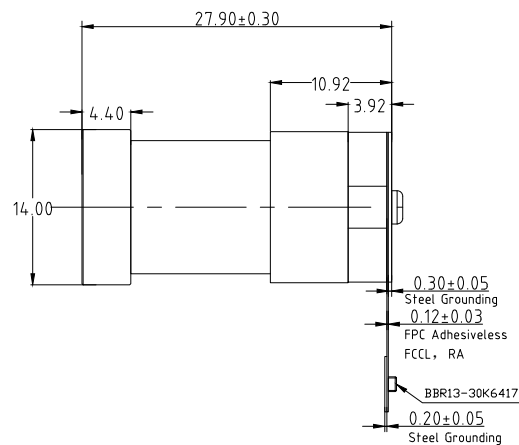


SIDE VIEW

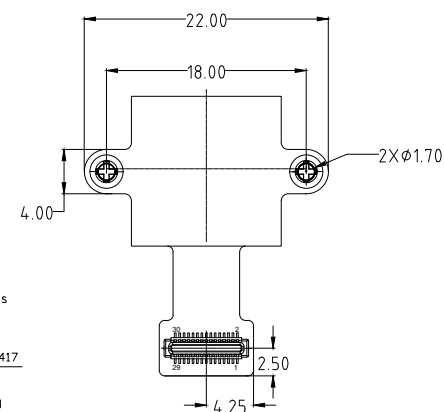


BOTTOM VIEW

Version	Information
V1.0	First Version
V3.0	Change sensor I2C address
V4.0	Change lens and holder
V5.0	Change lens and holder

Kai Lap Technologies Group Ltd				
Designed By	Kevin	Model Name:	KLT-Y2MF-IMX258 V5.0	
Checked By	Jacky	Projection Type:	Unit:	Date:
		 Third Angle	mm	3/7/2025
		Scale:	Sheet:	Version:
		1:1	1 of 1	1/0

KLT-Y2MF-IMX258 V6.0**13MP Sony IMX258 MIPI Interface M12 Fixed Focus Camera Module**

Front View

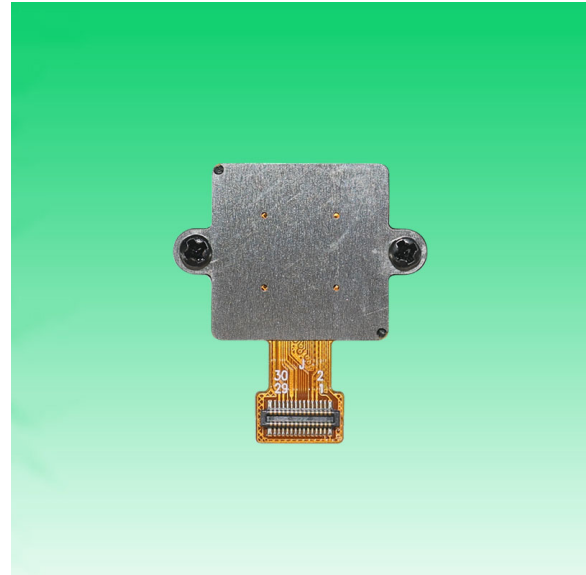

Back View

Specifications

Camera Module No.	KLT-Y2MF-IMX258 V6.0
Resolution	13MP
Image Sensor	IMX258
Sensor Type	1/3.06"
Pixel Size	1.12 μm x 1.12 μm
EFL	6.21 mm
F.NO	1.60
Pixel	4224 x 3136
View Angle	57.0°(DFOV) 45.0°(HFOV) 33.0°(VFOV)
Lens Dimensions	17.00 x 17.00 x 23.42 mm
Module Size	26.95 x 22.00 mm
Module Type	Fixed Focus
Interface	MIPI
Auto Focus VCM Driver IC	None
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
Mating Connector	BBR43-30KB533

KLT-Y2MF-IMX258 V6.0**13MP Sony IMX258 MIPI Interface M12 Fixed Focus Camera Module**

Top View




Side View



Bottom View



Mating Connector

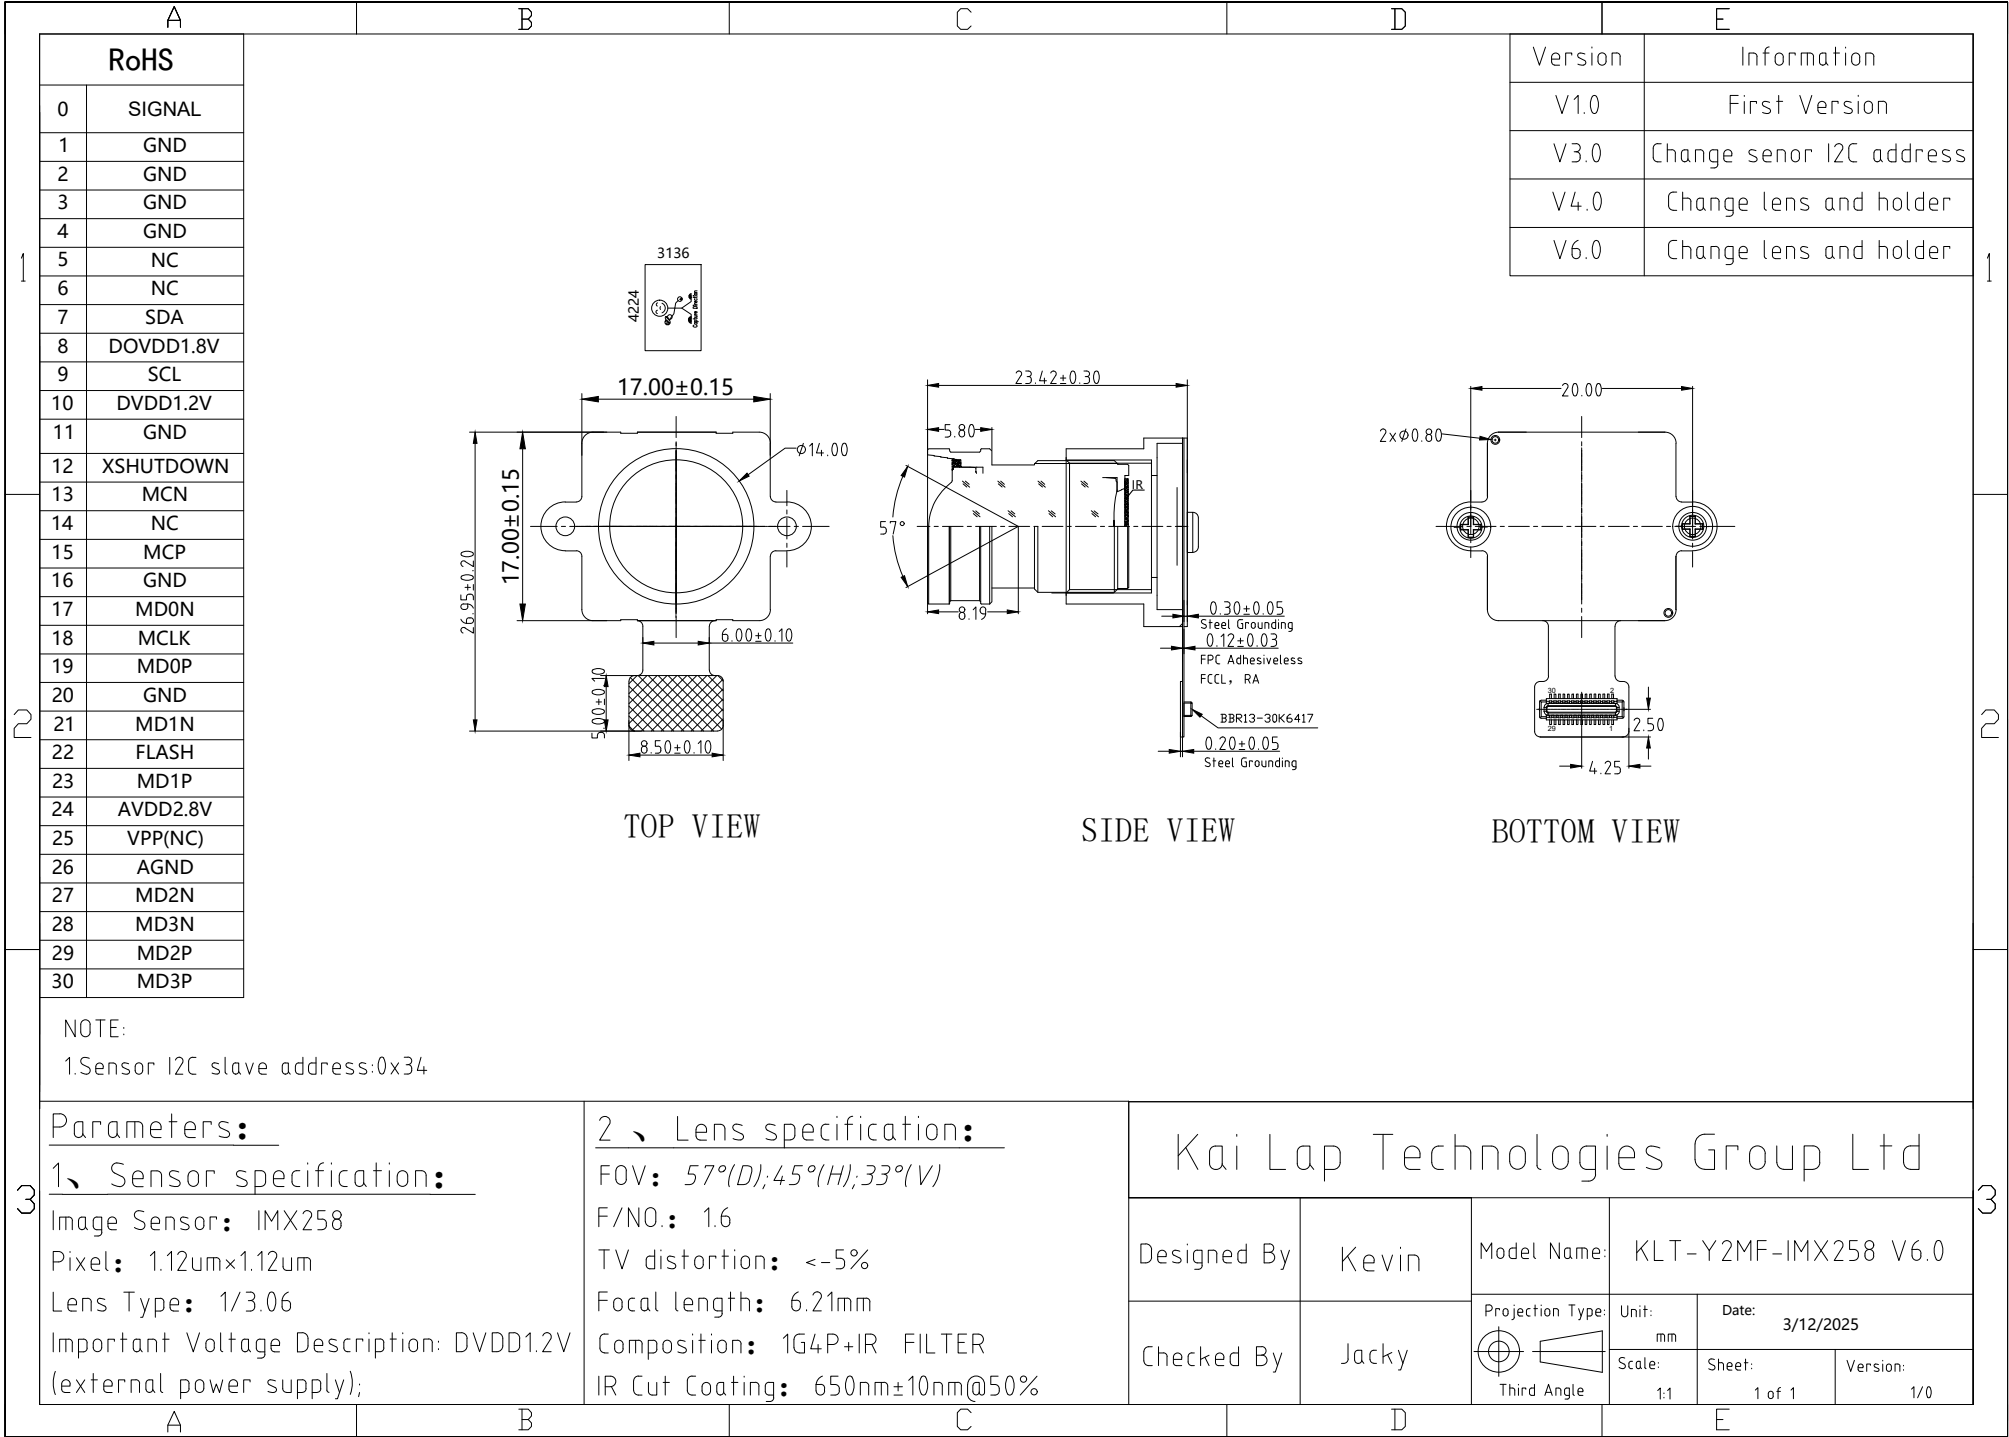

[Product Brief]

Ver.1.0

IMX258

Diagonal 5.867 mm (Type 1/3.06) 13Mega-Pixel CMOS Image Sensor with Square Pixel for Color Cameras

Description

IMX258 is a diagonal 5.867mm (Type 1/3.06) 13 Mega-pixel CMOS active pixel type stacked image sensor with a square pixel array. It adopts Exmor RS™ technology to achieve high speed image capturing by column parallel A/D converter circuits and high sensitivity and low noise image (comparing with conventional CMOS image sensor) through the backside illuminated imaging pixel structure. R, G, and B pigment primary color mosaic filter is employed. By introducing spatially multiplexed exposure technology, high dynamic range still pictures and movies are achievable. It

equips an electronic shutter with variable integration time. It operates with three power supply voltages: analog 2.7 V, digital 1.2 V and 1.8 V for input/output interface and achieves low power consumption.

In addition, this product is designed for use in cellular phone and tablet pc. When using this for another application, Sony does not guarantee the quality and reliability of product. Therefore, don't use this for applications other than cellular phone and tablet pc. Consult your Sony sales representative if you have any questions.


Functions and Features

- ◆ Back-illuminated and stacked CMOS image sensor Exmor RSTM
- ◆ Phase Detection pixel data output for Phase Detection Auto Focus
- ◆ High Dynamic Range (HDR) mode with raw data output.
- ◆ High signal to noise ratio (SNR).
- ◆ Full resolution @30fps (Normal / HDR). 4K2K @30fps (Normal / HDR) 1080p @60fps (Normal)
- ◆ Output video format of RAW10/8.
- ◆ Pixel binning readout and V sub-sampling function.
- ◆ Independent flipping and mirroring.
- ◆ CSI-2 serial data output (MIPI 2lane/4lane, Max. 1.3Gbps/lane, D-PHY spec. ver. 1.1 compliant)
- ◆ 2-wire serial communication.
- ◆ Two PLLs for independent clock generation for pixel control and data output interface.
- ◆ Dynamic Defect Pixel Correction.
- ◆ Fast mode transition. (on the fly)
- ◆ Dual sensor synchronization operation.
- ◆ 4K bit of OTP ROM for users.
- ◆ Built-in temperature sensor.

Device Structure

- ◆ CMOS image sensor
- ◆ Image size : Diagonal 5.867 mm (Type 1/3.06)
- ◆ Total number of pixels : 4224 (H) × 3192 (V) approx. 13.48 M pixels
- ◆ Number of effective pixels : 4224 (H) × 3144 (V) approx. 13.28 M pixels
- ◆ Number of active pixels : 4208 (H) × 3120 (V) approx. 13.13 M pixels
- ◆ Chip size : 5.990 mm (H) × 3.908 mm (V)
- ◆ Unit cell size : 1.12 μm (H) × 1.12 μm (V)
- ◆ Substrate material : Silicon




System block diagram

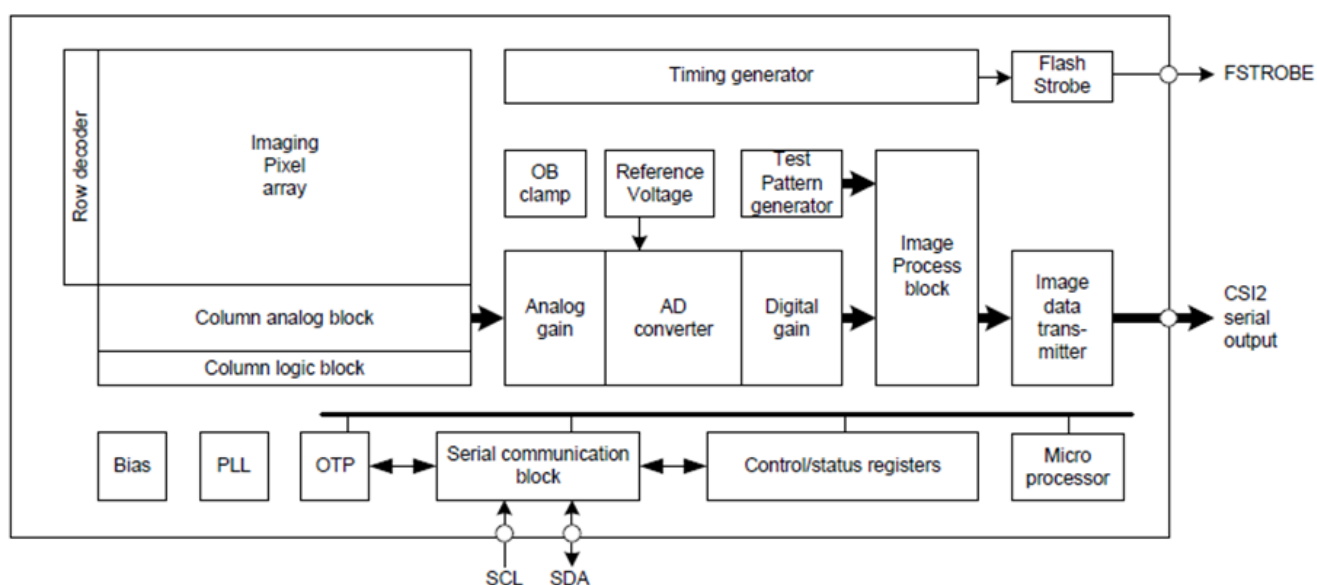


Exmor RS

* Exmor RS is a trademark of Sony Corporation. The Exmor RS is a Sony's CMOS image sensor with high-resolution, high-performance and compact size by replacing a supporting substrate in Exmor R™ which changed fundamental structure of Exmor™ pixel adopted column parallel A/D converter to back-illuminated type, with layered chips formed signal processing circuits.

REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	TJECR10018-02	NEW RELEASE PER NPI10009	11/05/10'	RAIN	DICK, SON	HARDWARE
B	TJECR13014	Δ XI, AXI	05/13/13'	RAIN	SteveM DESIGN	Jeff DESIGN

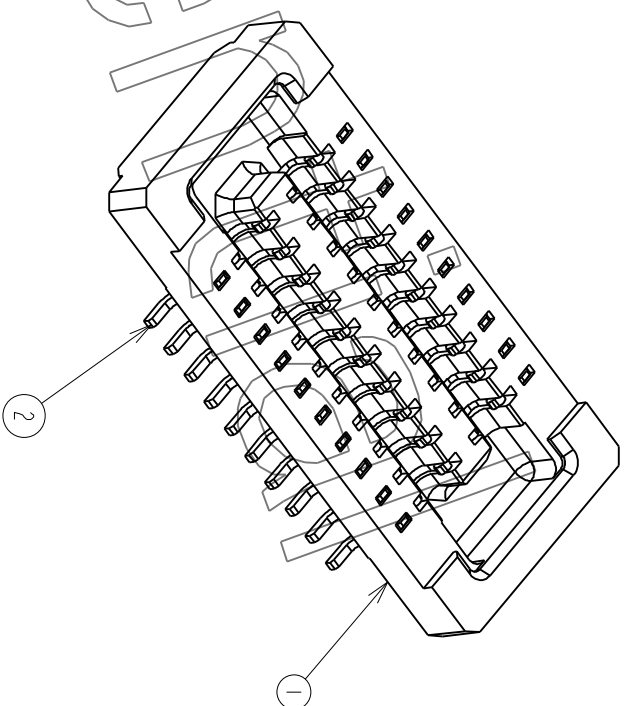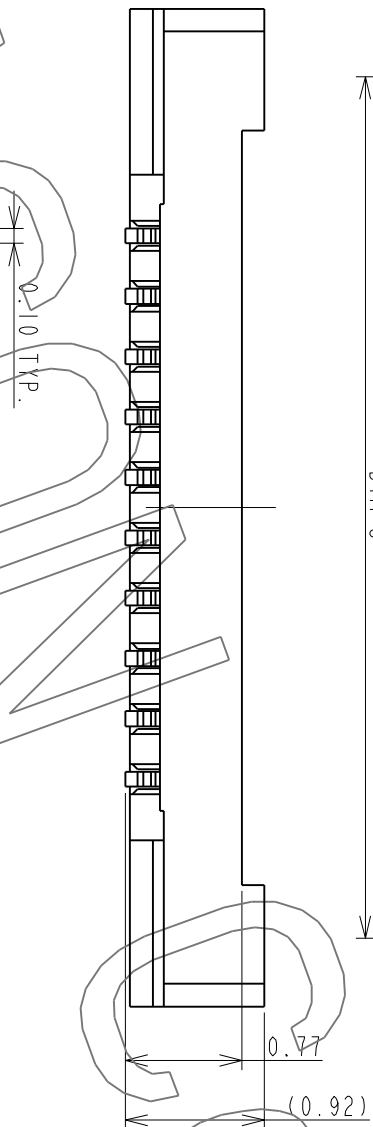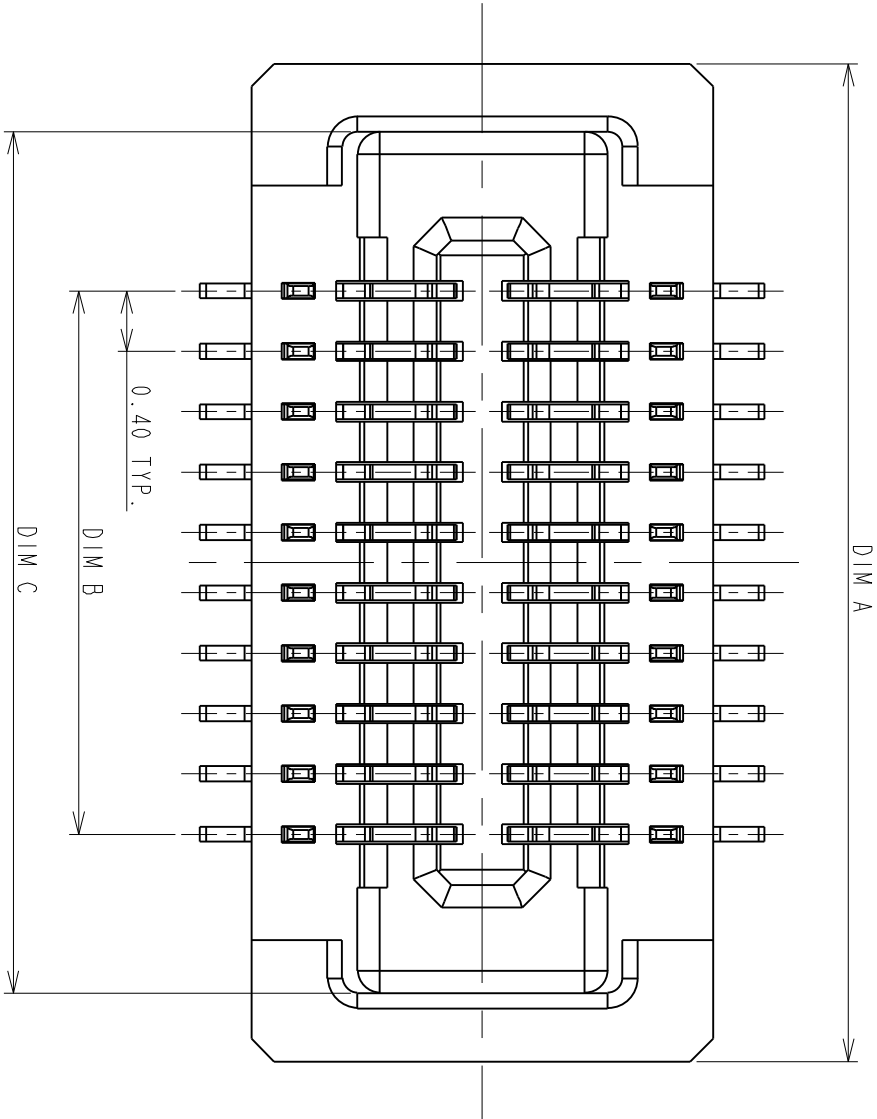

0.08
ALL OF PLACES

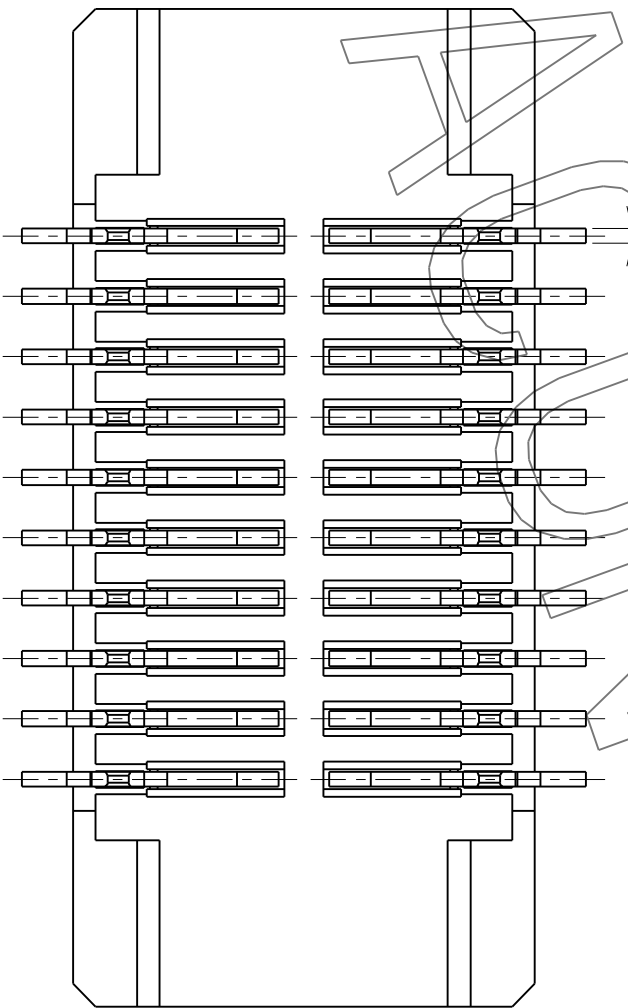


ITEM	NAME	Q'TY	PART #	MATERIAL / FINISH
2	CONTACT	XX	T-BBR43-100X30	COPPER ALLOY/PLATING GOLD
1	HOUSING	1	I-BBR43-1XXX33	HIGH TEMP RESIN/UL 94 V-0
TOLERANCES UNLESS OTHERWISE SPECIFIED				
GENERAL		XX	±0.38	RAIN
DESIGN		.XX	±0.25	DATE
RAIN		.XXX	±0.05	DATE
ANGLES		X° ±3.0°	DATE	DATE
CHECKED		.XX ±1.0°	DATE	DATE
SCALE 20:1		HARDWARE	04/24/10'	TITLE
SHEET 1 OF 2		APPROVED	DATE	P0.4*H1.0mm BOARD TO BOARD
UNIT MM		DICK, LEE	04/24/10'	CONN. RECEPTACLE
CUSTOMER DRAWING		SERIES	BBR	WITHOUT HOLD DOWN
		DWG NO.	C-BBR43-04-01	SIZE A3
		REV.	B	



This document and information contained herein are the property of Advanced Connectek Inc., copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission

All materials meet the ACON's spec. environment-related substances management technical standard

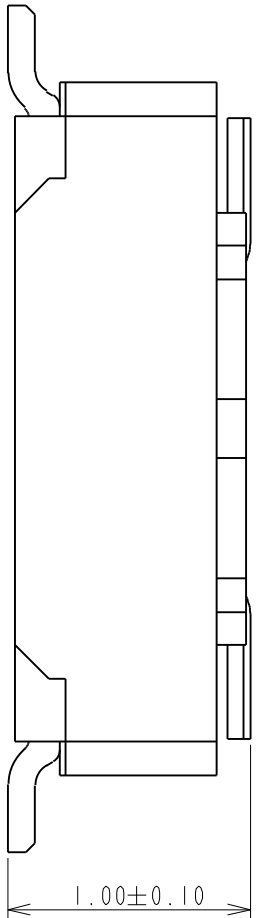

PRODUCT NUMBERING CODE:

BBR43	-	XX	K	X	5	X	X
1	2	3	4	5	6	7	

1. PRODUCTION CODE:

BBR43: BOARD TO BOARD 0.4 PITCH RECEPTACLE

2. POSITIONS:

XX: POSITIONS(SEE TABLE A

3. INSULATOR COLOR:

K: BLACK

4. CONTACT PLATING:

- 1: GOLD 1u" MIN
- 2: GOLD 5u" MIN
- 3: GOLD 10u" MIN
- B: GOLD 4u" MIN FOR SPOT PLATING
- ALL OVER: Ni 50~100u"

5. TYPE OF HEIGHT:


5: H=0.77mm

6. TYPE OF HOLD DOWN:

3: WITHOUT HOLD DOWN

7. OTHER

- 2: WITH POST, FINISHED PRODUCTS
- 3: WITHOUT POST, FINISHED PRODUCTS

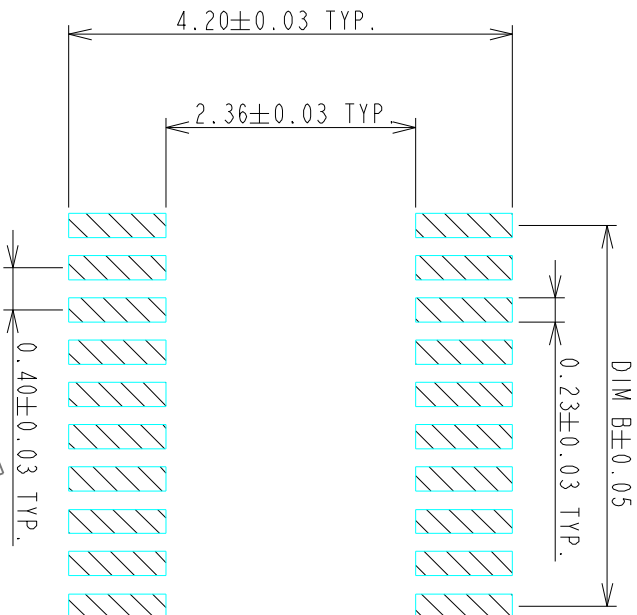

RECOMMENDED P.C. BOARD PATTERN DIMENSION (WITHOUT HOLD DOWN)

NOTES:			
1.0: RATING:			
1.1: VOLTAGE: 60V AC/DC			
1.2: CURRENT: 0.5 AMPS			
1.3: OPERATION TEMPERATURE: -40°C TO +85°C			
2.0: ELECTRICAL CHARACTERISTIC:			
2.1: CONTACT RESISTANCE: 50 mΩ MAX INITIAL			
2.2: INSULATION RESISTANCE: 1000 MΩ MIN INITIAL			
2.3: DIELECTIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE			
3.0 TOLERANCES UNLESS OTHERWISE SPECIFIED			
GENERAL: DIMENSION >10.00	±0.13		
DIMENSION 5.00~10.00	±0.10		
DIMENSION <5.00	±0.05		

POSITIONS	DIM A	DIM B	DIM C
10	4.61	1.60	3.71
14	5.41	2.40	4.51
16	5.81	2.80	4.91
18	6.21	3.20	5.31
20	6.61	3.60	5.71
22	7.01	4.00	6.11
24	7.41	4.40	6.51
26	7.81	4.80	6.91
30	8.61	5.60	7.71
32	9.01	6.00	8.11
34	9.41	6.40	8.51
40	10.61	7.60	9.71
44	11.41	8.4	10.51
48	12.21	9.20	11.31
50	12.61	9.60	11.71
54	13.41	10.40	12.51
60	14.61	11.60	13.71
70	16.61	13.60	15.71
80	18.61	15.60	17.71

4.0 ALL COPLANARITY IS 0.08mm MAX. BEFORE REFLOW
ALL COPLANARITY IS 0.10mm MAX. AFTER REFLOW



TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN		DATE	
GENERAL X ₁	±0.38	RAIN		04/15/10	
XX	±0.13	DESIGN		DATE	
ANGLES X ₁	±3.0°	RAIN		04/15/10	
XX	±2.0°	CHECKED		DATE	
SCALE 20:1		HARDWARE		04/24/10	
SHEET 2 OF 2		APPROVED		DATE	
UNIT mm		DICK. LEE		04/24/10	
UNIT mm		CUSTOMER DRAWING			
TITLE		P0.4*11.0mm BOARD TO BOARD CONN. RECEPTACLE WITHOUT HOLD DOWN			
SERIES		BBR			
DWG NO.		C-BBR43-04-01			
REV.		B			

Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

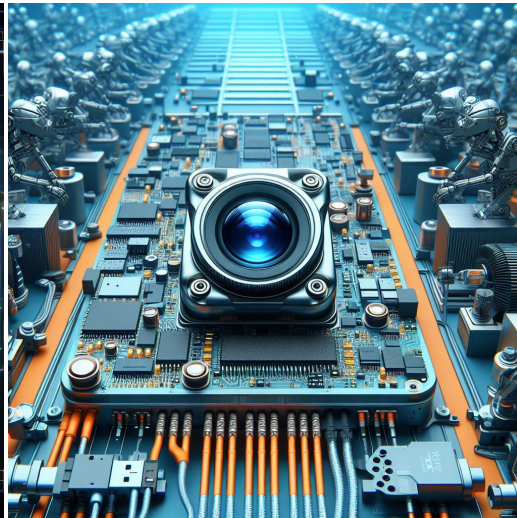

Machine Vision



Agricultural Monitor

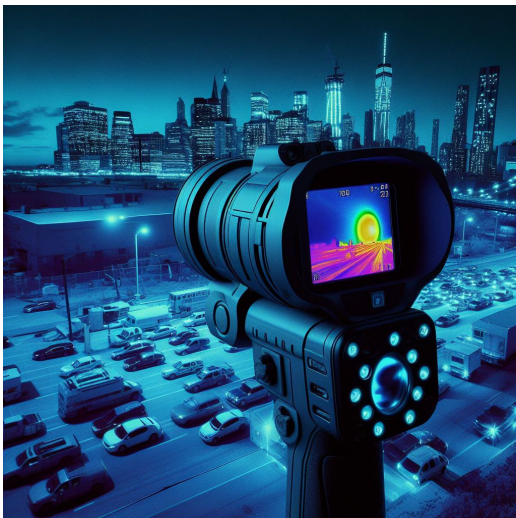

Night Vision Security



Drone and Sports Eagle Eyes



Interactive Pet Camera

Cameras Applications

your BEST camera module partner



IMAGING DEVICES



Camera Module Pinout Definition Reference Chart

OmniVision Sony Samsung On-Semi Aptina Himax GalaxyCore PixArt SmartSens Sensors	
Pin Signal	Description
DGND GND	ground for digital circuit
AGND	ground for analog circuit
PCLK DCK	DVP PCLK output
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor
MCLK XVCLK XCLK INCK	system input clock
RESET RST	reset active low with internal pull-up resistor
NC NULL	no connect
SDA SIO_D SIOD	SCCB data
SCL SIO_C SIOC	SCCB input clock
VSYNC XVS FSYNC	DVP VSYNC output
HREF XHS	DVP HREF output
DOVDD	power for I/O circuit
AFVDD	power for VCM circuit
AVDD	power for analog circuit
DVDD	power for digital circuit
STROBE FSTROBE	strobe output
FSIN	synchronize the VSYNC signal from the other sensor
SID	SCCB last bit ID input
ILPWM	mechanical shutter output indicator
FREX	frame exposure / mechanical shutter
GPIO	general purpose inputs
SLASEL	I2C slave address select
AFEN	CEN chip enable active high on VCM driver IC
MIPI Interface	
MDN0 DN0 MD0N DATA_N DMO1N	MIPI 1st data lane negative output
MDP0 DP0 MD0P DATA_P DMO1P	MIPI 1st data lane positive output
MDN1 DN1 MD1N DATA2_N DMO2N	MIPI 2nd data lane negative output
MDP1 DP1 MD1P DATA2_P DMO2P	MIPI 2nd data lane positive output
MDN2 DN2 MD2N DATA3_N DMO3N	MIPI 3rd data lane negative output
MDP2 DP2 MD2P DATA3_P DMO3P	MIPI 3rd data lane positive output
MDN3 DN3 MD3N DATA4_N DMO4N	MIPI 4th data lane negative output
MDP3 DP3 MD3P DATA4_P DMO4P	MIPI 4th data lane positive output
MCN CLKN CLK_N DCKN	MIPI clock negative output
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output
DVP Parallel Interface	
D0 DO0 Y0	DVP data output port 0
D1 DO1 Y1	DVP data output port 1
D2 DO2 Y2	DVP data output port 2
D3 DO3 Y3	DVP data output port 3
D4 DO4 Y4	DVP data output port 4
D5 DO5 Y5	DVP data output port 5
D6 DO6 Y6	DVP data output port 6
D7 DO7 Y7	DVP data output port 7
D8 DO8 Y8	DVP data output port 8
D9 DO9 Y9	DVP data output port 9
D10 DO10 Y10	DVP data output port 10
D11 DO11 Y11	DVP data output port 11

Camera Reliability Test


Reliability Inspection Item			Testing Method	Acceptance Criteria
Category		Item		
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item		Inspection Method	Standard of Inspection		
Category					
Item					
Appearance	FPC/ PCB	Color	The Naked Eye	Major Difference is Not Allowed.	
		Be Torn/Chopped	The Naked Eye	Copper Crack Exposure is Not Allowed.	
		Marking	The Naked Eye	Clear, Recognizable (Within 30cm Distance)	
	Holder	Scratches	The Naked Eye	The Inside Crack Exposure is Not Allowed	
		Gap	The Naked Eye	Meet the Height Standard	
		Screw	The Naked Eye	Make Sure Screws Are Presented (If Any)	
		Damage	The Naked Eye	The Inside Crack Exposure is Not Allowed	
	Lens	Scratch	The Naked Eye	No Effect On Resolution Standard	
		Contamination	The Naked Eye	No Effect On Resolution Standard	
		Oil Film	The Naked Eye	No Effect On Resolution Standard	
		Cover Tape	The Naked Eye	No Issue On Appearance.	
	Function	Image	No Communication	Test Board	Not Allowed
			Bright Pixel	Black Board	Not Allowed In the Image Center
Dark Pixel			White board	Not Allowed In the Image Center	
Blurry			The Naked Eye	Not Allowed	
No Image			The Naked Eye	Not Allowed	
Vertical Line			The Naked Eye	Not Allowed	
Horizontal Line			The Naked Eye	Not Allowed	
Light Leakage			The Naked Eye	Not Allowed	
Blinking Image			The Naked Eye	Not Allowed	
Bruise			Inspection Jig	Not Allowed	
Resolution			Chart	Follows Outgoing Inspection Chart Standard	
Color			The Naked Eye	No Issue	
Noise			The Naked Eye	Not Allowed	
Corner Dark			The Naked Eye	Less Than 100px By 100px	
Color Resolution			The Naked Eye	No Issue	
Dimension			Height	The Naked Eye	Follows Approval Data Sheet
	Width	The Naked Eye	Follows Approval Data Sheet		
	Length	The Naked Eye	Follows Approval Data Sheet		
	Overall	The Naked Eye	Follows Approval Data Sheet		

KLT Package Solutions

KLT Camera Module

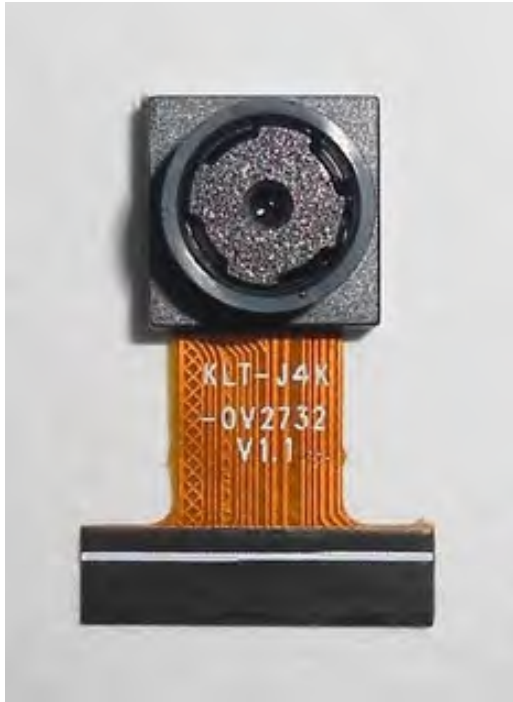

Complete with Lens Protection Film



Tray with Grid and Space




Place Cameras on the Tray



Camera Modules Package Solution

Full Tray of Cameras

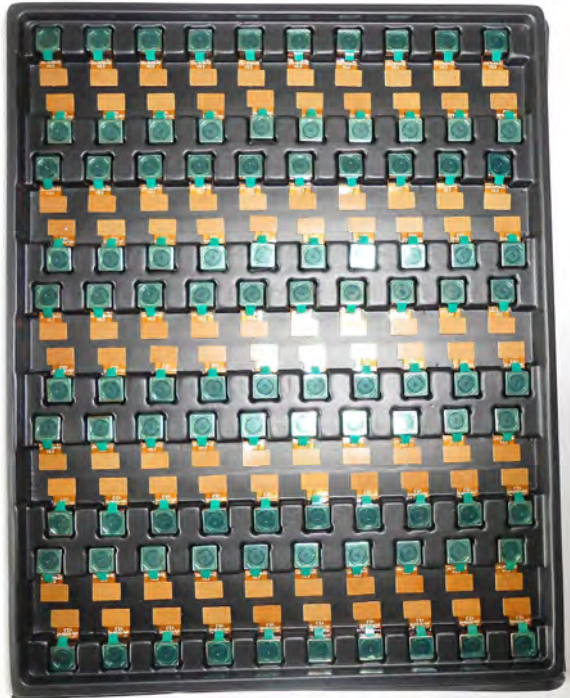


Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

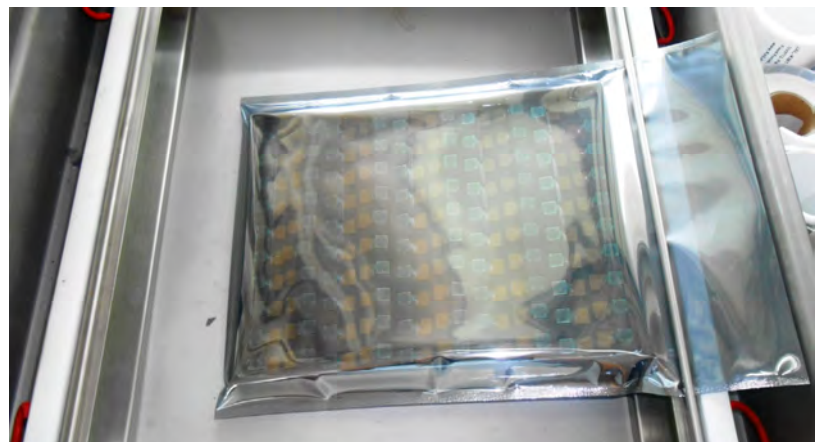

Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



Large Order Package Solution

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box



Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment



Place Small Boxes into Larger Box



Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution



Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel




The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




**Company Kai Lap Technologies (KLT)**

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

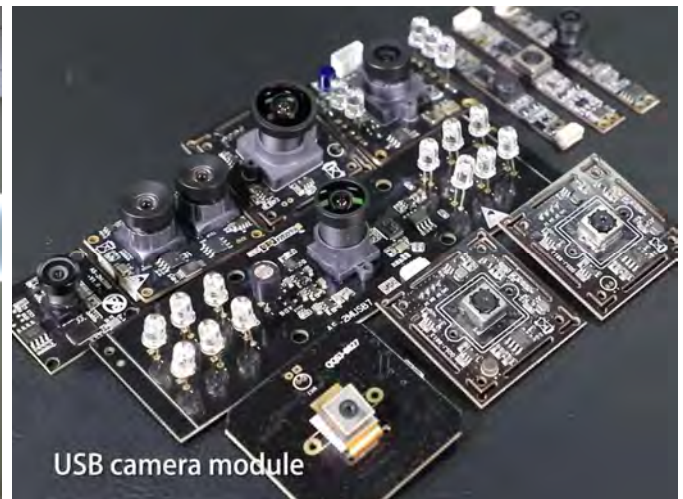**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.





CMOS CAMERA MODULES




your BEST camera module partner

KLT Strength

Powerful Factory



Professional Service

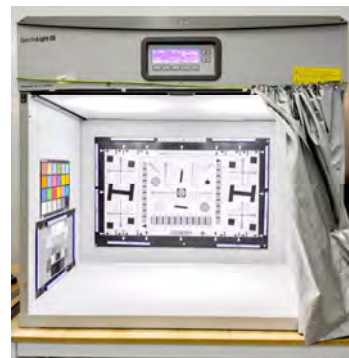

Promised Delivery



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.