


KLT-OIS-USB4A-FF-IMX258 V1.2

13MP Sony IMX258 OIS MGS Fixed Focus USB 2.0 Camera Module

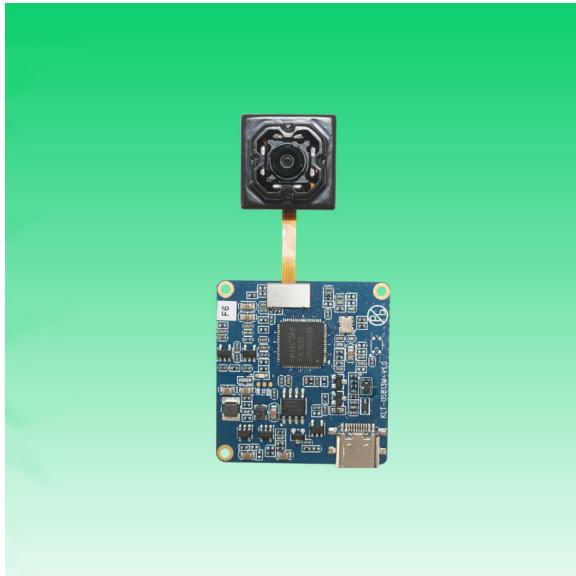

KLT-OIS-USB4A-FF-IMX258 V1.2 is an 13MP Fixed Focus USB camera module based on 1/3.06" IMX258 image sensor. Micro Gimbal Stabilizer (MGS) enables the camera to take clear and sharp images in moving environment. It delivers high-speed, 4K resolution ultra sharp image. The camera has a dedicated, high-performance fixed focus function providing best-in-class image and video output. This camera module is ideal solution for drones, automotive, agriculture farming, medical equipment, and traffic monitoring.

Key Features

- 4K resolution (4224 x 3192) Sony IMX258 sensor
- Micro Gimbal Stabilizer (MGS) on optical image stabilization (OIS) platform
- High speed USB 2.0 Plug and Play
- MJPG output format
- Low power consumption
- Compact size
- UVC compliant to Windows, Linux, OS with UVC driver
- USB OTG (On-The-Go) support

Camera Module No.	KLT-OIS-USB4A-FF-IMX258 V1.2
Resolution	13MP
Image Sensor	IMX258 w/ MGS OIS
Sensor Type	1/3.06"
Pixel Size	1.12 um x 1.12 um
EFL	1.90 mm
F.NO	2.20
Stabilization Method	Optical Image Stabilization (OIS)
Stabilizer Type	Micro Gimbal Stabilizer (MGS)
Stabilizer Axis No.	2 Axis (Pitch and Yaw)
Stabilizer Angle	Max. 3.0°
Stabilizer Power	180 mW
Pixel	4224 x 3192
View Angle	123.0°(DFOV) 102.0°(HFOV) 84.0°(VFOV)
Lens Dimensions	19.0 x 19.0 x 9.90 mm
Module Type	Fixed Focus
Auto Focus VCM Driver IC	None
Interface	USB 2.0
Output Format	MJPEG
Auto Control	Saturation, Contrast, Acutance White Balance, Exposure
Audio	None
Input Voltage	DC 5V
Working Current	Max 500mA
System Compatibility	Windows XP (SP2, SP3), Vista, 7, 8, 10, 11 Android, Mac OS, Linux or OS with UVC Driver Raspberry Pi by USB Port
Software for USB Camera	AMCAP, Webcam Viewer, V4L2 Controls Contacam, VLC Player, MotionEye OS iSpy, ZoneMider, Yawcam
Lens Type	650nm IR Cut
Operating Temperature	-20°C to +70°C
USB Cable	USB Cable



Windows



android





Mac OS



Linux




Raspberry Pi

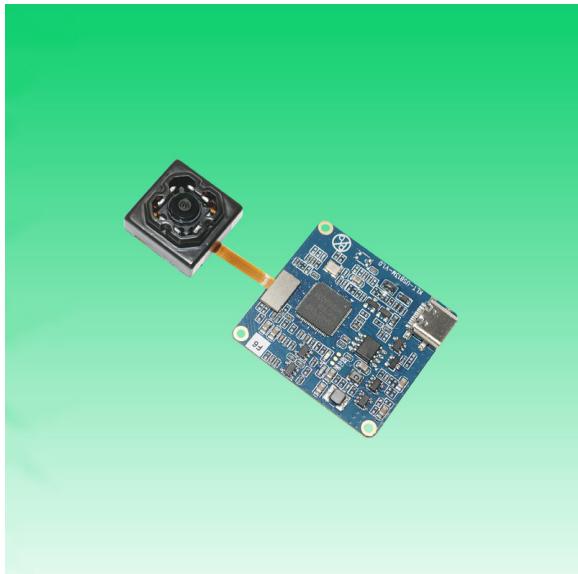**KLT-OIS-USB4A-FF-IMX258 V1.2****13MP Sony IMX258 OIS MGS Fixed Focus USB 2.0 Camera Module**

Top View



Side View

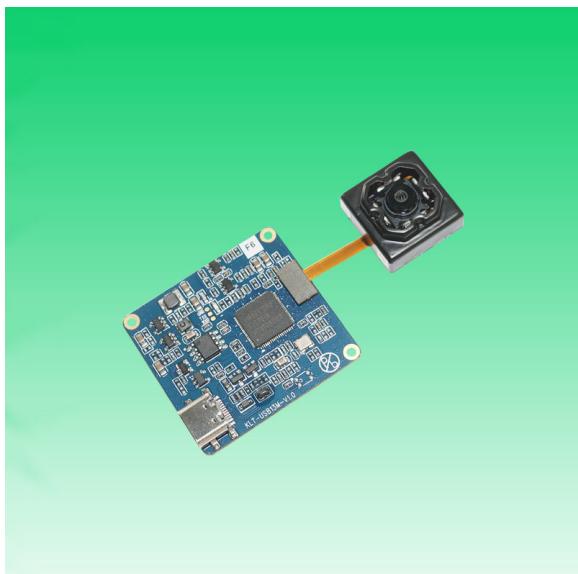

Bottom View




Mating Connector


KLT-OIS-USB4A-FF-IMX258 V1.2

13MP Sony IMX258 OIS MGS Fixed Focus USB 2.0 Camera Module


FORMAT	RESOLUTION	FRAME RATE
		USB 2.0
MJPG	320 x 240	25 FPS
	640 x 480 (VGA)	25 FPS
	800 x 600	25 FPS
	1024 x 768	25 FPS
	1280 x 720 (720P)	25 FPS
	1600 x 1200	25 FPS
	1920 x 1080 (1080P)	25 FPS
	2592 x 1944 (5MP)	10 FPS
	3264 x 2448 (8MP)	10 FPS
	3840 x 2160	10 FPS
	4192 x 3104	10 FPS






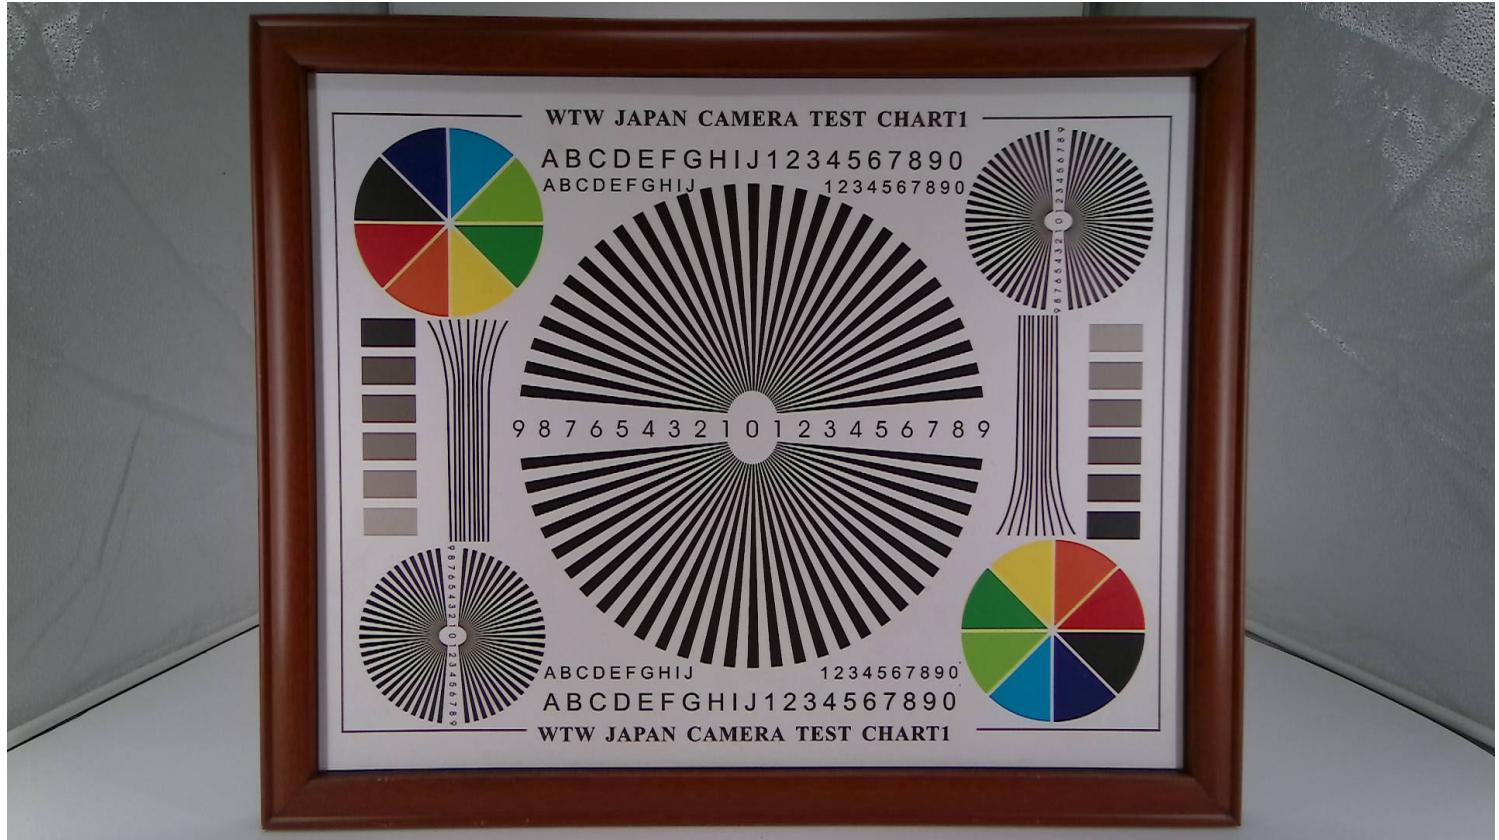

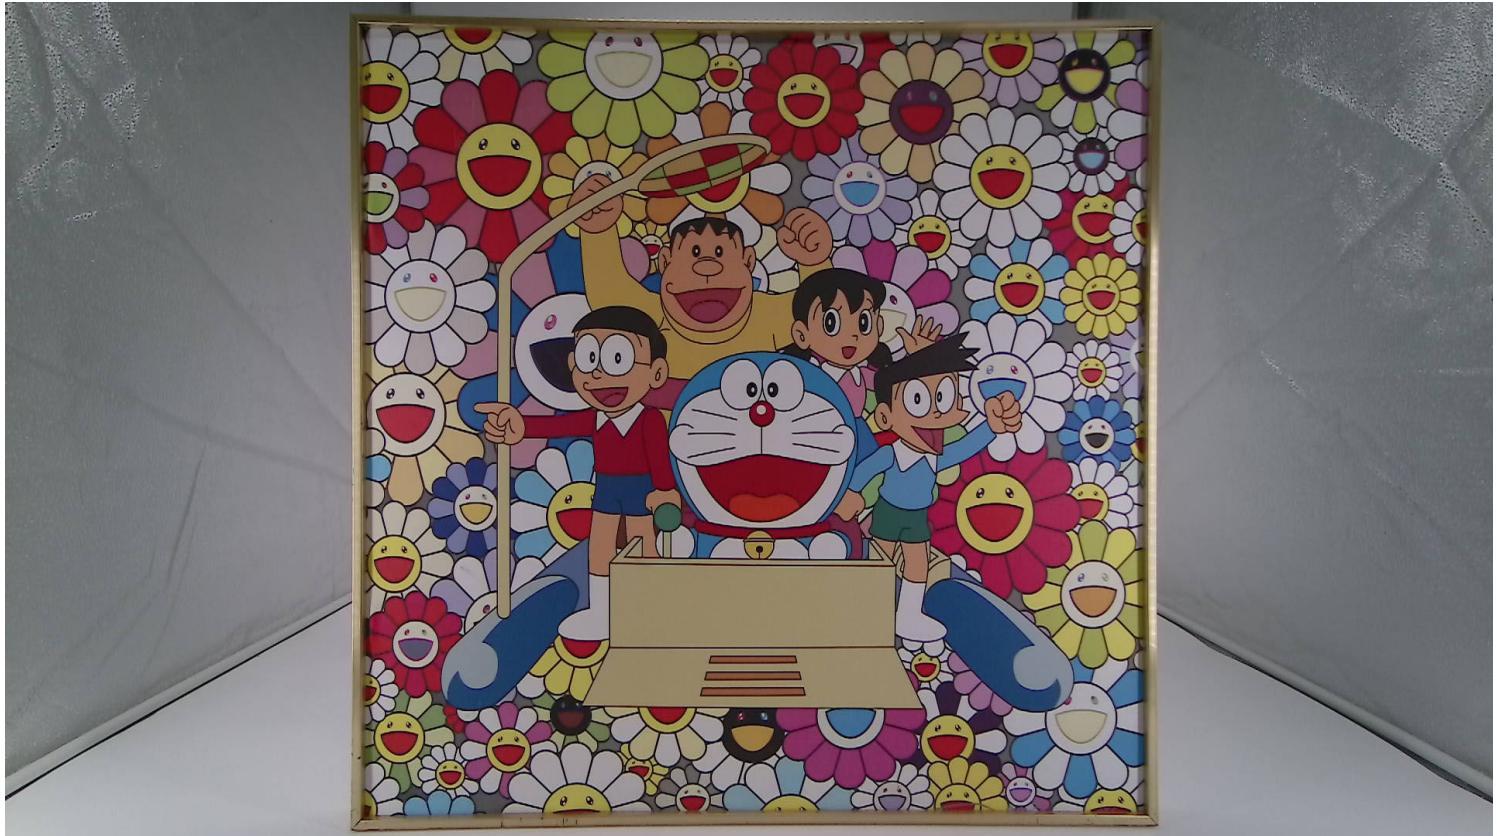

www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

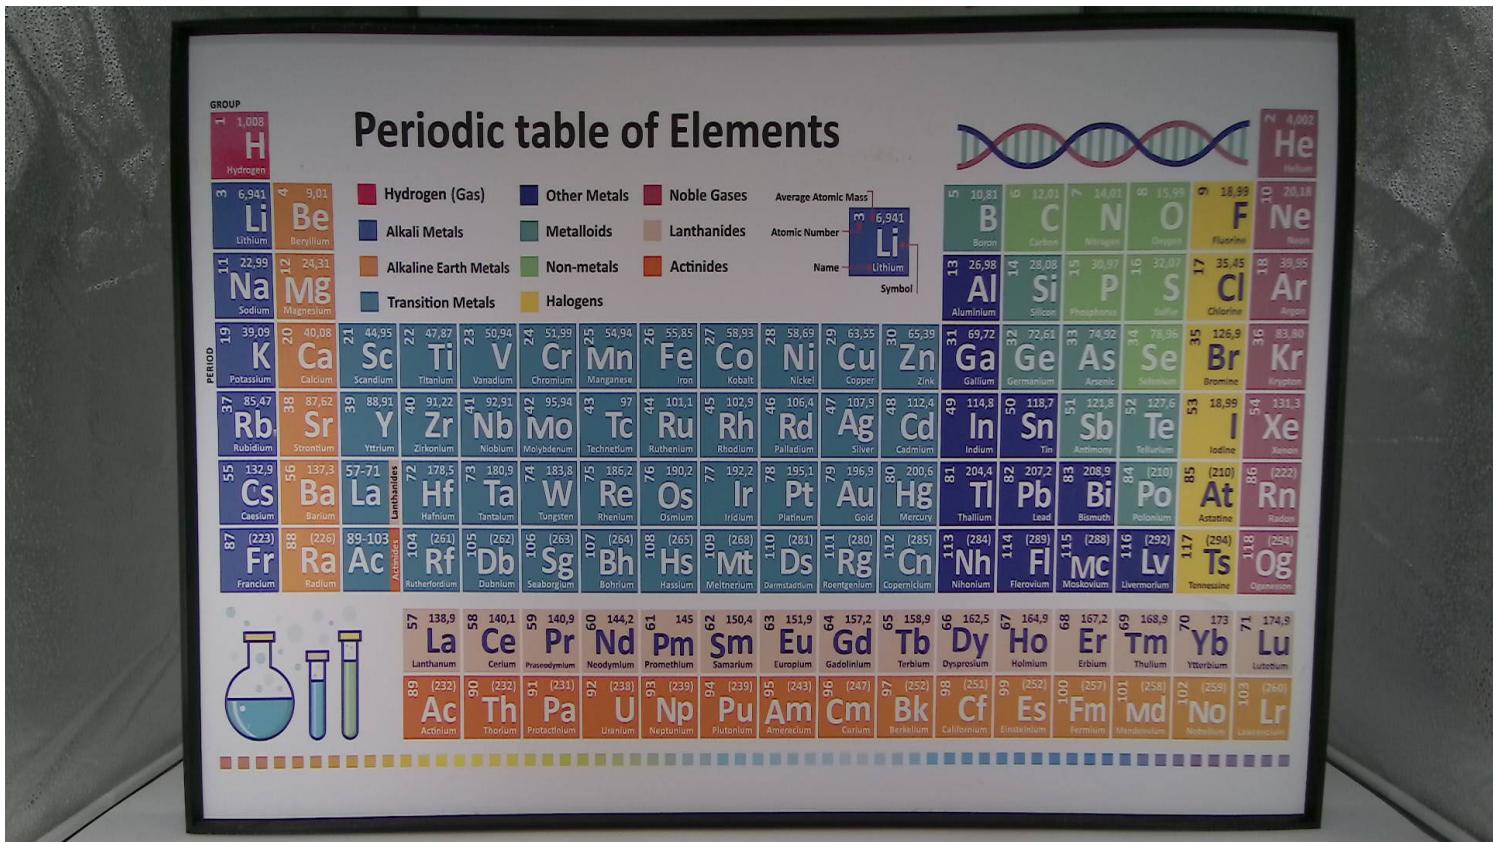

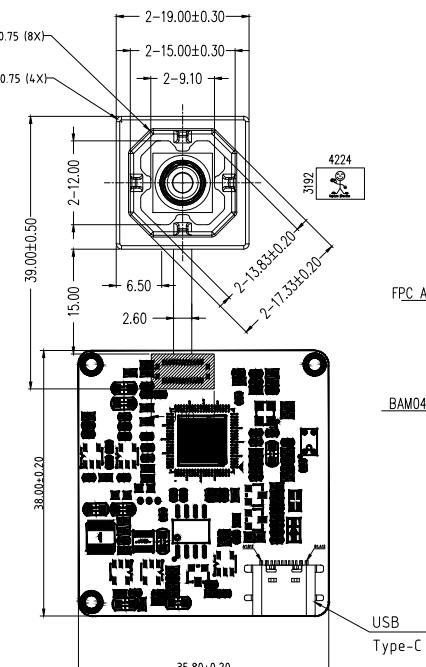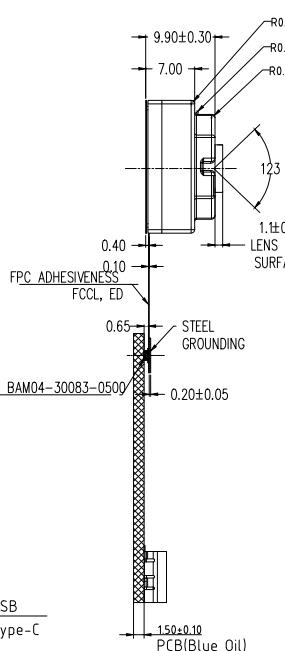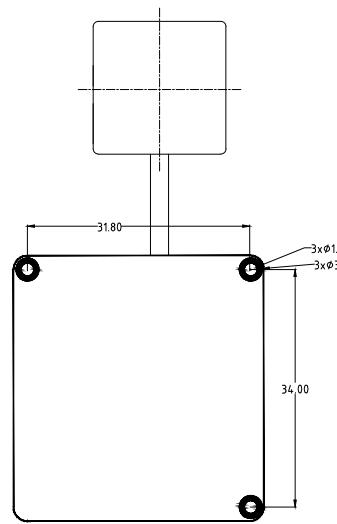A	B	C	D	E																																				
ROHS				<table border="1"> <tr> <td>Version</td><td>Information</td></tr> <tr> <td>V1.0</td><td>First Version</td></tr> <tr> <td>V1.2</td><td>Change lens</td></tr> </table>	Version	Information	V1.0	First Version	V1.2	Change lens																														
Version	Information																																							
V1.0	First Version																																							
V1.2	Change lens																																							
1	<table border="1"> <tr><td>A1</td><td>GND</td><td>B12</td><td>GND</td></tr> <tr><td>A4</td><td>VBUS</td><td>B9</td><td>VBUS</td></tr> <tr><td>A5</td><td>CC1</td><td>B8</td><td>SBU2</td></tr> <tr><td>A6</td><td>DP1</td><td>B7</td><td>DN2</td></tr> <tr><td>A7</td><td>DN1</td><td>B6</td><td>DP2</td></tr> <tr><td>A8</td><td>SBU1</td><td>B5</td><td>CC2</td></tr> <tr><td>A9</td><td>VBUS</td><td>B4</td><td>VBUS</td></tr> <tr><td>A12</td><td>GND</td><td>B1</td><td>GND</td></tr> <tr> <td>PIN</td><td>SIGNAL NAME</td><td>PIN</td><td>SIGNAL NAME</td></tr> </table>	A1	GND	B12	GND	A4	VBUS	B9	VBUS	A5	CC1	B8	SBU2	A6	DP1	B7	DN2	A7	DN1	B6	DP2	A8	SBU1	B5	CC2	A9	VBUS	B4	VBUS	A12	GND	B1	GND	PIN	SIGNAL NAME	PIN	SIGNAL NAME			
A1	GND	B12	GND																																					
A4	VBUS	B9	VBUS																																					
A5	CC1	B8	SBU2																																					
A6	DP1	B7	DN2																																					
A7	DN1	B6	DP2																																					
A8	SBU1	B5	CC2																																					
A9	VBUS	B4	VBUS																																					
A12	GND	B1	GND																																					
PIN	SIGNAL NAME	PIN	SIGNAL NAME																																					
2		TOP VIEW	SIDE VIEW	BOTTOM VIEW																																				
3	<p><u>Parameters:</u></p> <p><u>1、Sensor specification:</u></p> <p>Image Sensor: IMX258</p> <p>Pixel: 1.12um×1.12um</p> <p>Lens Type: 1/3.06</p> <p>Important Voltage Description:</p> <p>DVDD1.2V (external power supply);</p>	<p><u>2、Lens specification:</u></p> <p>FOV: 123°(D);102°(H);84°(V);</p> <p>F/NO.: 2.2</p> <p>TV distortion: <-8.7%</p> <p>Focal length: 1.9mm</p> <p>Composition: 5P+IR FILTER</p> <p>IR Cut Coating: 650nm±10nm@50%</p>	<p>Kai Lap Technologies Group Ltd</p> <table border="1"> <tr> <td>Designed By</td> <td>Kevin</td> <td>Model Name:</td> <td colspan="2">KLT-OIS-USB4A-FF-IMX258 V1.2</td> </tr> <tr> <td>Checked By</td> <td>Jacky</td> <td>Projection Type:</td> <td>Unit: mm</td> <td>Date: 5/29/2025</td> </tr> <tr> <td></td> <td></td> <td>Third Angle</td> <td>Scale: 1:1</td> <td>Sheet: 1 of 1</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>Version: 1/0</td> </tr> </table>		Designed By	Kevin	Model Name:	KLT-OIS-USB4A-FF-IMX258 V1.2		Checked By	Jacky	Projection Type:	Unit: mm	Date: 5/29/2025			Third Angle	Scale: 1:1	Sheet: 1 of 1					Version: 1/0																
Designed By	Kevin	Model Name:	KLT-OIS-USB4A-FF-IMX258 V1.2																																					
Checked By	Jacky	Projection Type:	Unit: mm	Date: 5/29/2025																																				
		Third Angle	Scale: 1:1	Sheet: 1 of 1																																				
				Version: 1/0																																				
A	B	C	D	E																																				

[Product Brief]

Ver.1.0

IMX258

Diagonal 5.867 mm (Type 1/3.06) 13Mega-Pixel CMOS Image Sensor with Square Pixel for Color Cameras

Description

IMX258 is a diagonal 5.867mm (Type 1/3.06) 13 Mega-pixel CMOS active pixel type stacked image sensor with a square pixel array. It adopts Exmor RS™ technology to achieve high speed image capturing by column parallel A/D converter circuits and high sensitivity and low noise image (comparing with conventional CMOS image sensor) through the backside illuminated imaging pixel structure. R, G, and B pigment primary color mosaic filter is employed. By introducing spatially multiplexed exposure technology, high dynamic range still pictures and movies are achievable. It

equips an electronic shutter with variable integration time. It operates with three power supply voltages: analog 2.7 V, digital 1.2 V and 1.8 V for input/output interface and achieves low power consumption.

In addition, this product is designed for use in cellular phone and tablet pc. When using this for another application, Sony does not guarantee the quality and reliability of product. Therefore, don't use this for applications other than cellular phone and tablet pc. Consult your Sony sales representative if you have any questions.


Functions and Features

- ◆ Back-illuminated and stacked CMOS image sensor Exmor RSTM
- ◆ Phase Detection pixel data output for Phase Detection Auto Focus
- ◆ High Dynamic Range (HDR) mode with raw data output.
- ◆ High signal to noise ratio (SNR).
- ◆ Full resolution @30fps (Normal / HDR). 4K2K @30fps (Normal / HDR) 1080p @60fps (Normal)
- ◆ Output video format of RAW10/8.
- ◆ Pixel binning readout and V sub-sampling function.
- ◆ Independent flipping and mirroring.
- ◆ CSI-2 serial data output (MIPI 2lane/4lane, Max. 1.3Gbps/lane, D-PHY spec. ver. 1.1 compliant)
- ◆ 2-wire serial communication.
- ◆ Two PLLs for independent clock generation for pixel control and data output interface.
- ◆ Dynamic Defect Pixel Correction.
- ◆ Fast mode transition. (on the fly)
- ◆ Dual sensor synchronization operation.
- ◆ 4K bit of OTP ROM for users.
- ◆ Built-in temperature sensor.

Device Structure

- ◆ CMOS image sensor
- ◆ Image size : Diagonal 5.867 mm (Type 1/3.06)
- ◆ Total number of pixels : 4224 (H) x 3192 (V) approx. 13.48 M pixels
- ◆ Number of effective pixels : 4224 (H) x 3144 (V) approx. 13.28 M pixels
- ◆ Number of active pixels : 4208 (H) x 3120 (V) approx. 13.13 M pixels
- ◆ Chip size : 5.990 mm (H) x 3.908 mm (V)
- ◆ Unit cell size : 1.12 μ m (H) x 1.12 μ m (V)
- ◆ Substrate material : Silicon

System block diagram

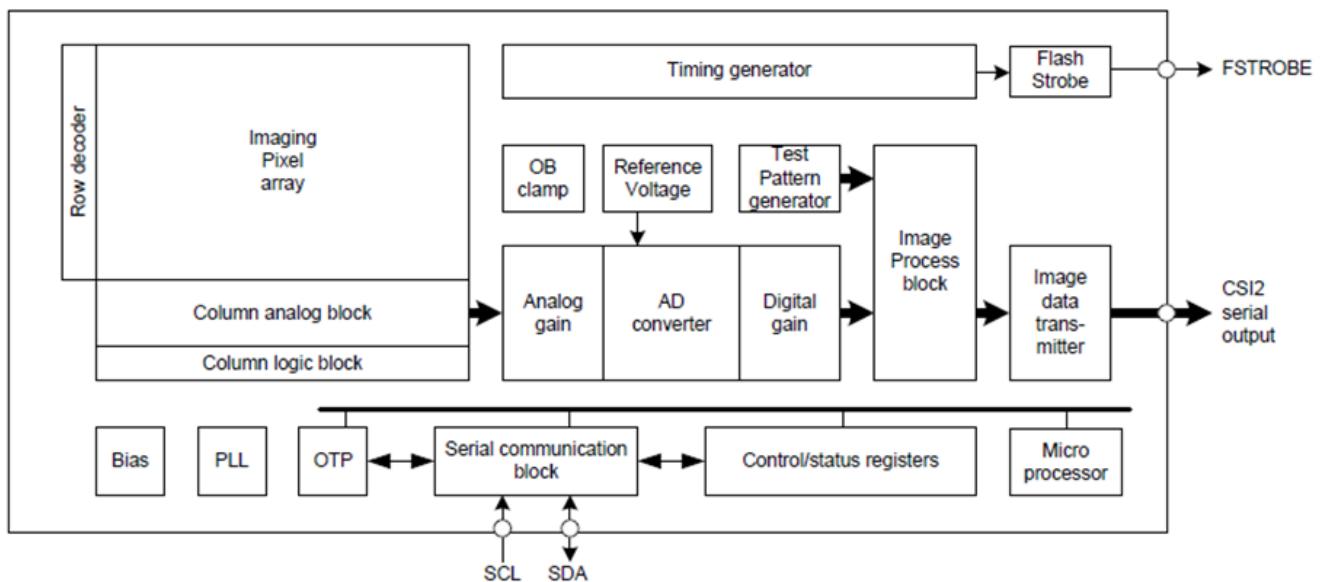

Exmor RS

* Exmor RS is a trademark of Sony Corporation. The Exmor RS is a Sony's CMOS image sensor with high-resolution, high-performance and compact size by replacing a supporting substrate in Exmor R™ which changed fundamental structure of Exmor™ pixel adopted column parallel A/D converter to back-illuminated type, with layered chips formed signal processing circuits.

Cameras Applications



Automotive Driver Pilot




Live Streaming



Video Conference




Eye Tracker Biometric Detection

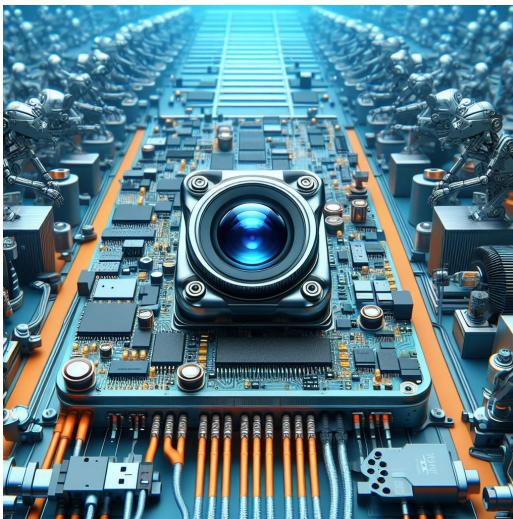

Machine Vision



Agricultural Monitor

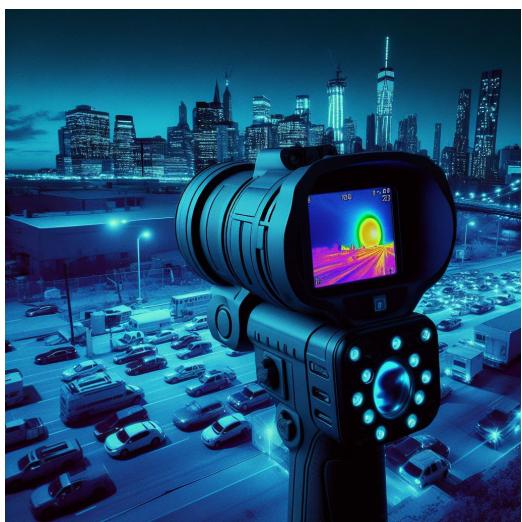

Night Vision Security




Drone and Sports Eagle Eyes



Interactive Pet Camera

Cameras Applications



Camera Module Pinout Definition Reference Chart

Pin Signal	Description
DGND GND	ground for digital circuit
AGND	ground for analog circuit
PCLK DCK	DVP PCLK output
XCLR PWDN XSHUTDOWN STANDBY	power down active high with internal pull-down resistor
MCLK XVCLK XCLK INCK	system input clock
RESET RST	reset active low with internal pull-up resistor
NC NULL	no connect
SDA SIO_D SIOD	SCCB data
SCL SIO_C SIOC	SCCB input clock
VSYNC XVS FSYNC	DVP VSYNC output
HREF XHS	DVP HREF output
DOVDD	power for I/O circuit
AFVDD	power for VCM circuit
AVDD	power for analog circuit
DVDD	power for digital circuit
STROBE FSTROBE	strobe output
FSIN	synchronize the VSYNC signal from the other sensor
SID	SCCB last bit ID input
ILPWM	mechanical shutter output indicator
FREX	frame exposure / mechanical shutter
GPIO	general purpose inputs
SLASEL	I2C slave address select
AFEN	CEN chip enable active high on VCM driver IC
MIPI Interface	
MDN0 DN0 MD0N DATA_N DMO1N	MIPI 1st data lane negative output
MDP0 DP0 MD0P DATA_P DMO1P	MIPI 1st data lane positive output
MDN1 DN1 MD1N DATA2_N DMO2N	MIPI 2nd data lane negative output
MDP1 DP1 MD1P DATA2_P DMO2P	MIPI 2nd data lane positive output
MDN2 DN2 MD2N DATA3_N DMO3N	MIPI 3rd data lane negative output
MDP2 DP2 MD2P DATA3_P DMO3P	MIPI 3rd data lane positive output
MDN3 DN3 MD3N DATA4_N DMO4N	MIPI 4th data lane negative output
MDP3 DP3 MD3P DATA4_P DMO4P	MIPI 4th data lane positive output
MCN CLKN CLK_N DCKN	MIPI clock negative output
MCP CLKP MCP CLK_P DCKN	MIPI clock positive output
DVP Parallel Interface	
D0 DO0 Y0	DVP data output port 0
D1 DO1 Y1	DVP data output port 1
D2 DO2 Y2	DVP data output port 2
D3 DO3 Y3	DVP data output port 3
D4 DO4 Y4	DVP data output port 4
D5 DO5 Y5	DVP data output port 5
D6 DO6 Y6	DVP data output port 6
D7 DO7 Y7	DVP data output port 7
D8 DO8 Y8	DVP data output port 8
D9 DO9 Y9	DVP data output port 9
D10 DO10 Y10	DVP data output port 10
D11 DO11 Y11	DVP data output port 11

Camera Reliability Test

Reliability Inspection Item		Testing Method	Acceptance Criteria	
Category	Item			
Environmental	Storage Temperature	High 60°C 96 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 96 Hours	Temperature Chamber	No Abnormal Situation
	Operation Temperature	High 60°C 24 Hours	Temperature Chamber	No Abnormal Situation
		Low -20°C 24 Hours	Temperature Chamber	No Abnormal Situation
	Humidity	60°C 80% 24 Hours	Temperature Chamber	No Abnormal Situation
	Thermal Shock	High 60°C 0.5 Hours Low -20°C 0.5 Hours Cycling in 24 Hours	Temperature Chamber	No Abnormal Situation
Physical	Drop Test (Free Falling)	Without Package 60cm	10 Times on Wood Floor	Electrically Functional
		With Package 60cm	10 Times on Wood Floor	Electrically Functional
	Vibration Test	50Hz X-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Y-Axis 2mm 30min	Vibration Table	Electrically Functional
		50Hz Z-Axis 2mm 30min	Vibration Table	Electrically Functional
	Cable Tensile Strength Test	Loading Weight 4 kg 60 Seconds Cycling in 24 Hours	Tensile Testing Machine	Electrically Functional
Electrical	ESD Test	Contact Discharge 2 KV	ESD Testing Machine	Electrically Functional
		Air Discharge 4 KV	ESD Testing Machine	Electrically Functional
	Aging Test	On/Off 30 Seconds Cycling in 24 Hours	Power Switch	Electrically Functional
	USB Connector	On/Off 250 Times	Plug and Unplug	Electrically Functional



Inspection Item		Inspection Method	Standard of Inspection
Category	Item		
Appearance	FPC/ PCB	Color	The Naked Eye
		Be Torn/Chopped	The Naked Eye
		Marking	The Naked Eye
	Holder	Scratches	The Naked Eye
		Gap	The Naked Eye
		Screw	The Naked Eye
		Damage	The Naked Eye
	Lens	Scratch	The Naked Eye
		Contamination	The Naked Eye
		Oil Film	The Naked Eye
		Cover Tape	The Naked Eye
Function	Image	No Communication	Test Board
		Bright Pixel	Black Board
		Dark Pixel	White board
		Blurry	The Naked Eye
		No Image	The Naked Eye
		Vertical Line	The Naked Eye
		Horizontal Line	The Naked Eye
		Light Leakage	The Naked Eye
		Blinking Image	The Naked Eye
		Bruise	Inspection Jig
		Resolution	Chart
		Color	The Naked Eye
		Noise	The Naked Eye
		Corner Dark	Less Than 100px By 100px
		Color Resolution	The Naked Eye
Dimension	Dimension	Height	The Naked Eye
		Width	The Naked Eye
		Length	The Naked Eye
		Overall	The Naked Eye




CMOS CAMERA MODULES

your *BEST* camera module partner

KLT Package Solutions

KLT Camera Module

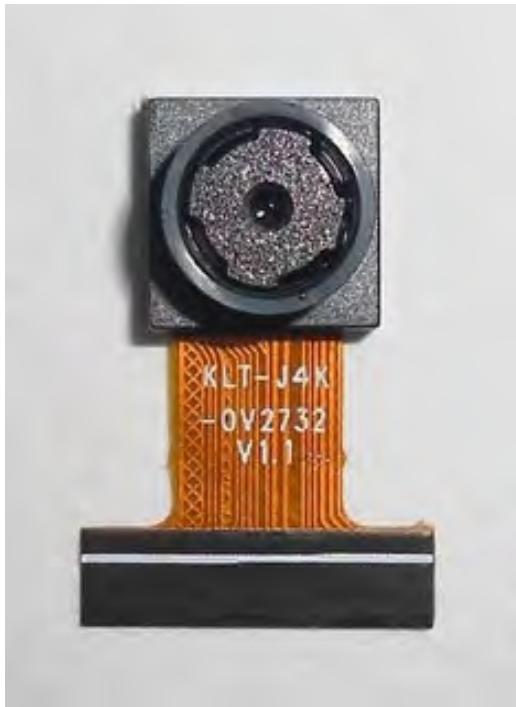


Complete with Lens Protection Film



Tray with Grid and Space



Place Cameras on the Tray

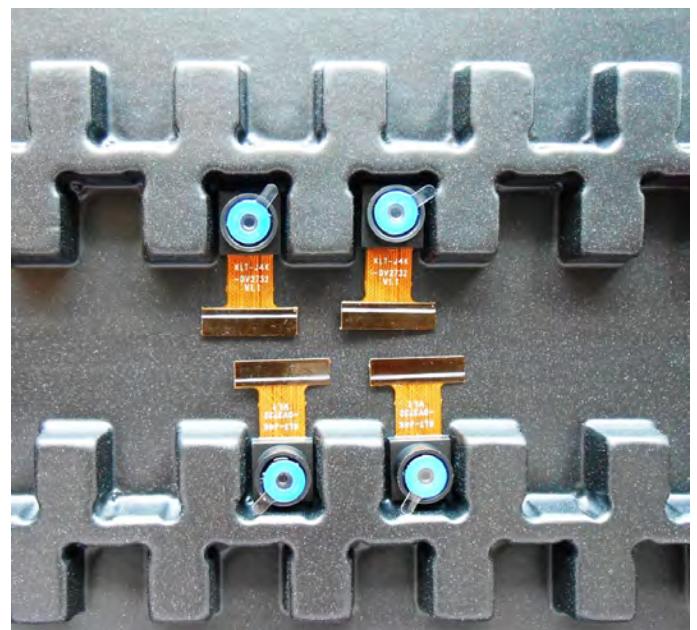

Camera Modules Package Solution

Full Tray of Cameras




Cover Tray with Lid



Put Tray into Anti-Static Bag



Vacuum the Anti-Static Bag

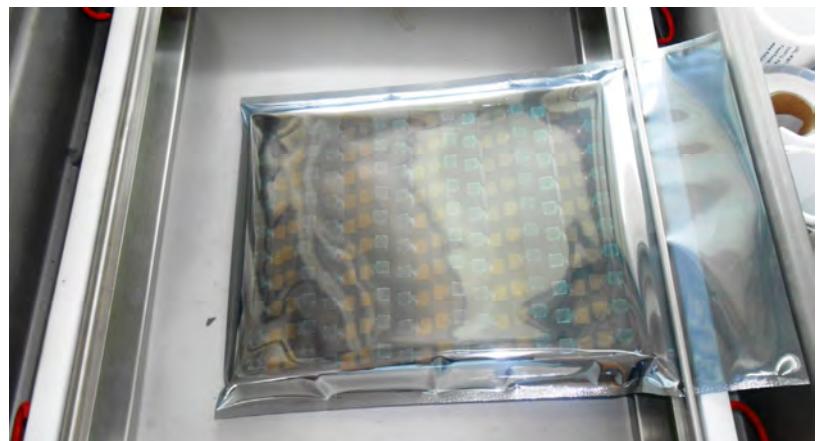



CMOS CAMERA MODULES

your *BEST* camera module partner



Camera Modules Package Solution

Sealed Vacuum Bag with Labels

1. Model and Description 2. Quantity 3. Shipping Date 4. Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

Large Order Package Solution

Place Foam Sheets Between Trays



Foam Sheets are Slightly Larger than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting Box





CMOS CAMERA MODULES

your BEST camera module partner

Small Order Package Solution

Place Foam Sheets and Trays into Small Box



Foam Sheets are Nicely Fitting the Small Box



Package in Small Box for Shipment

Place Small Boxes into Larger Box



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.



CMOS CAMERA MODULES

your *BEST* camera module partner

Carbon Box Package Solution

Seal the Carbon Box

Final Package Labelled Box



Carbon Box Ready for Shipment

1. Delivery Address and Phone No. 2. Box No. and Ship Date 3. Fragile Caution



www.KaiLapTech.com sales@KaiLapTech.com Tel: (852) 6908 1256 Fax: (852) 3017 6778

All rights reserved @ Kai Lap Technologies Group Ltd. Specifications subject to change without notice.

Sample Order Package Solution

Place Sample into Small Anti-Static Bag



Place Connectors into Small Ant-Static Bag



Sample Labels on the Small Bag

1. Camera Module or Connector Model 2. Shipping Date and Quantity 3. Caution





Connectors Large Order Package Solution

Connectors in a Wheel



Label Connectors in the Wheel



The Wheel is Perfectly Fitting the Box



Connectors Box Ready for Shipment




Company Kai Lap Technologies (KLT)

Kai Lap Technologies Group Limited. (KLT) was established in 2009, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. KLT is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

KLT provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. KLT specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.

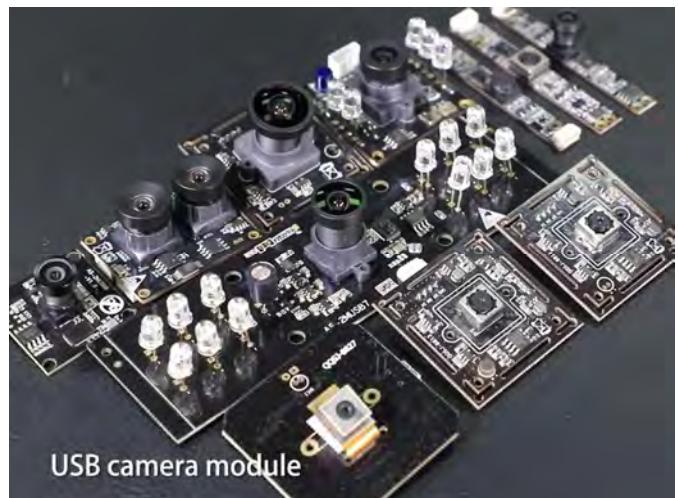**Limited Warranty**

KLT provides the following limited warranty if you purchased the Product(s) directly from KLT company or from KLT's website, www.KaiLapTech.com. Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. KLT guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, KLT will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of KLT is solely limited to repair and/or replacement on the terms set forth above. KLT is not reliable or responsible for any subsequent events.



KLT Strength

Powerful Factory



Professional Service



Promised Delivery

